
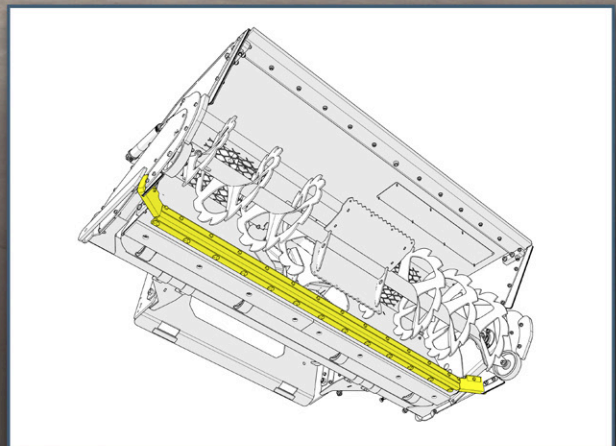


MUSKOX

PARTS MANUAL

MODEL 26-84

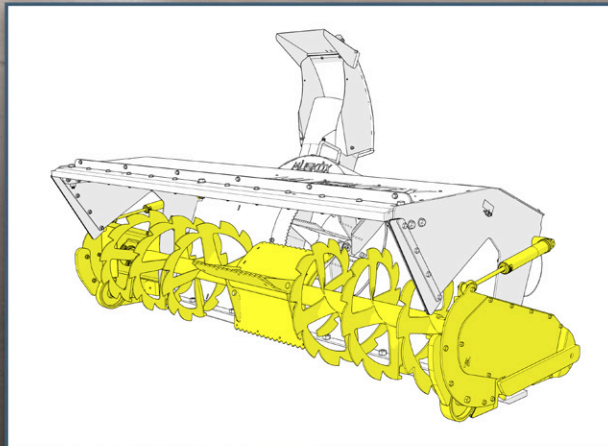

601 FIRST STREET NORTH | MENTOR, MN 56736
PH: 218.288.1905 | WEB: WWW.MUSKOXMN.COM

TABLE OF CONTENTS

PREFACE	4	IMPELLER MOTOR	25
MAINTENANCE VIDEOS AND RESOURCES ..	5	LOADER HOSES	
ADJUSTABLE ATTACHMENT PLATE	6	STANDARD	26
BACKDRAG POLES	7	BOBCAT	27
CHUTE & CHUTE MOTOR	8	SINGLE ARM LOADERS	28
CUTTING EDGES		LOADER HOSE BRACKET	29
LOWER RUBBER CUT EDGE	9	IMPELLER	30
LOWER STEEL CUT EDGE	10	LEVELING WHEEL	31
TOP RUBBER CUT EDGE	12	PIVOT ARM SYSTEM	
REPLACEMENT DECAL GRAPHICS	13	MAIN COMPONENTS	32
ELECTRONICS	14	ACCESS PANELS	33
WIRING HARNESS SETUP	15	AUGER	34
GLIDE PLATE		AUGER MOTOR ASSEMBLY	35
UHMW PLASTIC	16	LEFT SIDE - COG BELT	36
UHMW WHEELS	17	RIGHT SIDE	37
HYDRAULICS		CURB GUARD	38
CONTROL BLOCK ASSY	18	SHOCKS	39
AUGER FLOW CONTROL BLOCK	20	WEARABLES	40
AUGER HOSES	21	RUBBER SNOW GUIDES	41
CHUTE DEFLECTION HOSES	22	BOLT TORQUE SPECIFICATIONS	42
CHUTE ROTATE HOSES	23		
IMPELLER HOSES	24		



PREFACE

INTRODUCTION

For your safety and continued proper operation, use only genuine MUSKOX service parts. When ordering service parts, specify the correct part number, full description, quantity required, and the unit model number and serial number.


The serial number plate is located on the top left side of the blower (see below).

MUSKOX reserves the right to make changes or improvements in the design or construction of any part of the unit without incurring the obligation to install such changes on any previously delivered units.

NOTE: The illustrations and data used in this manual were current (according to the information available to us) at the time of printing; however, we reserve the right to redesign and change the attachment as may be necessary without notification.

Standard attaching hardware torque values are provided on page 42 of this manual.

Items shown in the parts list that do not have part numbers are shown for reference purposes only and are NOT available for purchase.

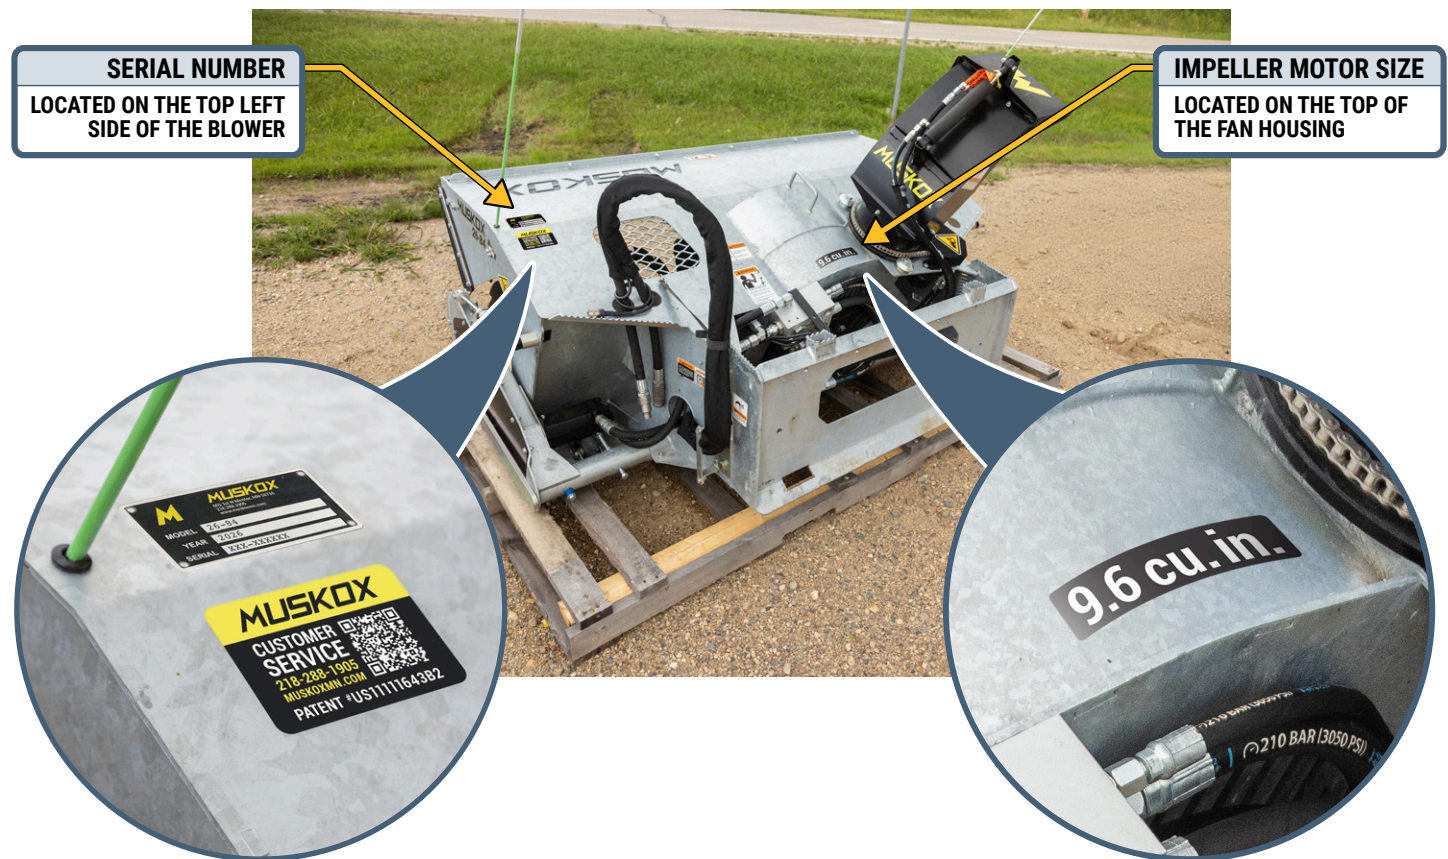

For the most updated information on MUSKOX products and services, please visit www.muskoxmn.com/support. There you will find service and maintenance videos, tips, advice and more.

MAINTENANCE VIDEOS AND RESOURCES



▼ MODEL 26-84



2:19 / 4:42 • Loosening Bracket >


**MUSKOX 23-78 MAINTENANCE:**
INSTALLING LEVELING WHEEL

TIME	STEP
:06	SAFETY NOTE
:31	INTRO
1:23	CUTTING TEMPLATE
2:43	DRILL HOLES
3:23	INSTALL LEVELING WHEEL

**MUSKOX**

**MUSKOX 23-78 MAINTENANCE:**
REPLACING OR ADJUSTING THE RUBBER CUT EDGE

TIME	STEP
:06	LOOSENING TOP METAL BRACKET
1:06	ADJUSTING RUBBER CUT EDGE DEPTH
3:44	REMOVING RUBBER CUT EDGE
4:50	FLIPPING/REPLACING RUBBER
5:16	REASSEMBLY
6:52	ADJUSTING RUBBER CUT EDGE DEPTH

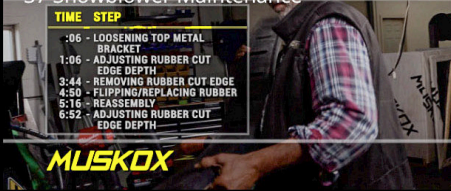**MUSKOX**

**MUSKOX 23-78 MAINTENANCE:**
REPLACING SIDE FLIPPER UHMW

TIME	STEP
:06	REMOVING SIDE FLIPPER UHMW WEAR STRIP
:44	INSTALLING SIDE FLIPPER UHMW WEAR STRIP

**MUSKOX**

← Prev Next →

LOCATING MAINTENANCE VIDEOS AND RESOURCES

To review our extensive library of step-by-step maintenance videos and resources, please visit www.muskoxmn.com/support or simply use the QR code to the right.




ADJUSTABLE ATTACHMENT PLATE

▼ MODEL 26-84



PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

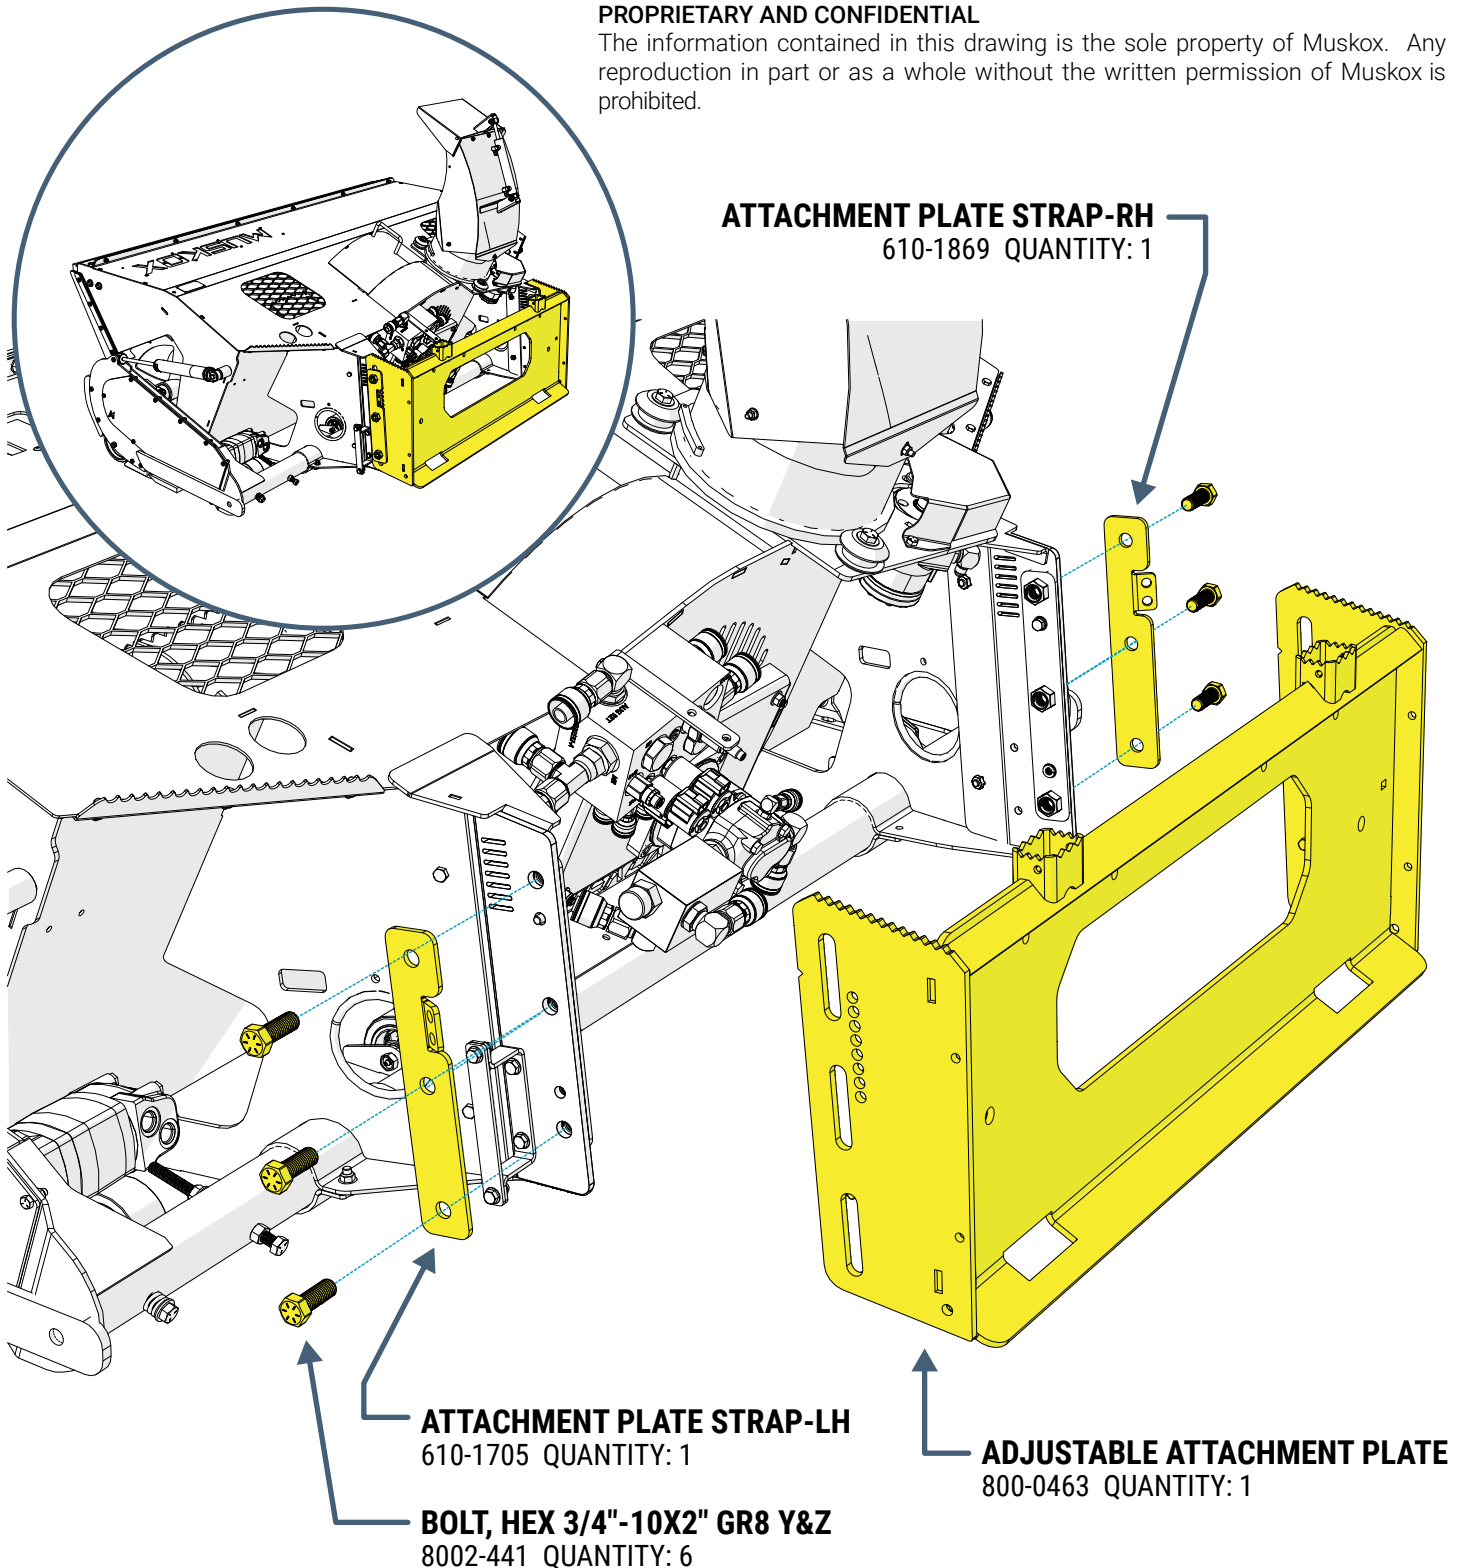

VIDEO TUTORIAL TO SET THE CORRECT
HEIGHT ADJUSTMENT FOR YOUR SKID STEER

SCAN
HERE!



BACKDRAG POLES



▼ MODEL 26-84

PROPRIETARY AND CONFIDENTIAL


The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

BACKDRAG POLE SET

700-1505

INCLUDES

- FIBERGLASS, GUIDE POLE-3/8"X43"
611-0101 QUANTITY: 2
- NUT, FLG NYL-1/4"-Z&C
8041-001 QUANTITY: 4
- POINTER, GUIDE POLE
610-1728 QUANTITY: 2
- U-BOLT, 1/4"-POLE
8044-005 QUANTITY: 2

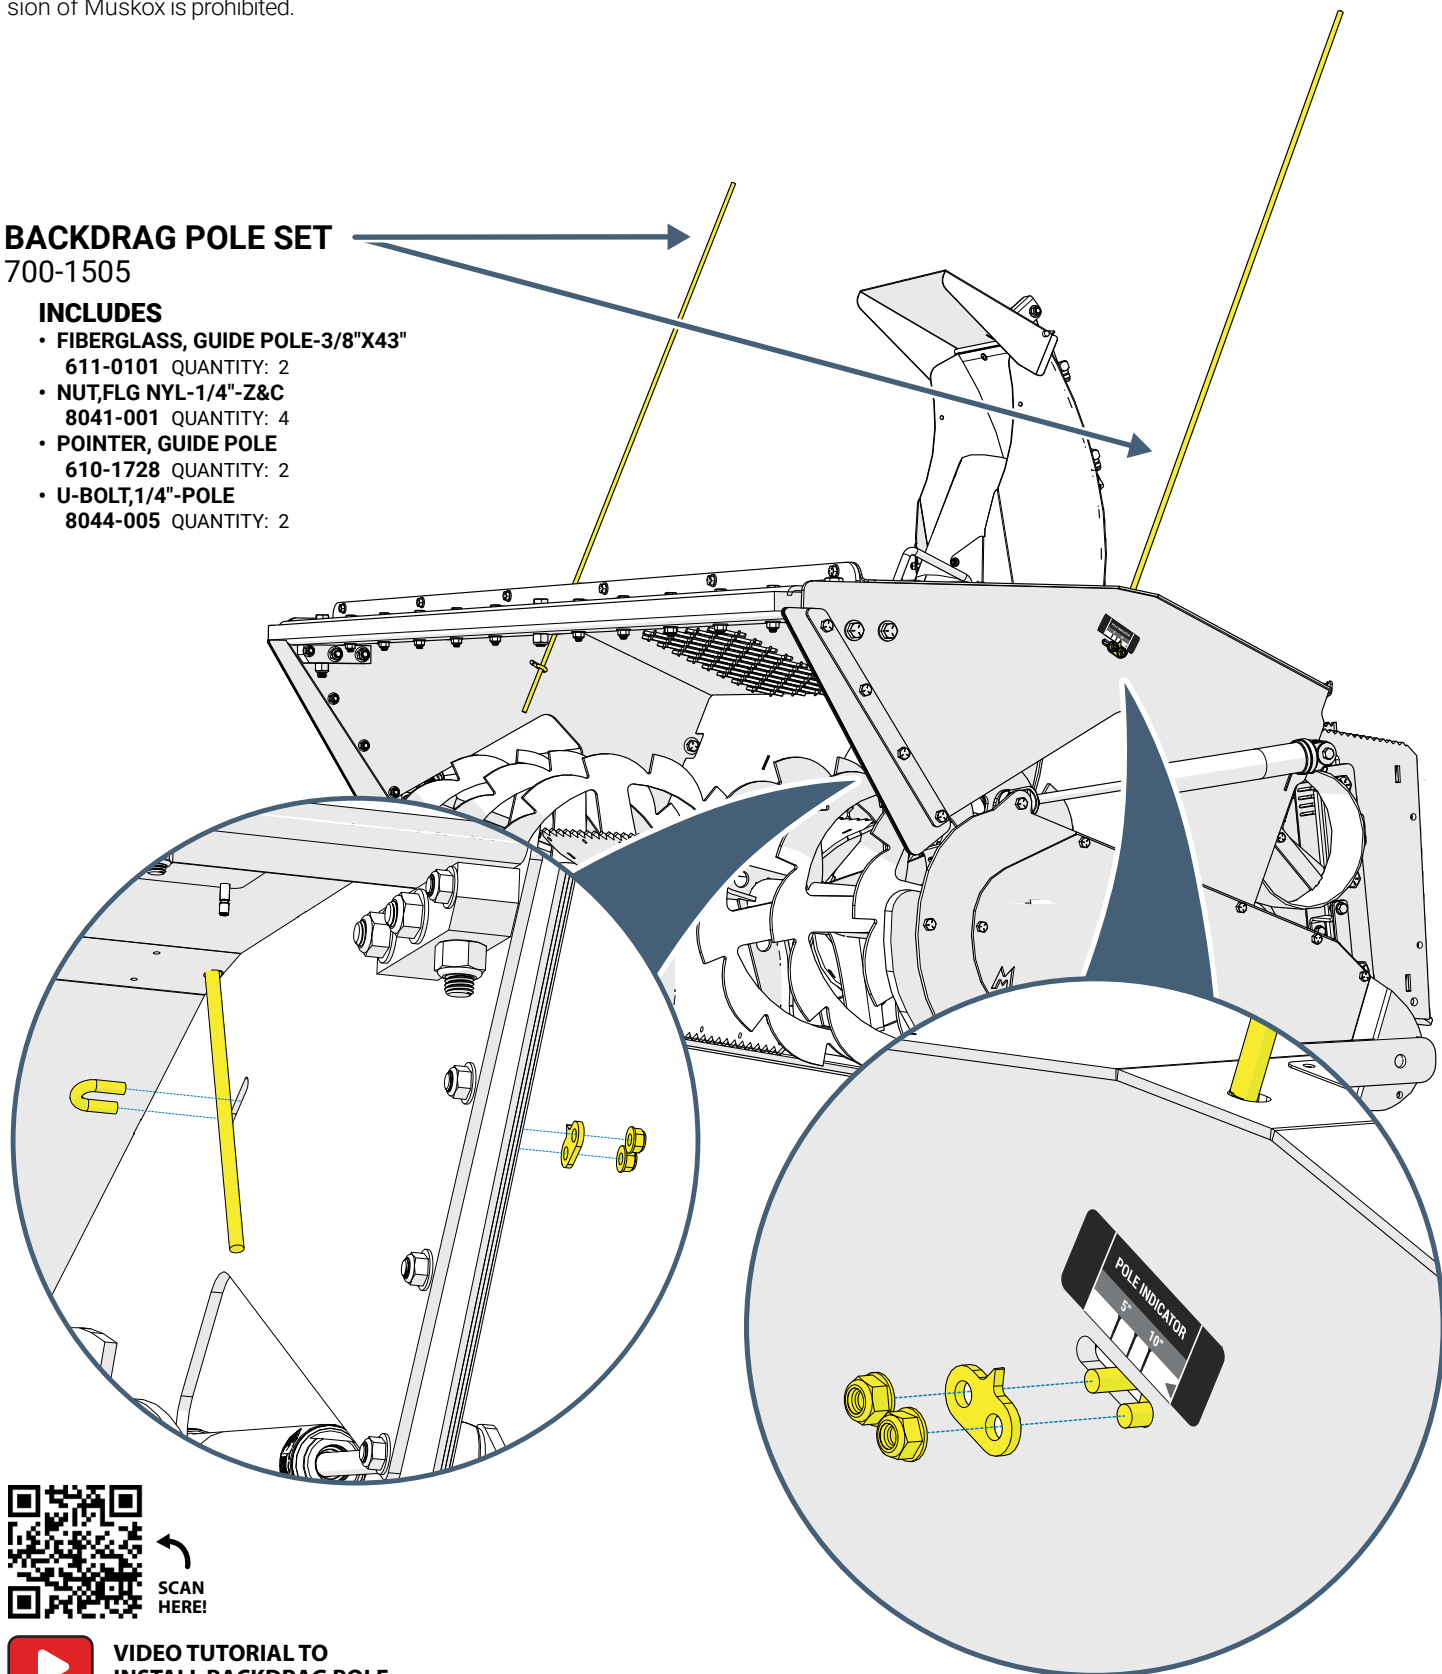

SCAN
HERE!



VIDEO TUTORIAL TO
INSTALL BACKDRAG POLE

CHUTE & CHUTE MOTOR

▼ **MODEL 26-84**



PROPRIETARY AND CONFIDENTIAL


The information contained in this drawing is the sole property of MuskoX. Any reproduction in part or as a whole without the written permission of MuskoX is prohibited.



SCAN
HERE!



**VIDEO TUTORIAL TO
REPLACE CHUTE CHAIN**

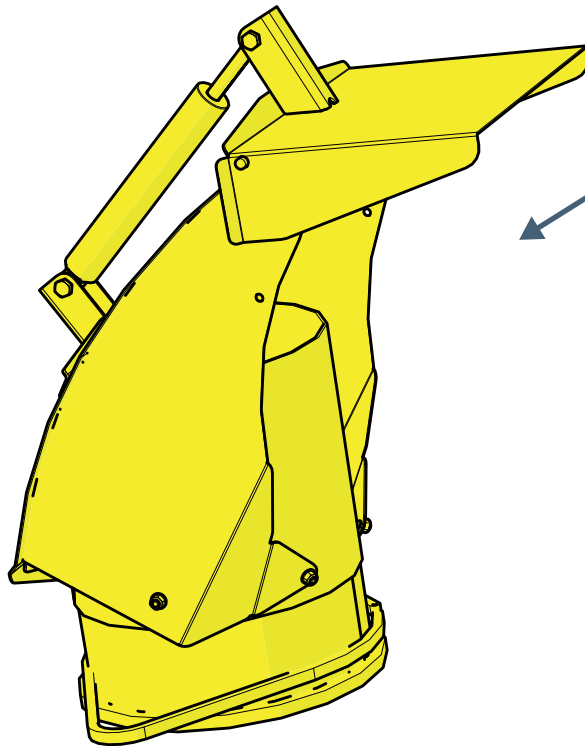

CHUTE, ASSY 700-0105


INCLUDES

- NUT, FLG NYL-3/8"-Z&C
QUANTITY: 2
- FITTING, 6MJ-4MORB-90 DEG
QUANTITY: 2
- CYLINDER, 10 1/2" 4"STK 1 3/4"-CHUTE
QUANTITY: 1
- CHUTE-WELDT
QUANTITY: 1
- CHUTE, ROTATION-WELDT
QUANTITY: 1
- BOLT, HEX-1/4"X3/4"-GR5 Z&C
QUANTITY: 7
- BOLT, HEX-3/8"X1 3/4"-GR5 Z&C
QUANTITY: 2
- SCREW, MACH, PAN HD 1/4"X1/2"-PHILLIPS
QUANTITY: 2
- NUT, FLG NYL-1/4"-Z&C
QUANTITY: 9
- GUARD, CHUTE-HMW-BLACK
QUANTITY: 1
- SHROUD, CHUTE-HMW-BLACK
QUANTITY: 1
- CHAIN, CHUTE-W/LINKS-#40 STAINLESS ROLLER
QUANTITY: 1

INDIVIDUAL PARTS AVAILABLE

CYLINDER, 10 1/2" 4"STK 1 3/4"-CHUTE
0809-609

CHAIN, CHUTE-W/LINKS-#40
STAINLESS ROLLER
620-0024



SPROCKET, 15T 1" BORE 40P
430-0003

CHUTE MOTOR-ASSY
700-0141

INCLUDES

- MOTOR, 2.8 CIR-CHUTE
QUANTITY: 1
- FITTING, 6MJ-10MORB-90 DEG
QUANTITY: 2
- SPROCKET, 15T 1" BORE 40P
QUANTITY: 1


GUARD, CHUTE-HMW-BLACK
611-0005

SHROUD, CHUTE-HMW-BLACK
611-0007

CHUTE, ROLLER-ASSY
700-0100

INCLUDES

- BOLT, HEX-1/2"X2 1/2"-GR5 Z&C
QUANTITY: 1
- NUT, FLG NYL-1/2"-Z&C
QUANTITY: 1
- ROLLER, CHUTE ROTATION-
TAPERED
QUANTITY: 1
- BUSHING, CHUTE ROLLER
QUANTITY: 1
- WASHER, FLAT, USS-1/2"-Z&C
QUANTITY: 2



SCAN
HERE!

**VIDEO TUTORIAL TO REPLACE
UHMW CHUTE LINER**




CUTTING EDGES: LOWER RUBBER CUT EDGE (OPTIONAL)

M

▼ **MODEL 26-84**

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

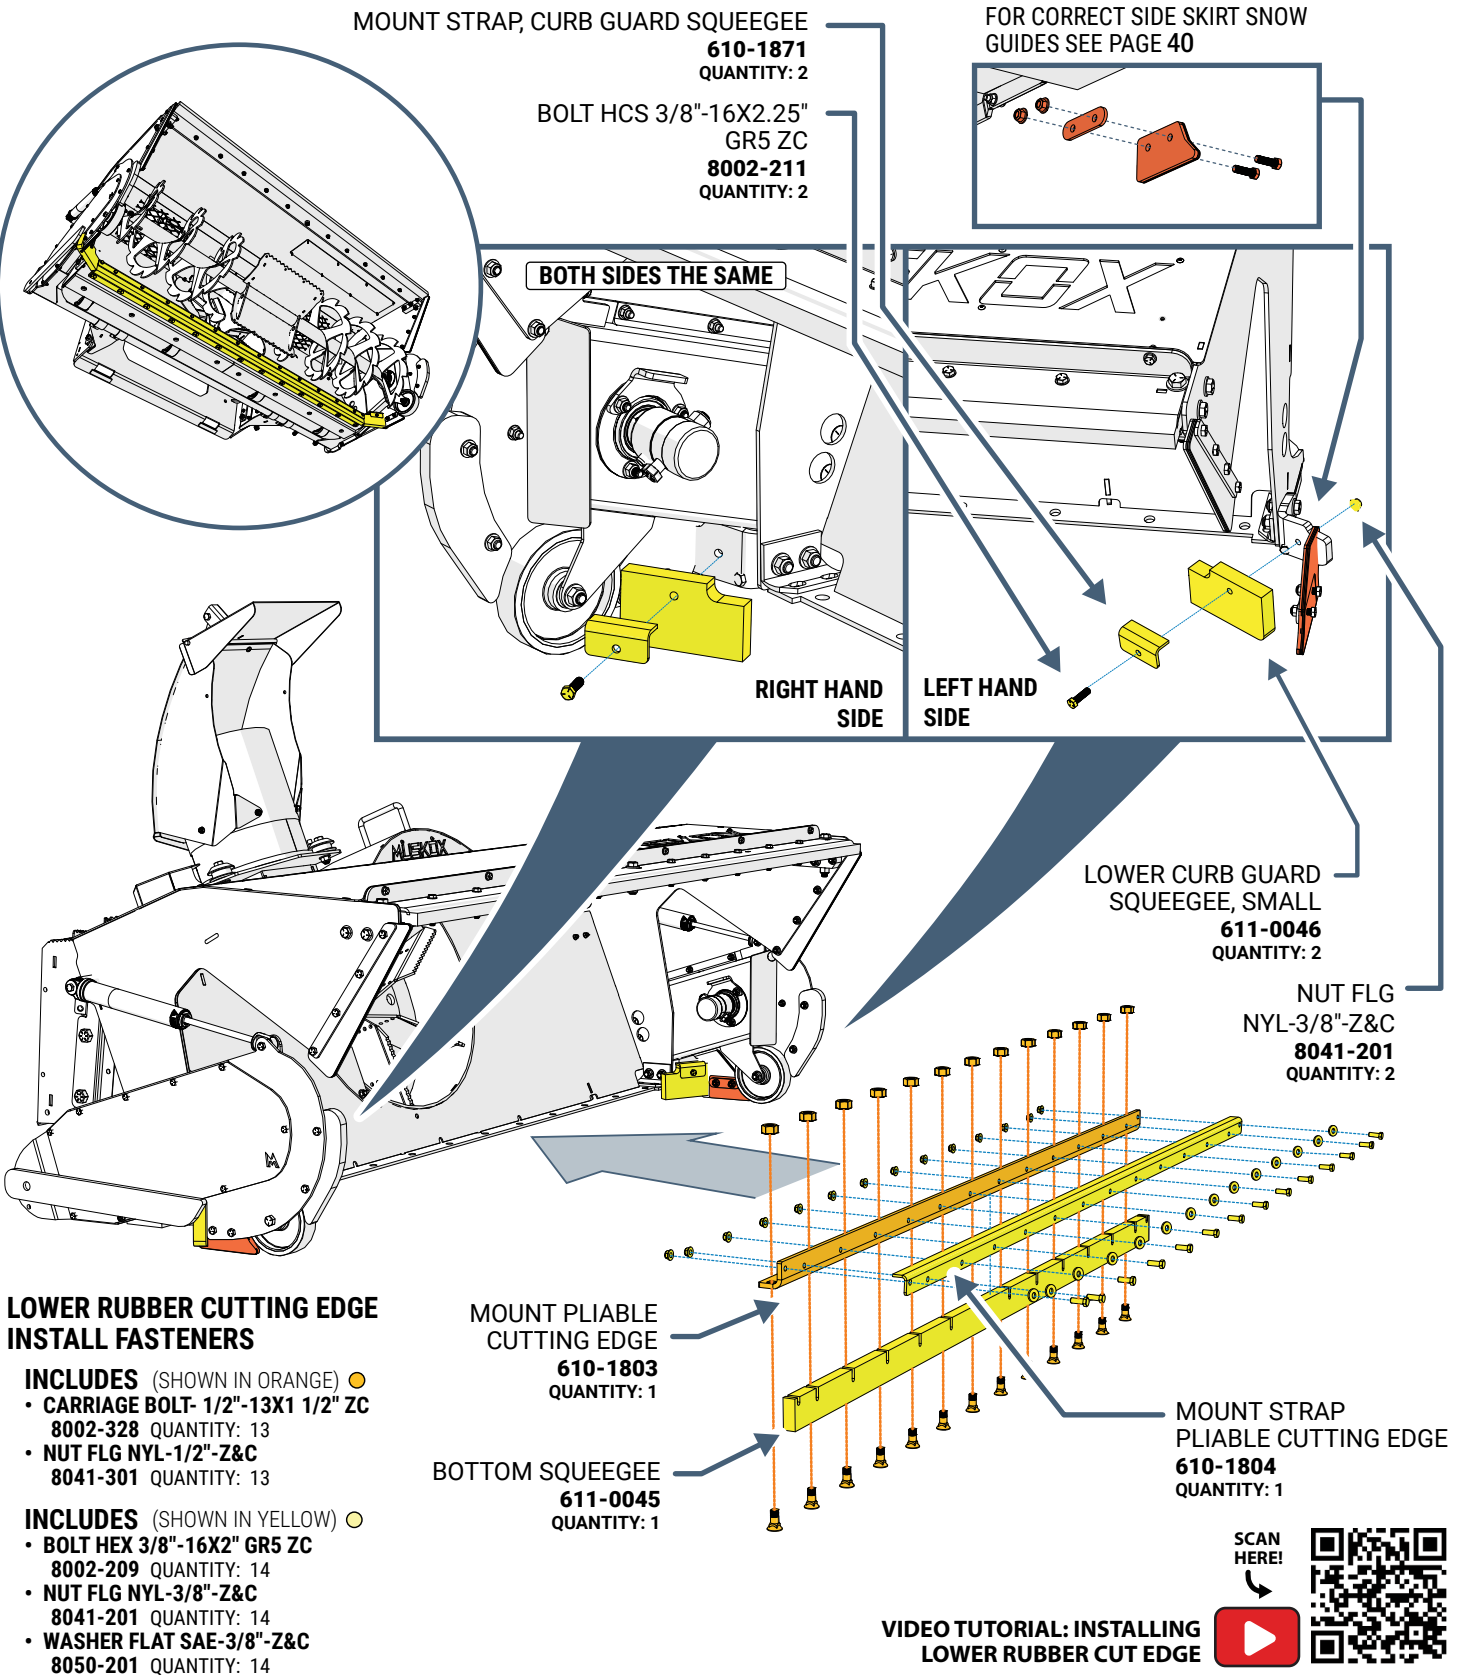


CUTTING EDGES: **LOWER STEEL CUT EDGE (STANDARD)**

▼ **MODEL 26-84**




PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

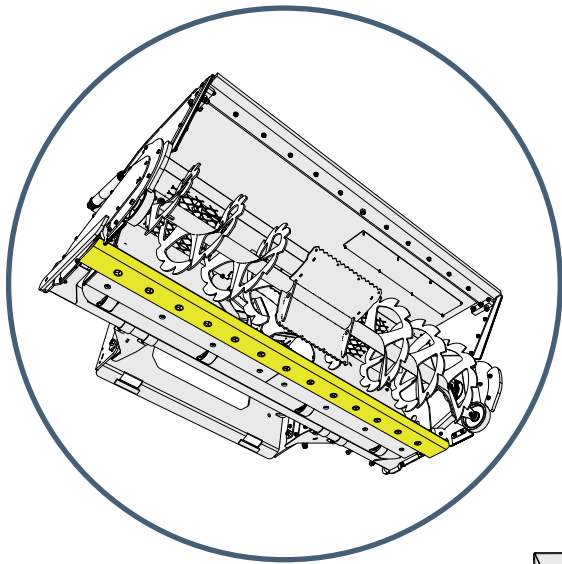

FOR CORRECT SIDE SKIRT SNOW GUIDES SEE PAGE 40


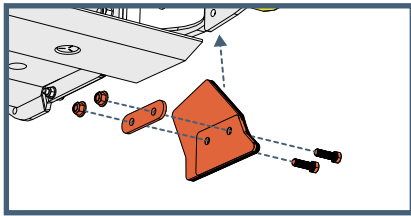


INCLUDES PARTS FOR BOTH SIDES

NUT FLG NYL-3/8"-Z&C
8041-201
QUANTITY: 2

METAL SIDE SKIRT
610-1873
QUANTITY: 2

HEX 3/8"-16X1.25" GR5 ZC
8002-206
QUANTITY: 2

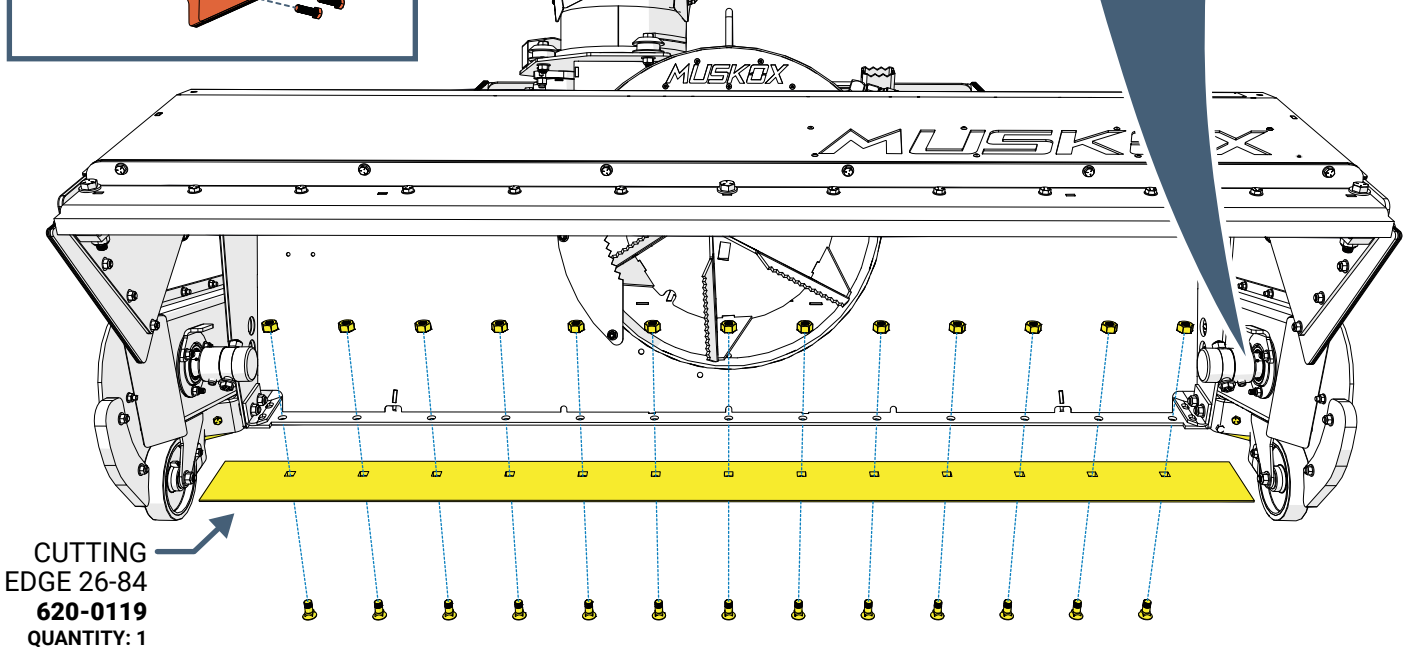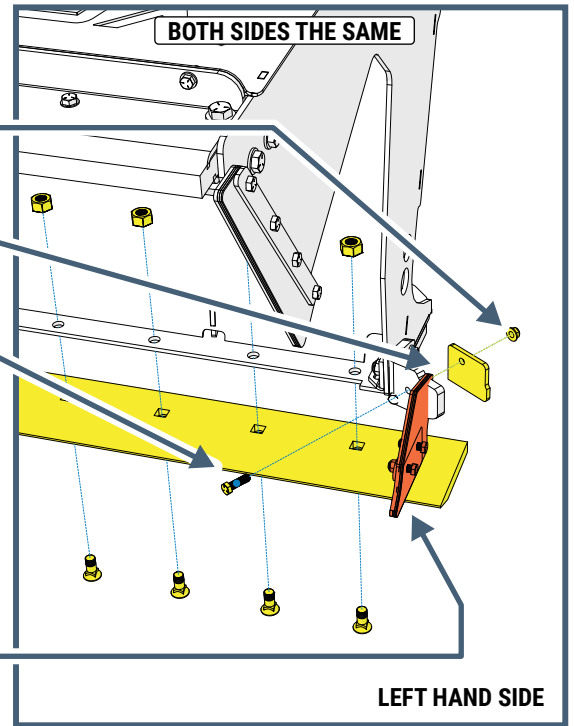

CUTTING EDGE 26-84
620-0119
QUANTITY: 1

LOWER STEEL CUTTING EDGE INSTALL FASTENERS

- INCLUDES** (SHOWN IN YELLOW) ●
- **BOLT PLOW-5/8"X1 1/2"-GR8 PLAIN**
8004-299 QUANTITY: 13
 - **NUT HEAVY HEX-5/8"-PLAIN**
8041-513 QUANTITY: 13

VIDEO TUTORIAL TO REPLACE LOWER STEEL CUT EDGE






CUTTING EDGES: TOP RUBBER CUT EDGE

▼ **MODEL 26-84**



PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

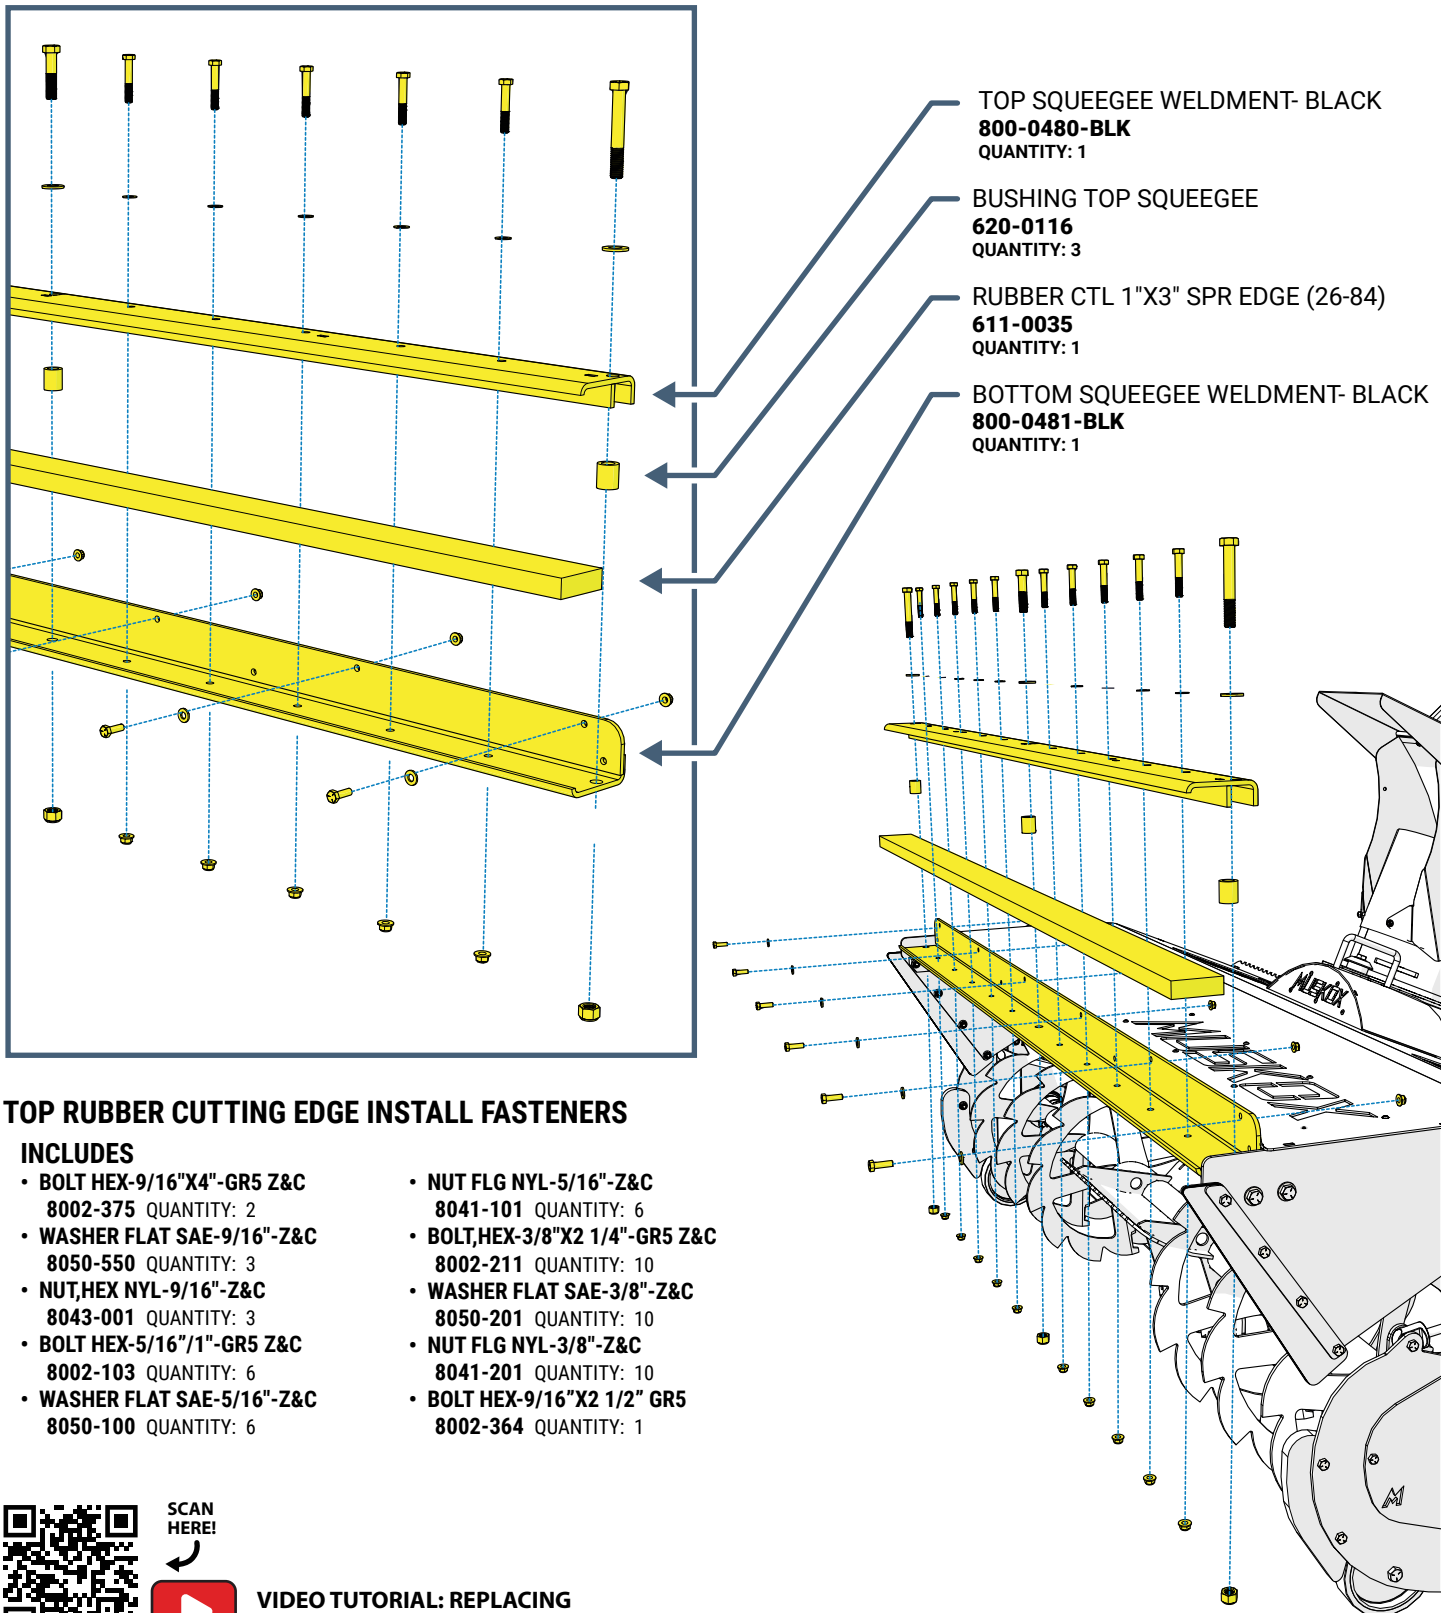

REPLACEMENT DECAL GRAPHICS



▼ MODEL 26-84

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of MuskoX. Any reproduction in part or as a whole without the written permission of MuskoX is prohibited.

FOR MUSKOX 26-84 GALVANIZED AND POLAR EDITION

GRAPHIC PACKAGE KIT

0309-2684 GW QUANTITY: 1



FOR MUSKOX 26-84 BLACK EDITION

GRAPHIC PACKAGE KIT

0309-2684 B QUANTITY: 1



ELECTRONICS

▼ MODEL 26-84



PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of MuskoX. Any reproduction in part or as a whole without the written permission of MuskoX is prohibited.

ELECTRICAL HARNESS* OPTIONS AVAILABLE

- HARNESS, 9' BLANK-8 PIN-ASSY
0109-615 QUANTITY: 1
- HARNESS, 9' BLANK-
W/JUMPER-14 PIN-ASSY
0109-616 QUANTITY: 1
- HARNESS, 10.5' BLANK-
14 PIN-ASSY
0109-617 QUANTITY: 1



SEE PAGE 15 FOR THE WIRING HARNESS
SPECIFIC TO YOUR UNIT

CONTROLLER, CANBUS- MAGNETIC (BOBCAT)*

0109-703 QUANTITY: 1

SCAN
HERE!



*CONTACT MUSKOX FOR PINOUT AND CONFIGURATION SPECIFIC TO YOUR UNIT

VIDEO TUTORIAL: CONFIGURING
14 PIN ELECTRICAL HARNESS



CONNECTING HARNESS TO HYDRAULIC BLOCK

CONNECTING SOLENOID WIRES TO HYDRAULIC BLOCK

LEFT SOLENOID


OUTER PLUG
ORANGE WIRE ①

INNER PLUG
WHITE WIRE ②

RIGHT SOLENOID

OUTER PLUG
③ RED WIRE


INNER PLUG
④ GREEN WIRE

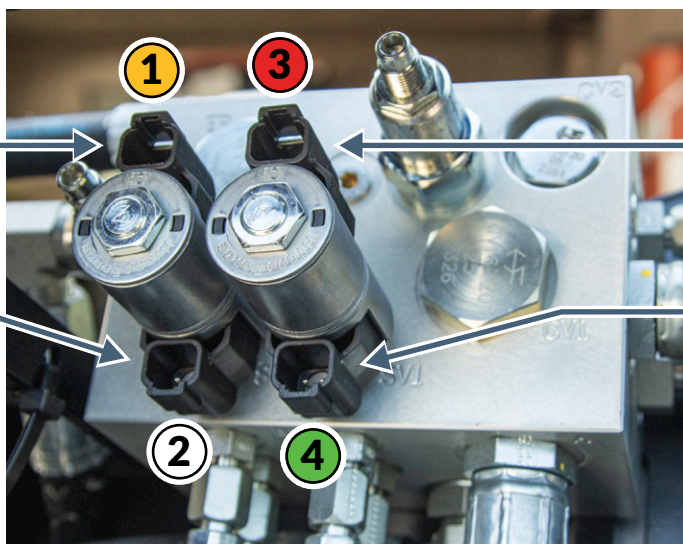

SCAN
HERE!



VIDEO TUTORIAL TO CONNECT
ELECTRONIC HARNESS




WIRING HARNESS SETUP

WIRE COLOR	WHITE ②	ORANGE ①	GREEN ④	RED ③
LOCATION OF PLUGS ON HYDRAULIC BLOCK	Left Solenoid: Inner Plug Wire FN: Deflector Up	Left Solenoid: Outer Plug Wire FN: Deflector Down	Right Solenoid: Inner Plug Wire FN: Rotate Right	Right Solenoid: Outer Plug Wire FN: Rotate Left
Harnesses will have tags indicating Brand	LOCATION OF PINS IN THE 14 PIN ALUMINUM LOADER PLUG			
Bobcat	E	F	G	H
John Deere	E	D	C	G
CAT(14 Pin)	D	C	F	E
CAT(8 Pin)	H	B	C	D
Kubota	G	H	F	E
JCB	E	F	G	H
Volvo	E	F	G	H
New Holland	D	C	E	F
Case	D	C	E	F
Wacker	E	F	D	C
Takeuchi	E	F	D	C
Hyundai	E	F	D	C
Gehl	E	F	D	C
Mustang	E	F	D	C
Joystick Controller	E	F	D	C
ASV (14 PIN)	C	D	F	E
ASV (8 PIN)	G (red wire)	B (white wire)	C (green wire)	D (orange wire)



Ground Wire	High Flow Jumper
B	
A	
B	If (32gpm)XPS:(K) If (40gpm)XHP/XE:(N)
A	
B	
B	
B	
B	
B	
B	
B	
A	
A	

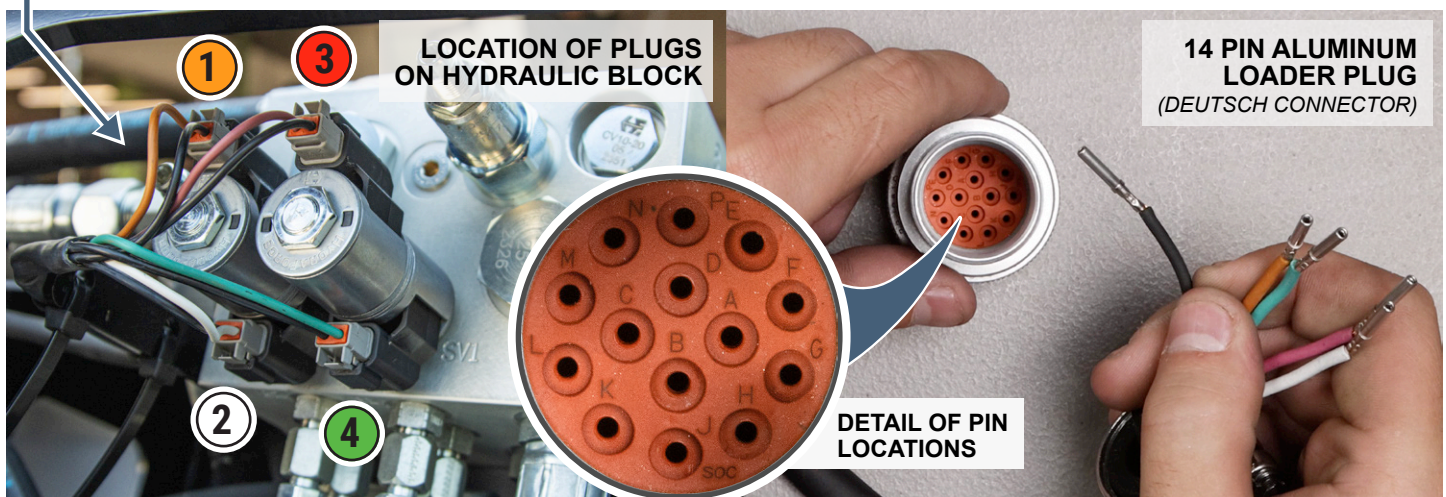


GLIDE PLATE: UHMW PLASTIC

▼ MODEL 26-84



PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

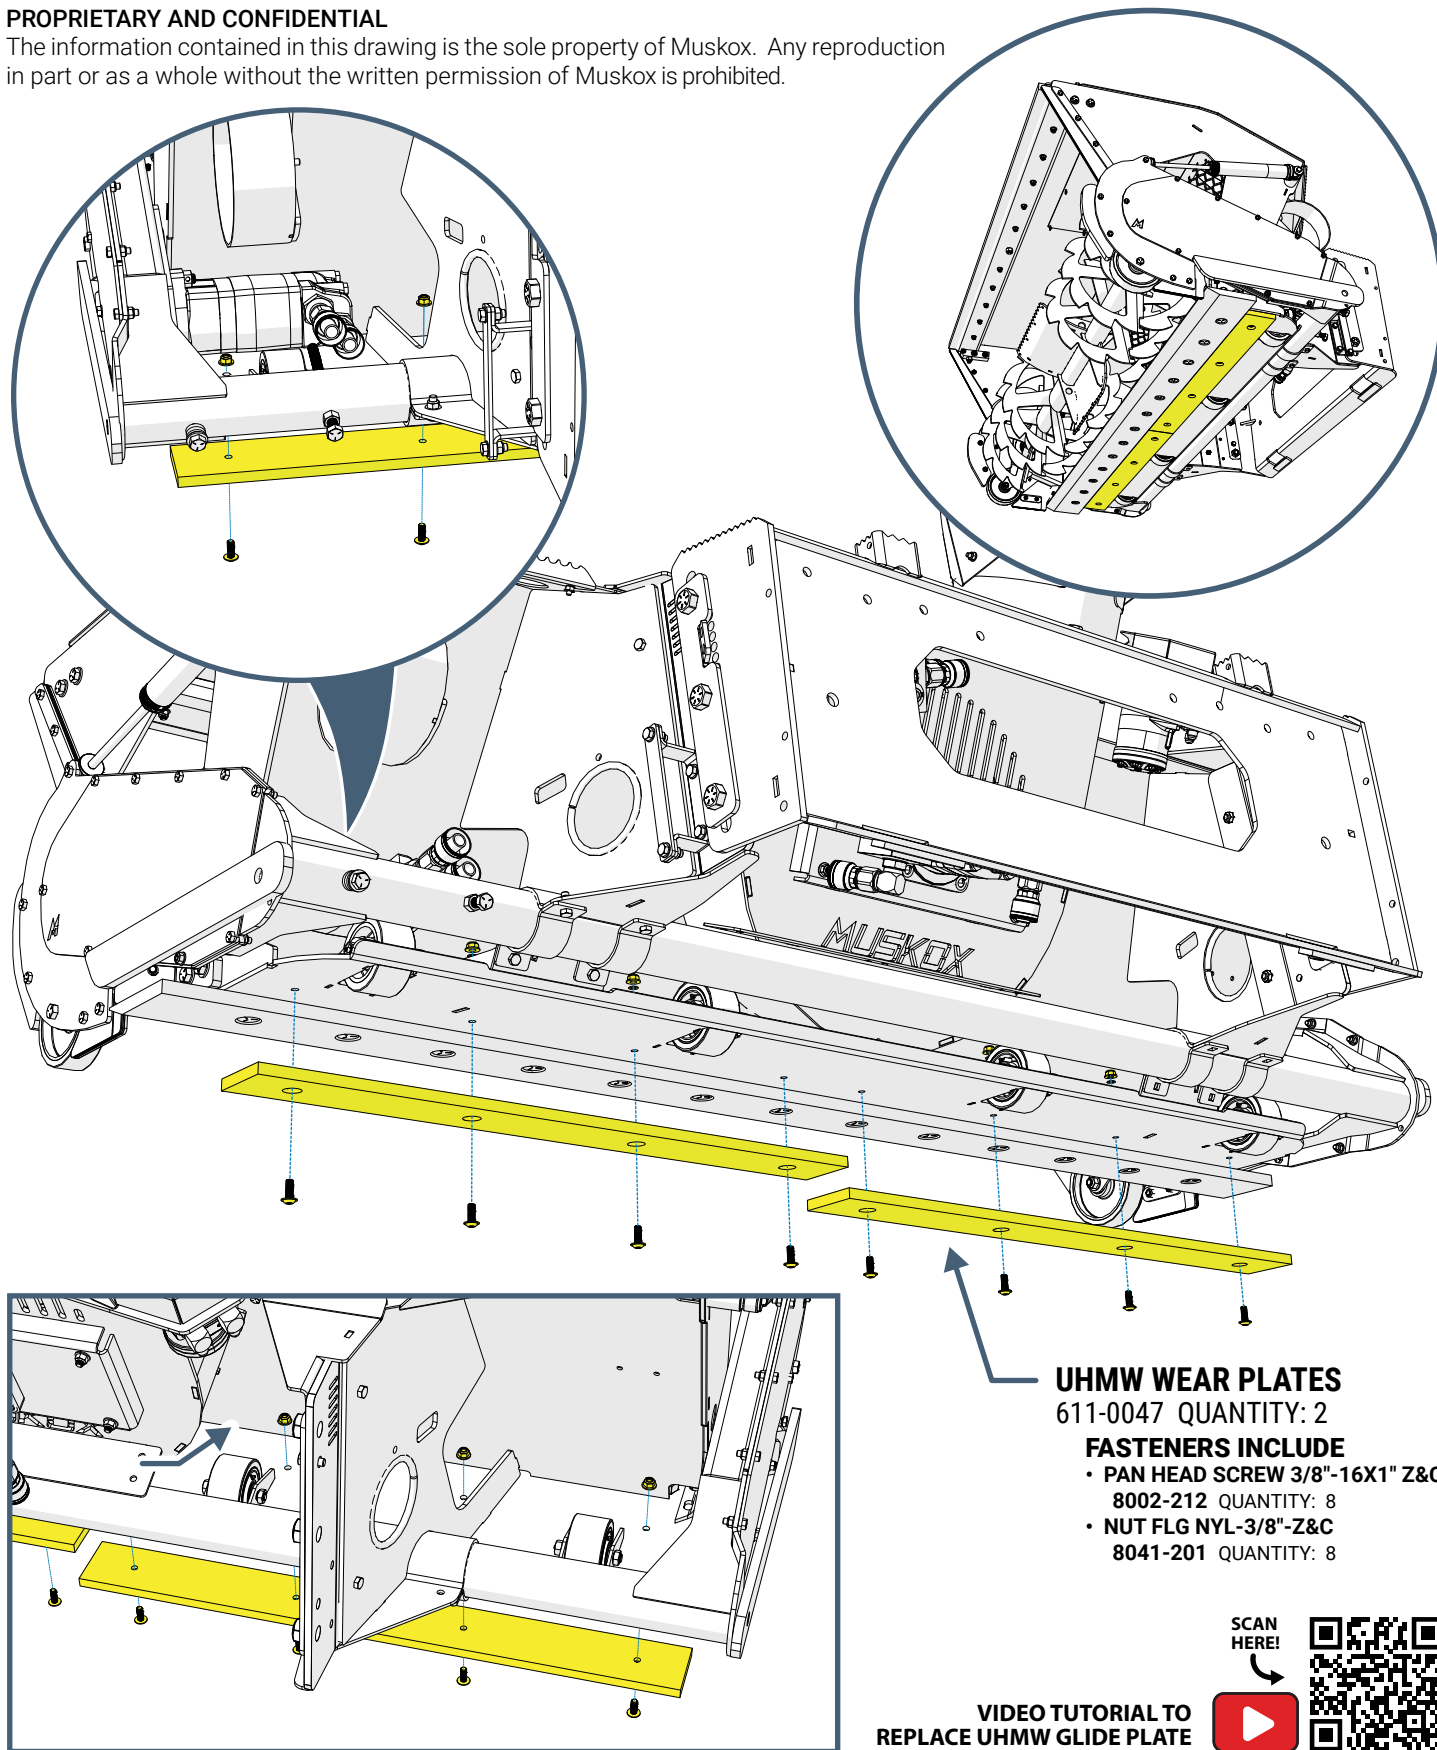

UHMW WEAR PLATES
611-0047 QUANTITY: 2

FASTENERS INCLUDE

- PAN HEAD SCREW 3/8"-16X1" Z&C
8002-212 QUANTITY: 8
- NUT FLG NYL-3/8"-Z&C
8041-201 QUANTITY: 8

SCAN
HERE!



VIDEO TUTORIAL TO
REPLACE UHMW GLIDE PLATE




GLIDE PLATE: UHMW WHEELS



▼ MODEL 26-84

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of MuskoX. Any reproduction in part or as a whole without the written permission of MuskoX is prohibited.

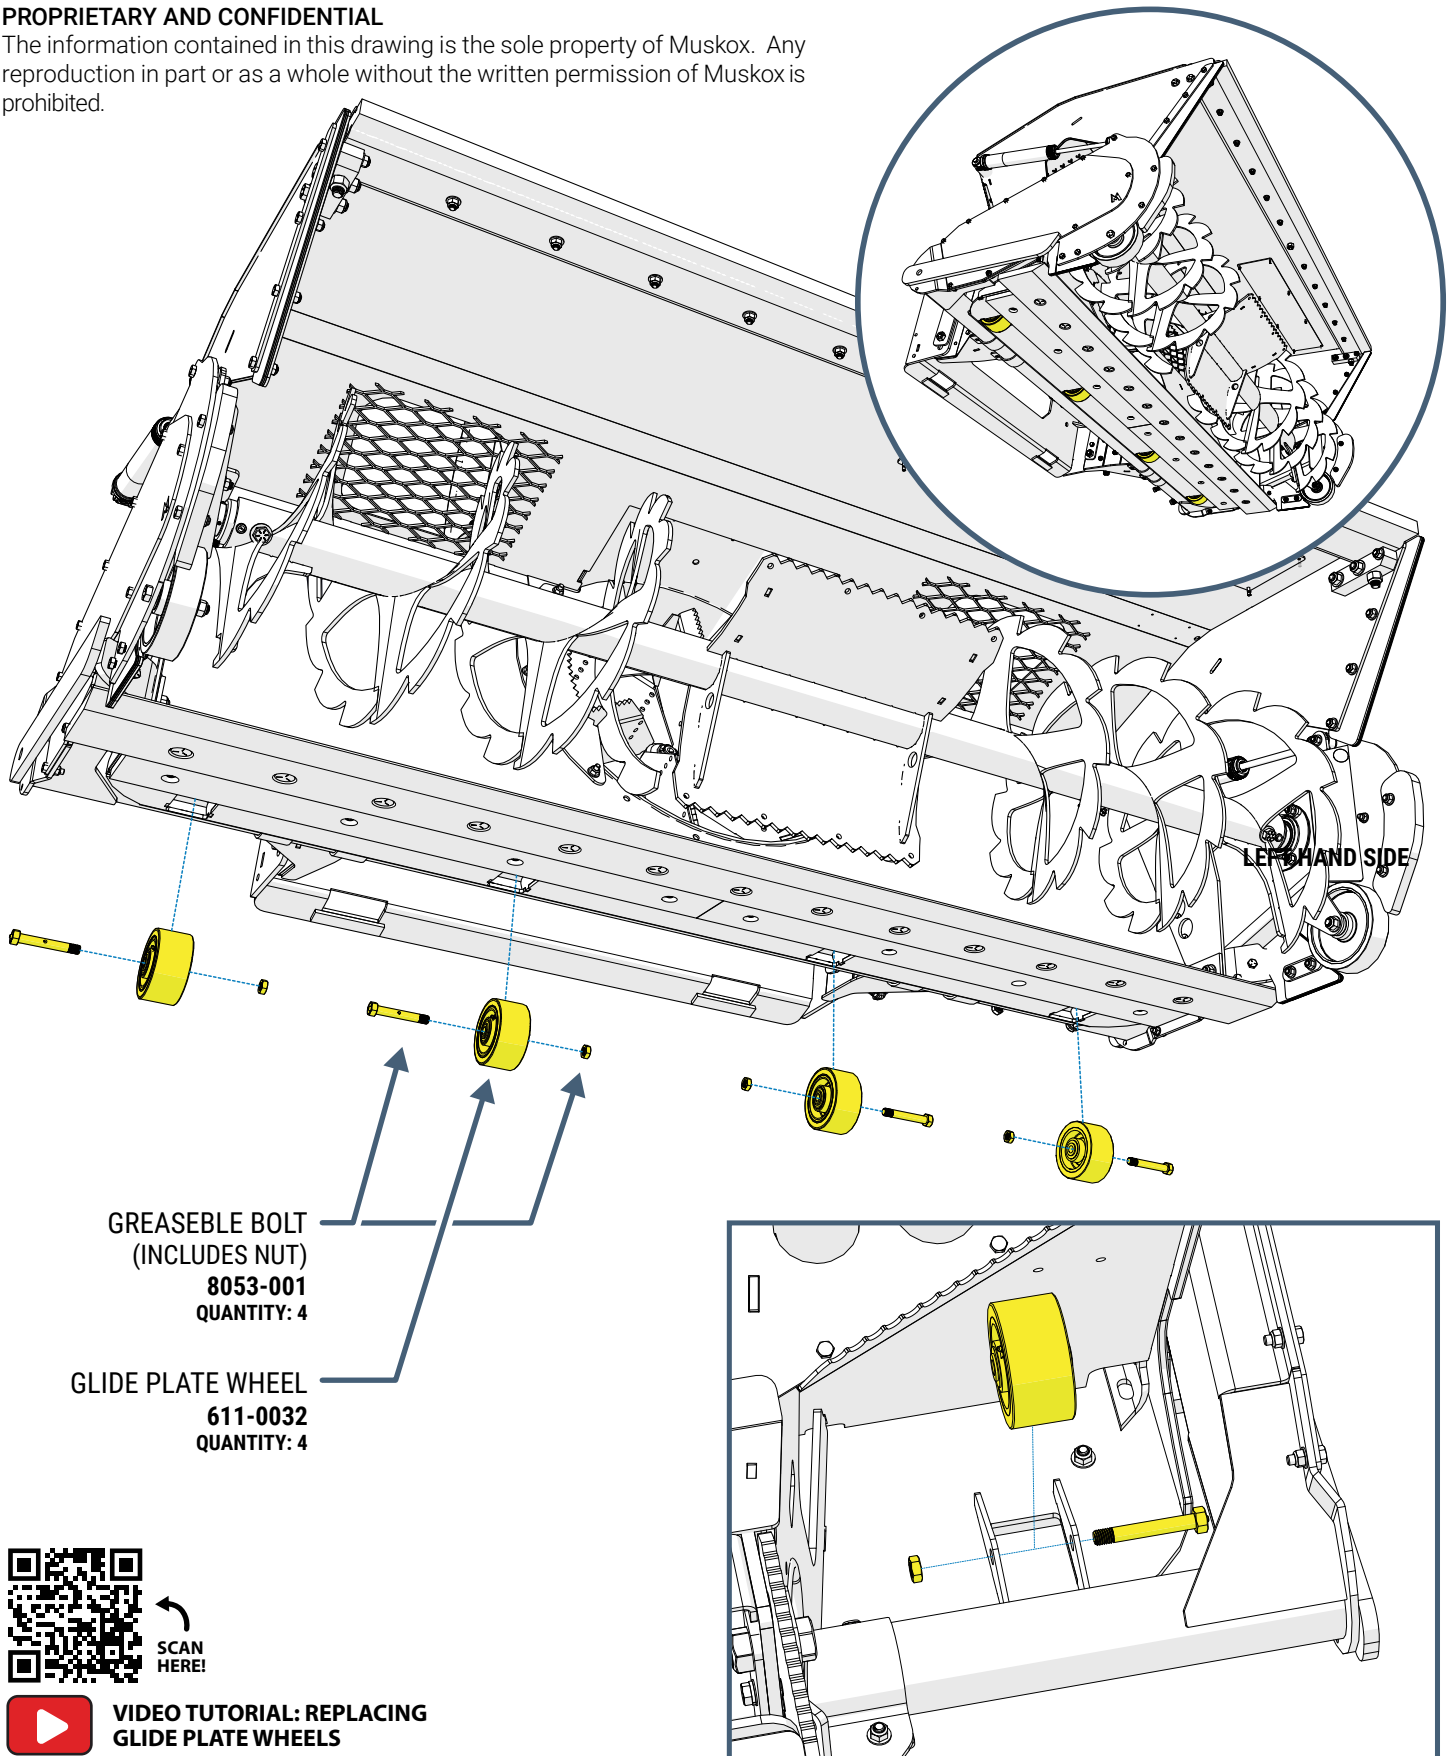

HYDRAULICS: CONTROL BLOCK ASSY

▼ MODEL 26-84



PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.


26-84, CONTROL BLOCK-VALVE/HOSE ASSY

700-0127

INCLUDES ALL OF THE FOLLOWING

- **BLOCK,CONTROL-2 VALVE**
0809-614 QUANTITY: 1
- **FITTING,6MJ-8MORB STRAIGHT**
0809-004 QUANTITY: 1
- **FITTING,12MJ-12MORB STRAIGHT**
0809-120 QUANTITY: 1
- **FITTING,12MJ-16MORB STRAIGHT**
0809-121 QUANTITY: 1
- **FITTING,12MJ-12MORB-90 DEG**
0809-717 QUANTITY: 2
- **FITTING,6MJ-6MORB STRAIGHT**
QUANTITY: 2
- **FITTING,6MJ-6MORB STRAIGHT-.031 ORIFICE**
0809-118 QUANTITY: 2
- **GEROLLER MOTOR FITTINGS**
700-1007 QUANTITY: 1
 - **FITTING,12MJ-12MORB STRAIGHT**
0809-120 QUANTITY: 1
 - **FITTING,12MJ-12MORB-90 DEG**
0809-717 QUANTITY: 1
 - **FITTING,6MJ-4MORB-90 DEG**
0809-715 QUANTITY: 1

- **ALSO INCLUDES ALL PARTS LISTED BELOW**

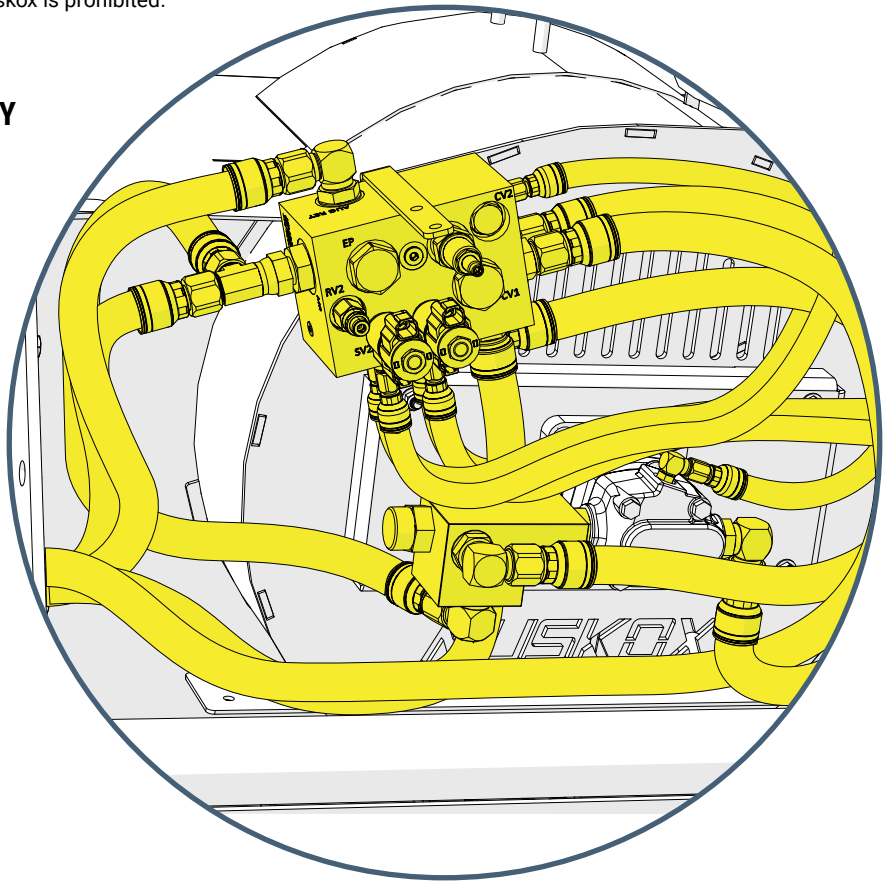

INDIVIDUAL PARTS AVAILABLE

LOADER HOSES

- FOR STANDARD LOADERS
SEE PAGE 26
- FOR BOBCAT LOADERS
SEE PAGE 27
- FOR RIGHT SIDE/SINGLE ARM LOADERS
SEE PAGE 28

• AUGER FLOW CONTROL, BLOCK-VALVE/HOSE ASSY (SEE PAGE 20)

1809-037 QUANTITY: 2
INCLUDES: HOSE,FAN-34"-ASSY QUANTITY: 1

DEFLECTOR HOSES (SEE PAGE 22)

- **HOSE,DEFLECTOR-53"-ASSY**
1809-026 QUANTITY: 1
- **HOSE,DEFLECTOR-59"-ASSY**
1809-027 QUANTITY: 1
- **SLEEVE,HOSE-CTL-1 1/4"X48"**
0809-017 QUANTITY: 1

ROTATE MOTOR HOSES (SEE PAGE 23)



- **HOSE,ROTATE-31"-ASSY**
1809-025 QUANTITY: 2

IMPELLER MOTOR HOSES (SEE PAGE 24)

- **HOSE,FAN-34"-ASSY**
1809-021 QUANTITY: 1
- **HOSE,CASE DRAIN-25"-ASSY**
1809-028 QUANTITY: 1

AUGER MOTOR HOSES (SEE PAGE 21)

- **HOSE,AUGER-60"-ASSY**
1809-035 QUANTITY: 1
- **HOSE,AUGER-29"-ASSY**
1809-036 QUANTITY: 1
- **HOSE,SUPPORT-STRAP**
700-0161 QUANTITY: 1

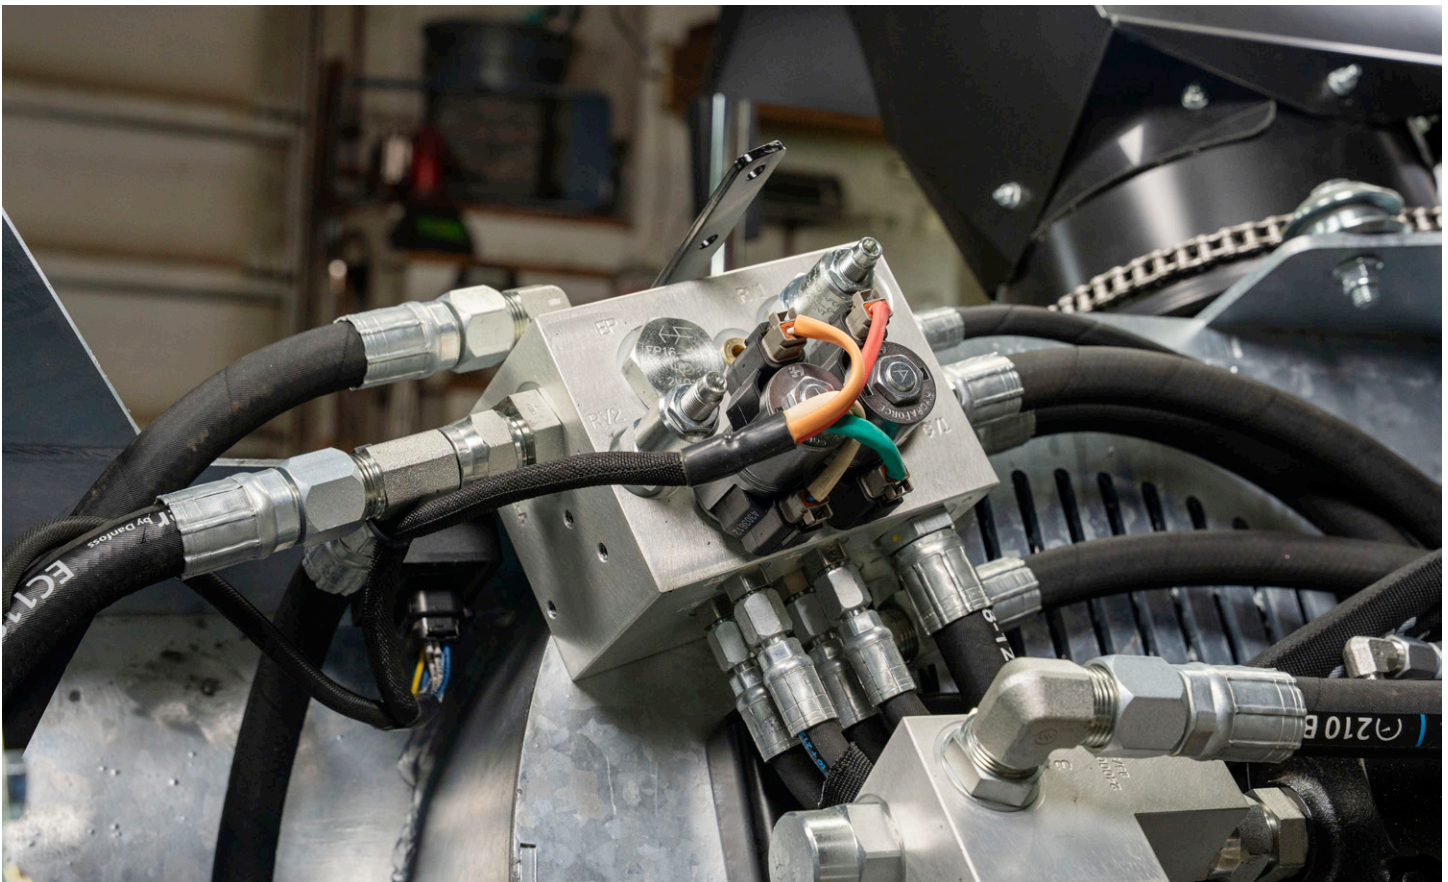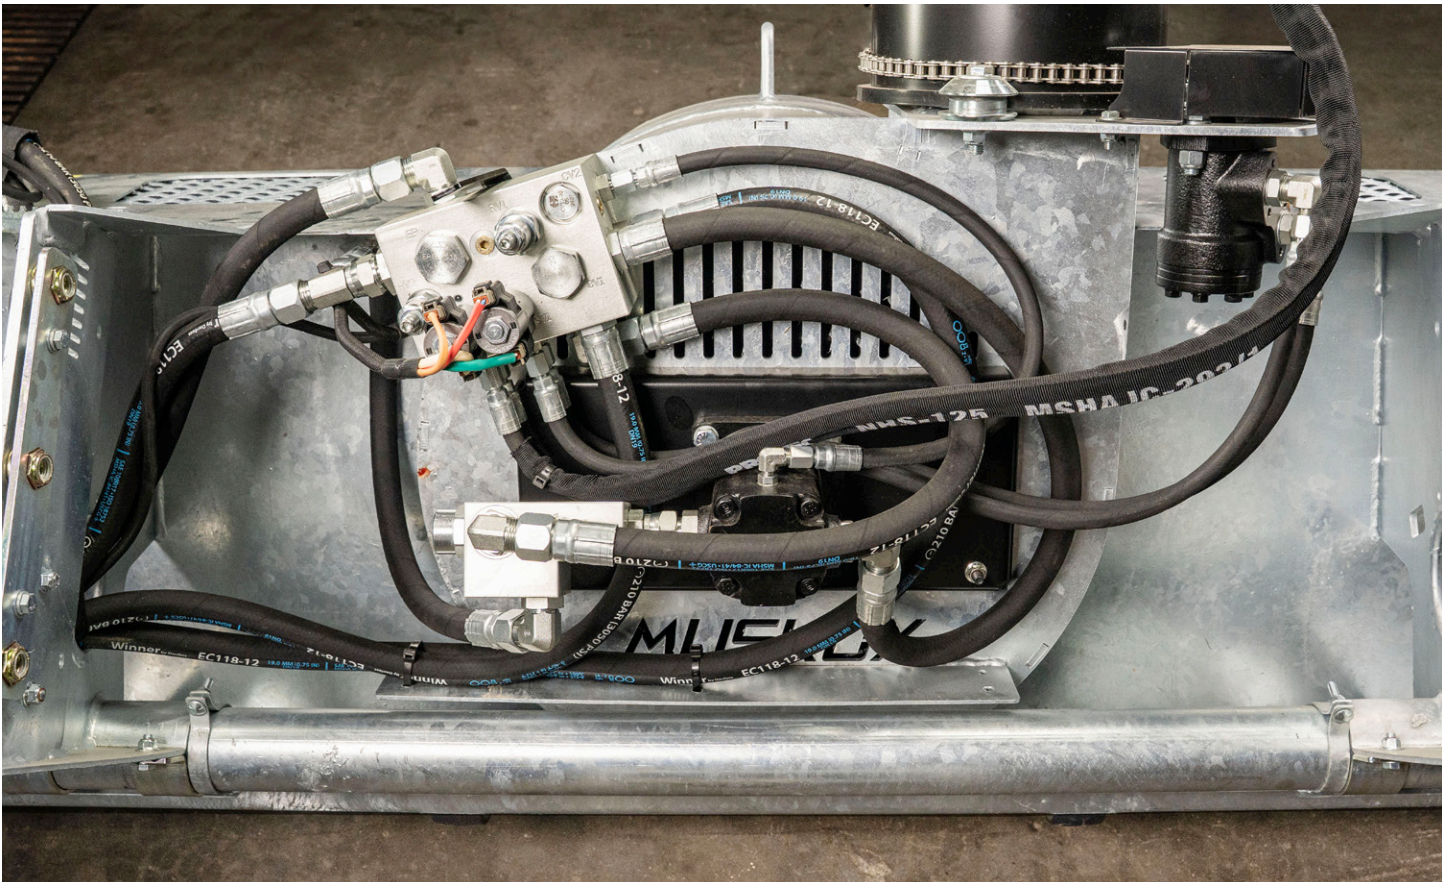


HYDRAULICS: AUGER FLOW CONTROL BLOCK

▼ MODEL 26-84



PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

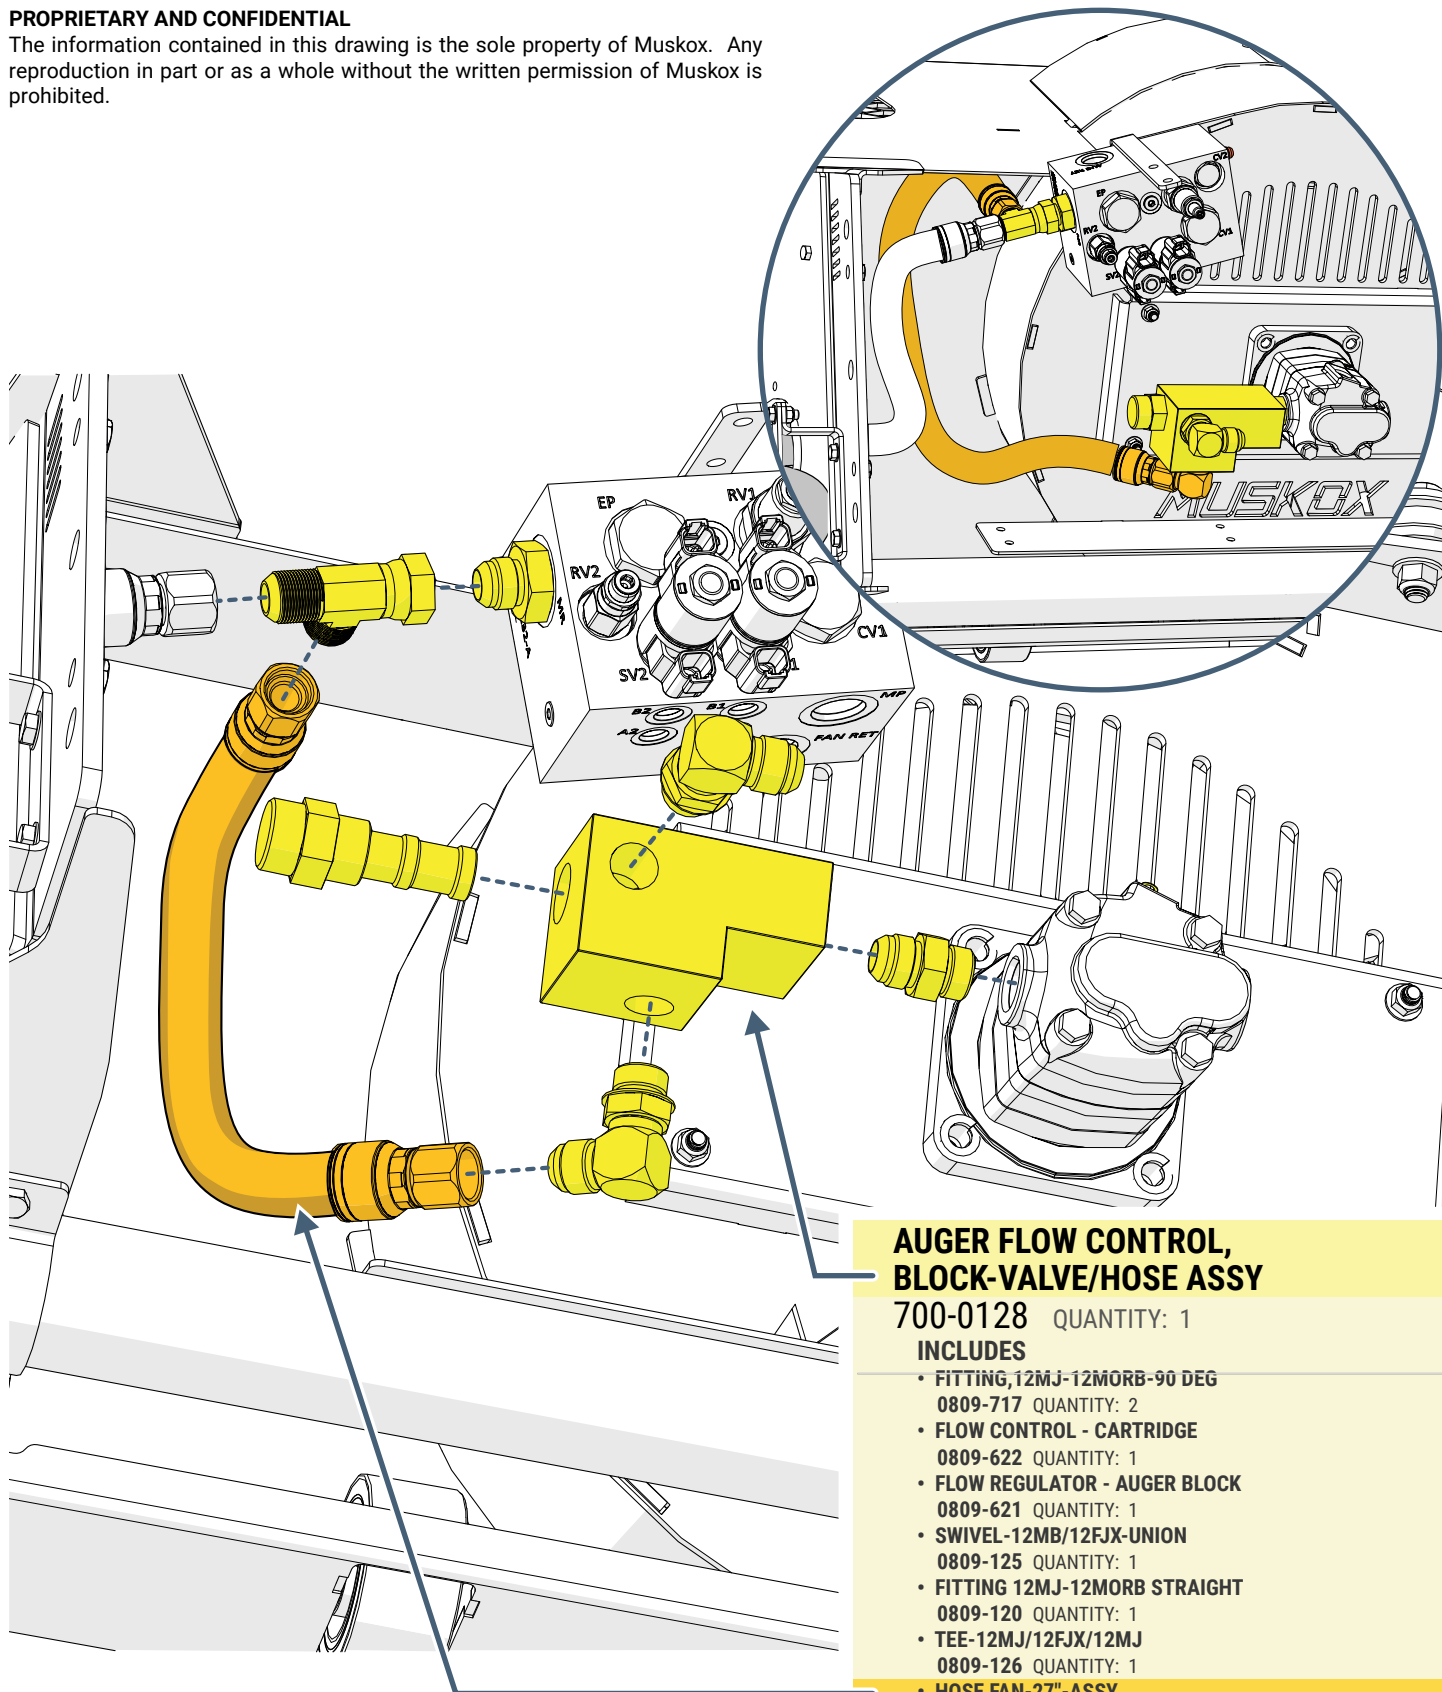

AUGER FLOW CONTROL, BLOCK-VALVE/HOSE ASSY

700-0128 QUANTITY: 1

INCLUDES

- FITTING, 12MJ-12MORB-90 DEG
0809-717 QUANTITY: 2
- FLOW CONTROL - CARTRIDGE
0809-622 QUANTITY: 1
- FLOW REGULATOR - AUGER BLOCK
0809-621 QUANTITY: 1
- SWIVEL-12MB/12FJX-UNION
0809-125 QUANTITY: 1
- FITTING 12MJ-12MORB STRAIGHT
0809-120 QUANTITY: 1
- TEE-12MJ/12FJX/12MJ
0809-126 QUANTITY: 1
- HOSE, FAN-27"-ASSY
1809-037 QUANTITY: 1


HYDRAULICS: AUGER HOSES

M

▼ **MODEL 26-84**


PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

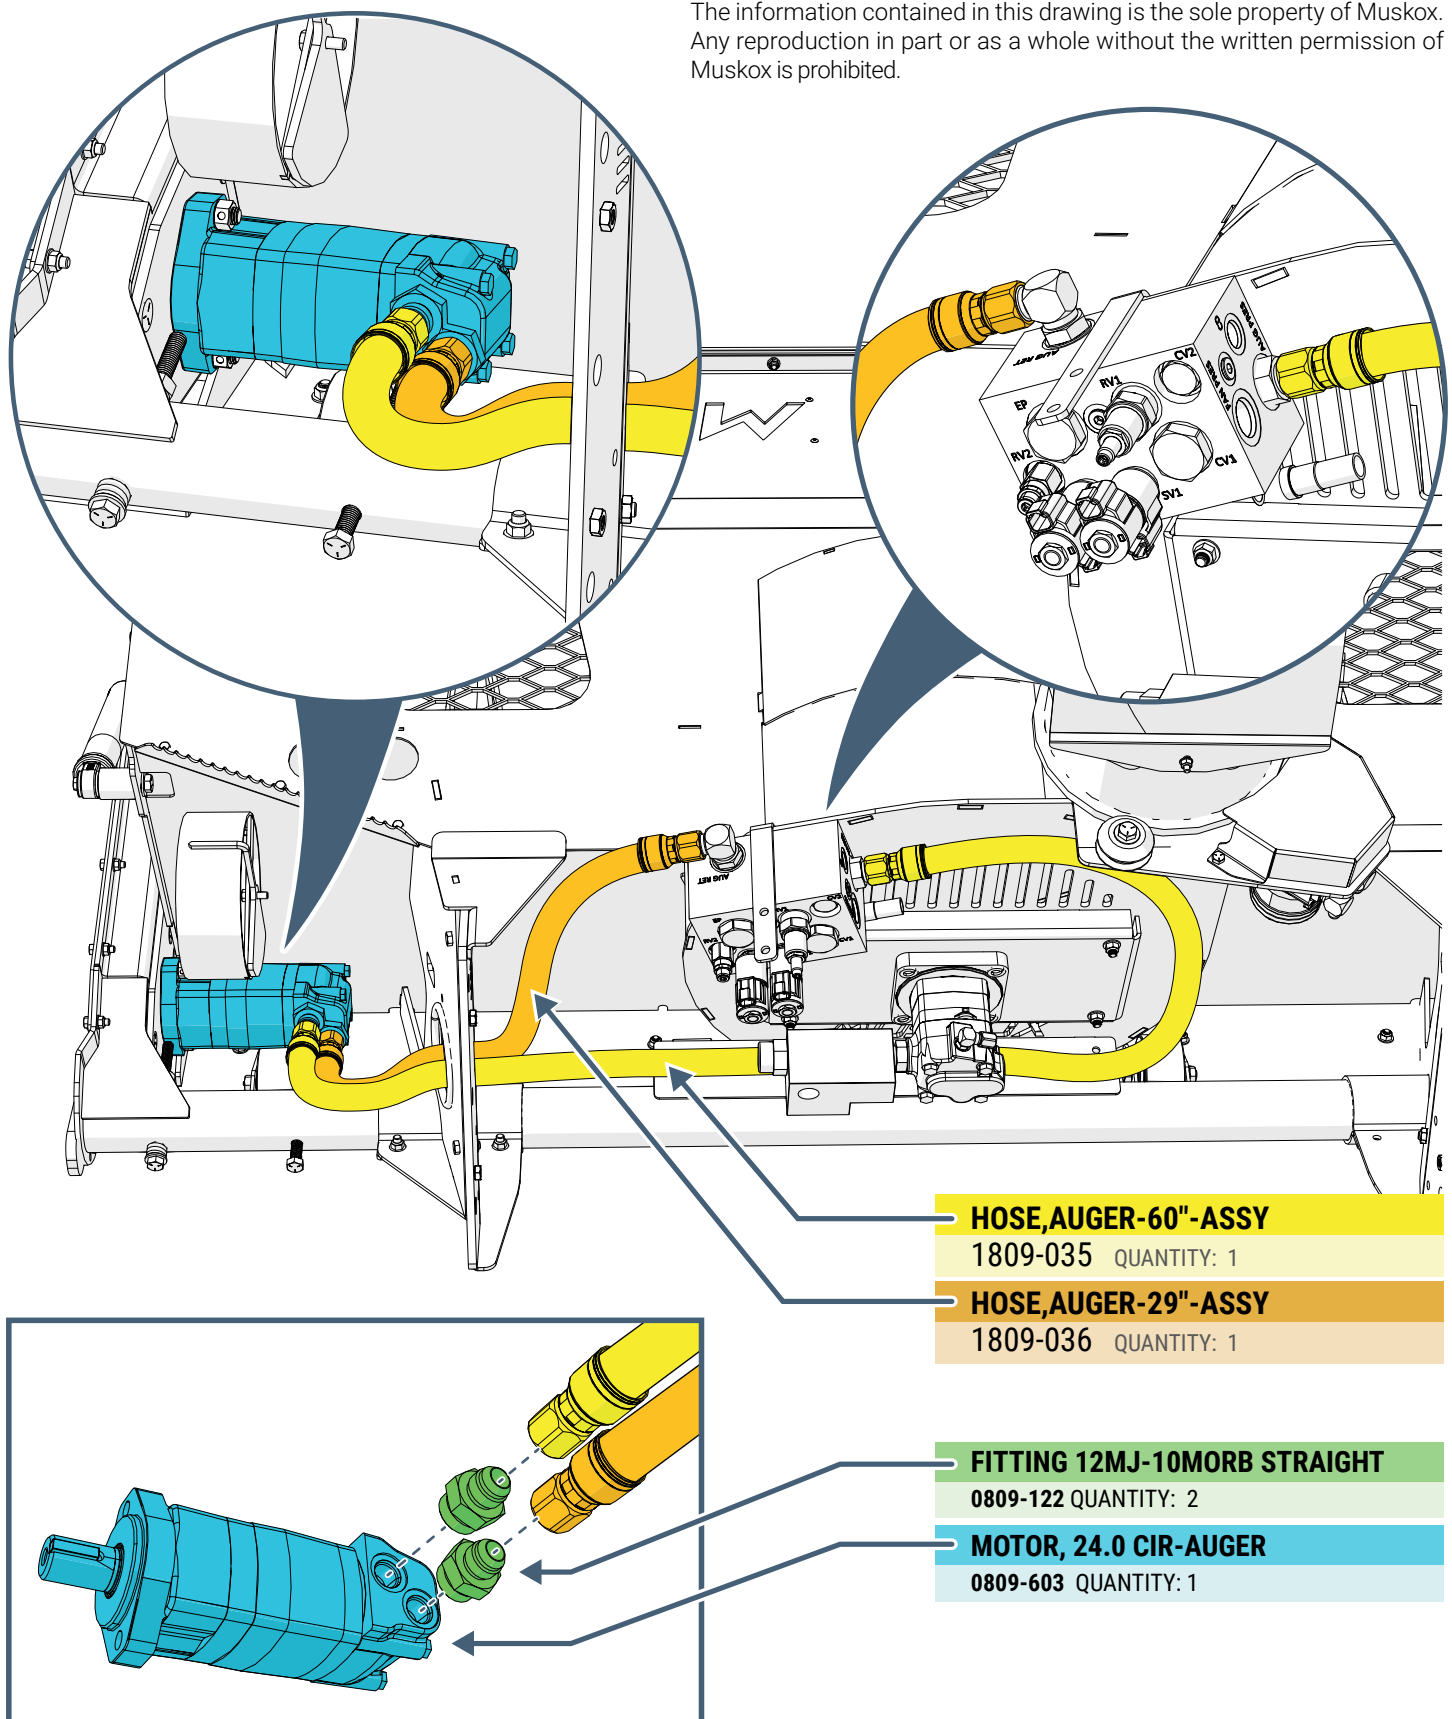

HYDRAULICS: CHUTE DEFLECTION HOSES

▼ MODEL 26-84

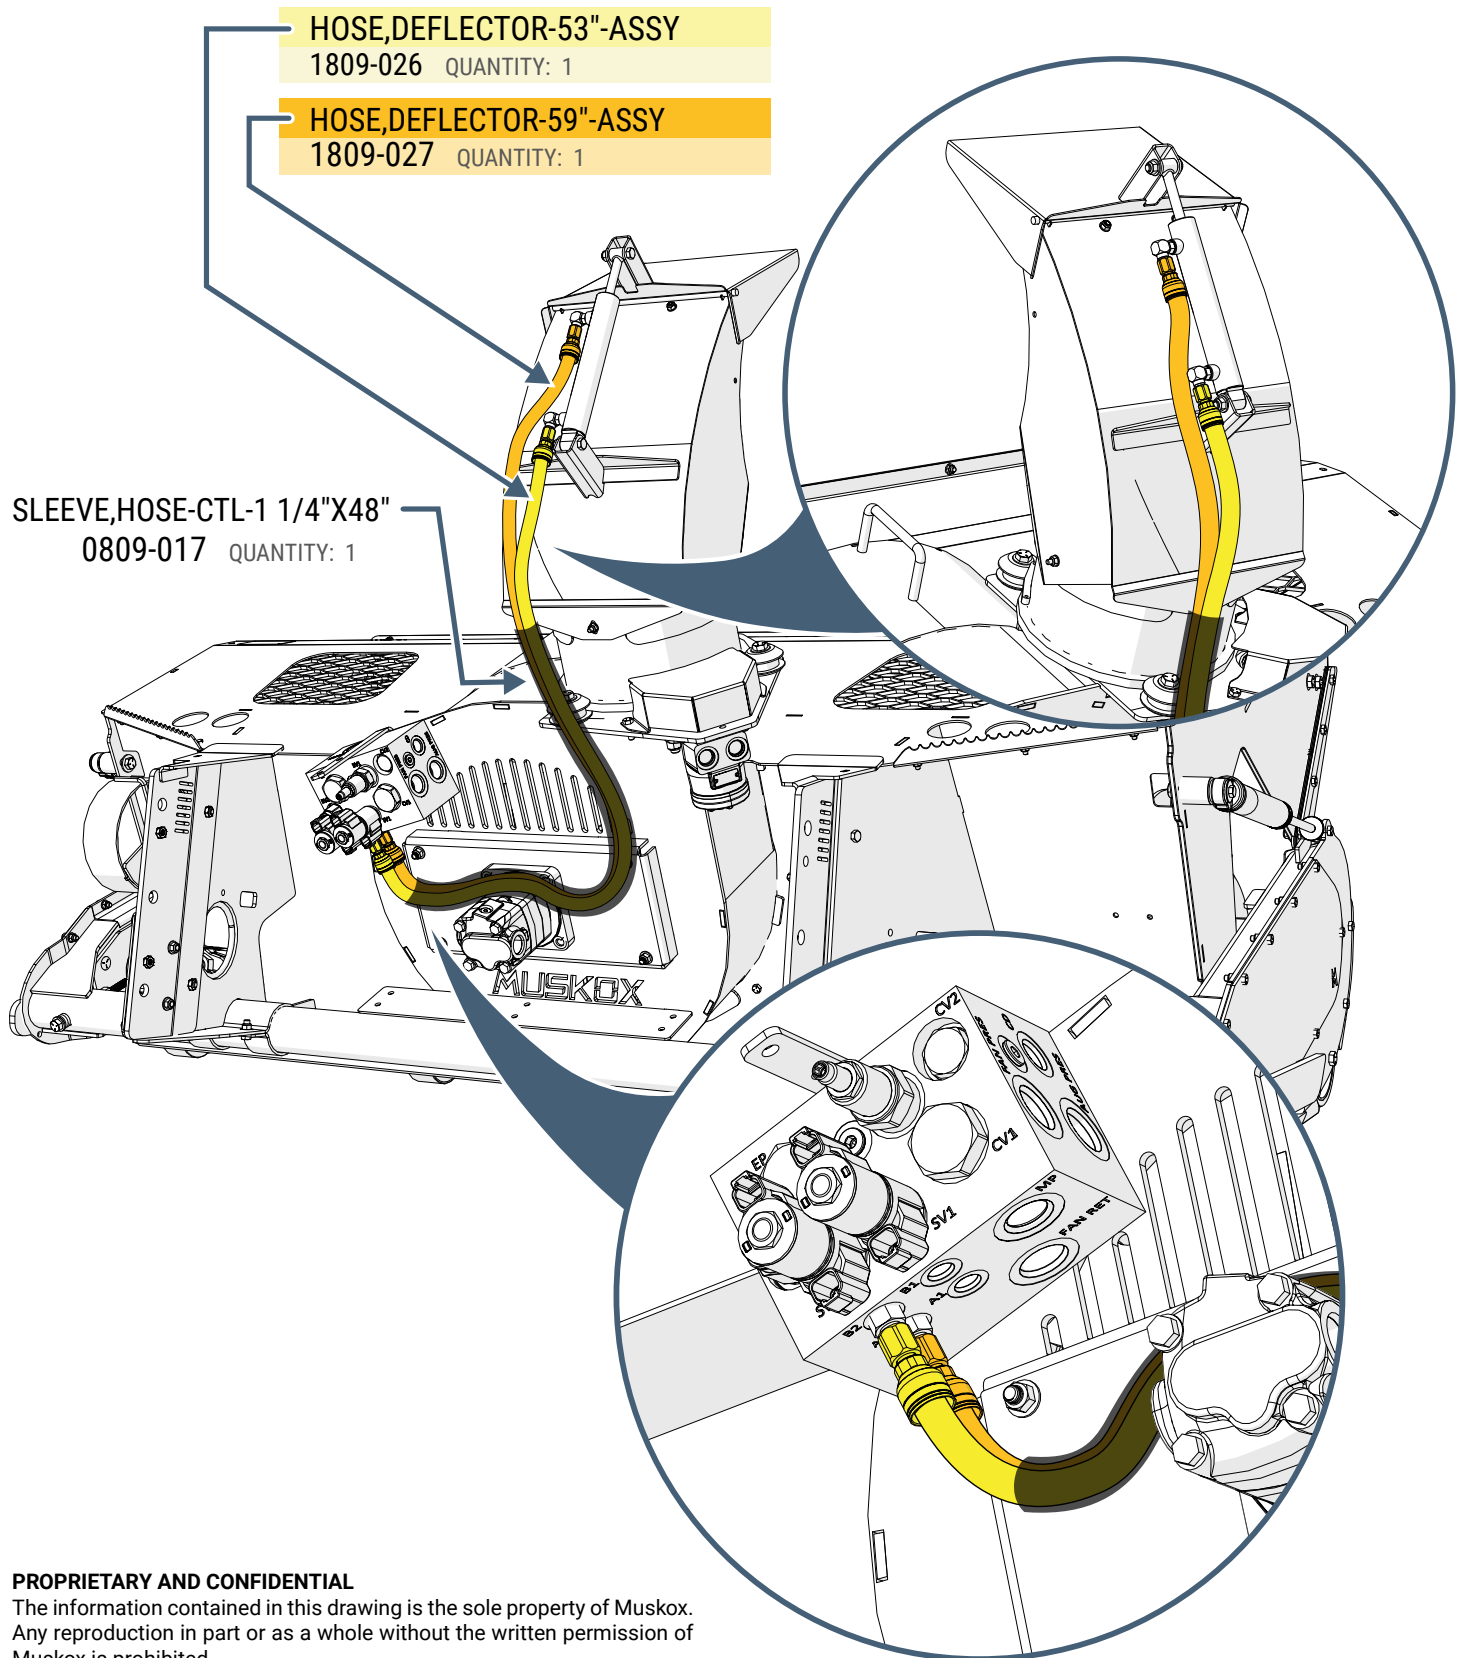

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.


HYDRAULICS: CHUTE ROTATE HOSES



▼ MODEL 26-84

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of MuskoX.
Any reproduction in part or as a whole without the written permission of
MuskoX is prohibited.

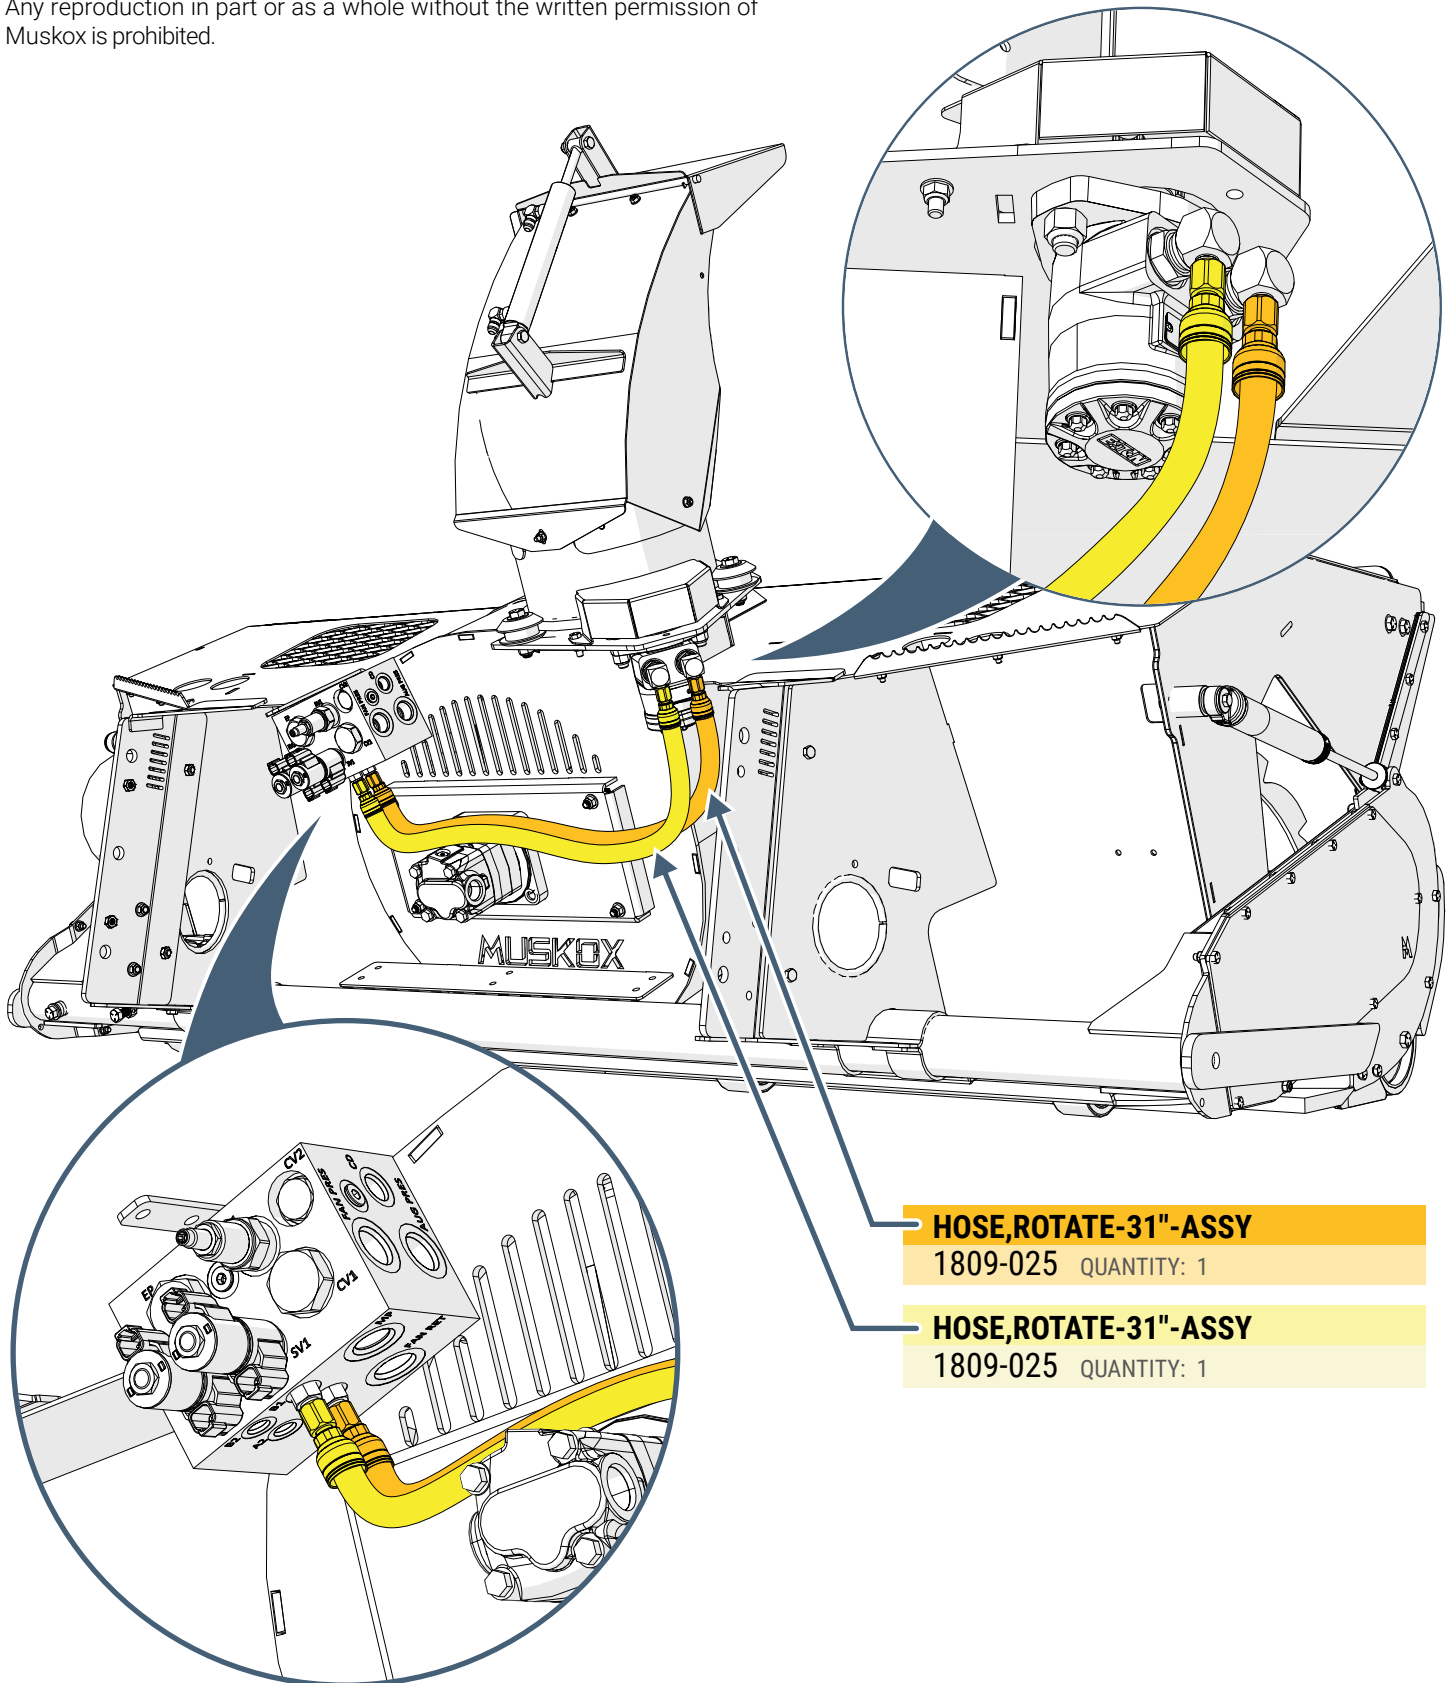

HOSE, ROTATE-31"-ASSY

1809-025 QUANTITY: 1

HOSE, ROTATE-31"-ASSY

1809-025 QUANTITY: 1


HYDRAULICS: IMPELLER HOSES

▼ MODEL 26-84

M

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox.
Any reproduction in part or as a whole without the written permission of
Muskox is prohibited.

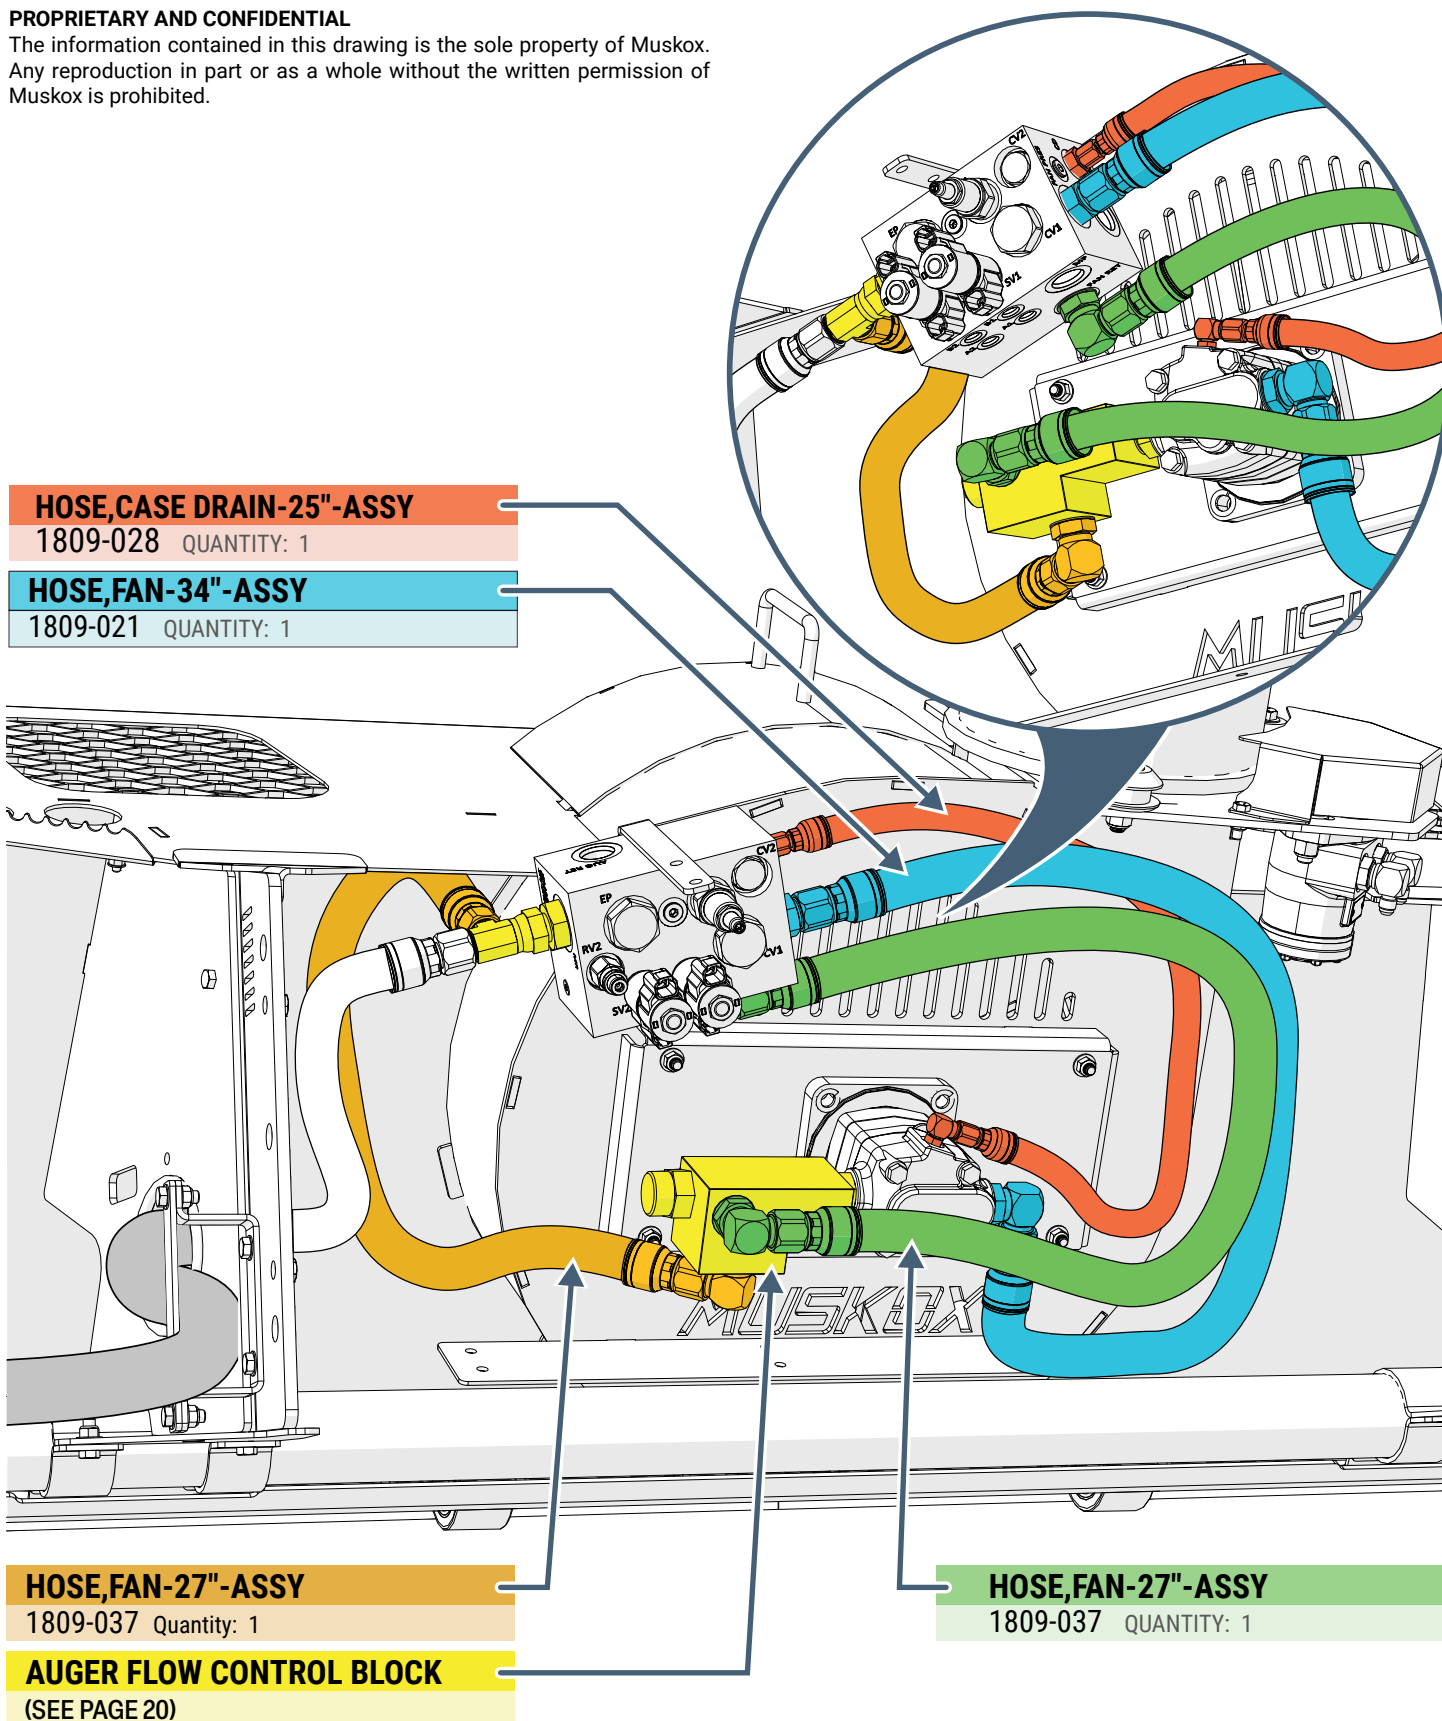


HYDRAULICS: IMPELLER MOTOR

M

▼ MODEL 26-84

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

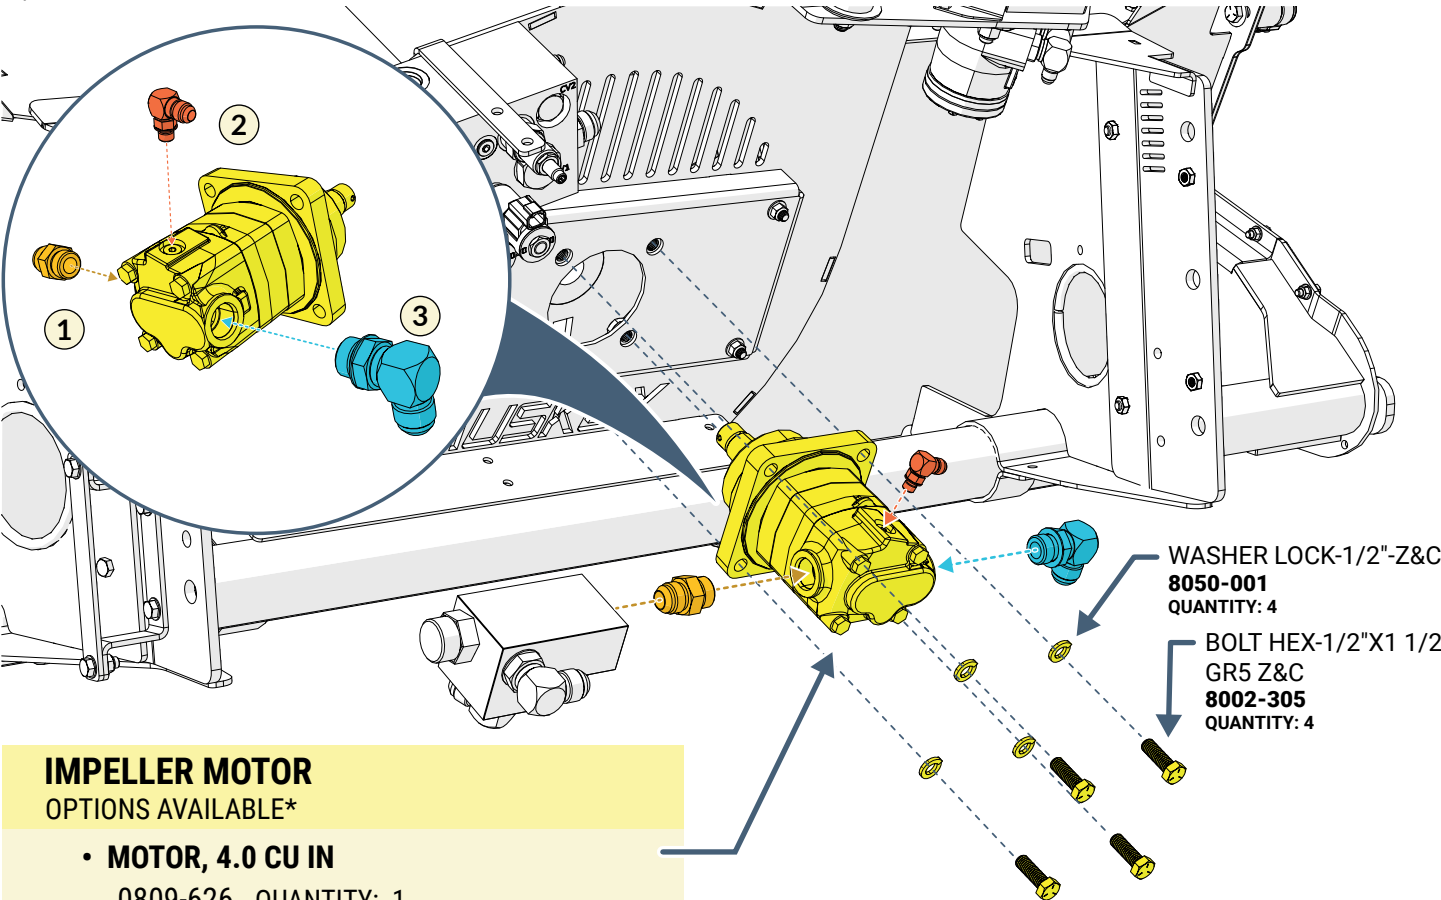

IMPELLER MOTOR

OPTIONS AVAILABLE*

- **MOTOR, 4.0 CU IN**
0809-626 QUANTITY: 1
- **MOTOR, 4.9 CU IN**
0809-610 QUANTITY: 1
- **MOTOR, 6.2 CU IN**
0809- QUANTITY: 1
- **MOTOR, 8.0 CU IN**
0809-606 QUANTITY: 1
- **MOTOR, 9.6 CU IN**
0809-611 QUANTITY: 1
- **MOTOR, 11.9 CU IN**
0809-616 QUANTITY: 1
- **MOTOR, 14.9 CU IN**
0809-617 QUANTITY: 1

FITTINGS

- 1

- **FITTING,12MJ-12MORB-STRAIGHT**
QUANTITY: 1
- 2

- **FITTING,6MJ-4MORB-90 DEG**
QUANTITY: 1
- 3

- **FITTING,12MJ-12MORB-90 DEG**
QUANTITY: 1

MOTOR SIZE: GENERAL GUIDLINES	
HYDRAULIC MOTOR SIZE	GALLONS PER MINUTE
4.0 CU IN.*	12.5-14 GPM
4.9 CU IN.	15-18 GPM
6.2 CU IN. - 8.0 CU IN.	19-26.9 GPM
8.0 CU IN. - 9.6 CU IN.	27-32.9 GPM
9.6 CU IN. - 11.9 CU IN.	33-39.9 GPM
11.9 CU IN. - 14.9 CU IN.	40-45 GPM



* CONTACT MUSKOX FOR IMPELLER MOTOR SPECIFIC TO YOUR UNIT




SCAN
HERE!



VIDEO TUTORIAL: REPLACING
IMPELLER MOTOR

LOADER HOSES: STANDARD


▼ MODEL 26-84

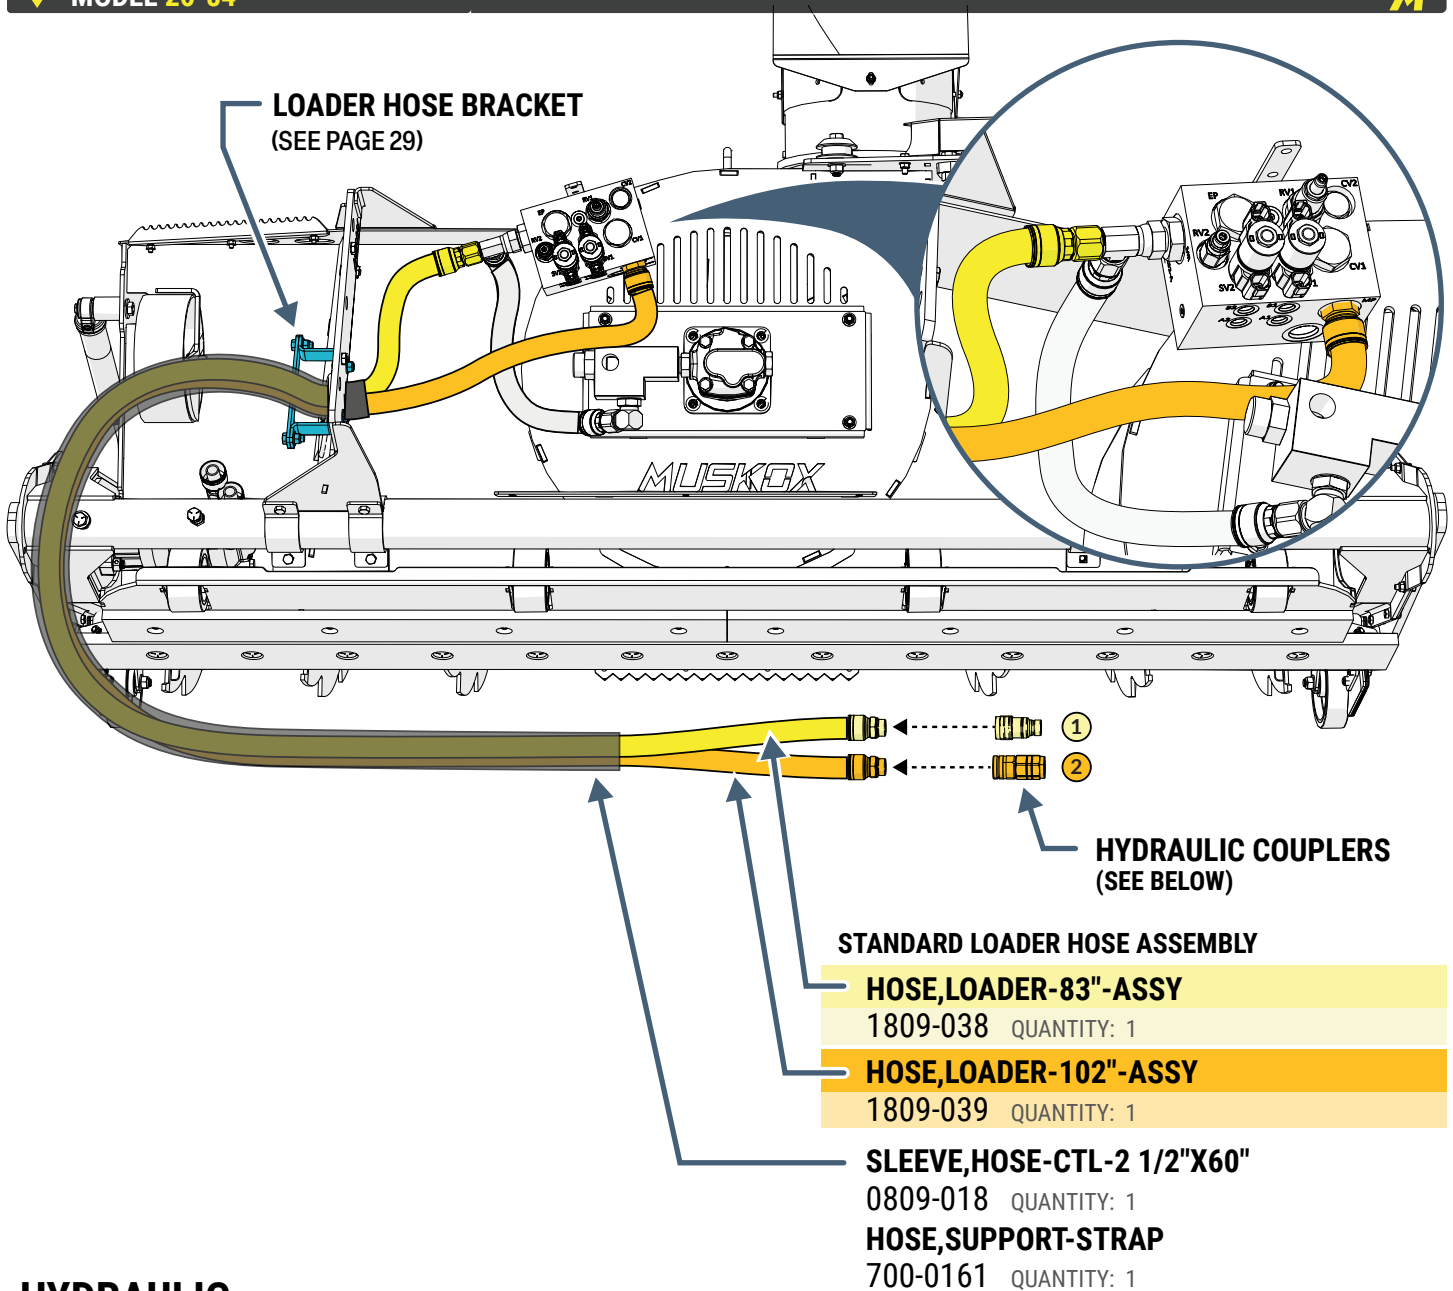


HYDRAULIC COUPLERS

SIZES AVAILABLE

(MATCH SIZE TO THE HYDRAULIC PORTS ON YOUR LOADER)



- **SIZE 12, COUPLER, QUICK-MALE 1/2\"-12 ORB**
0809-721 QUANTITY: 1
- **SIZE 16, COUPLER, QUICK-MALE 5/8\"-12 ORB**
0809-727 QUANTITY: 1
- **SIZE 19, COUPLER, QUICK-MALE 3/4\"-12 ORB**
0809-729 QUANTITY: 1



- **SIZE 12, COUPLER, QUICK-FEMALE 1/2\"-12 ORB**
0809-720 QUANTITY: 1
- **SIZE 16, COUPLER, QUICK-FEMALE 5/8\"-12 ORB**
0809-726 QUANTITY: 1
- **SIZE 19, COUPLER, QUICK-FEMALE 3/4\"-12 ORB**
0809-728 QUANTITY: 1


PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

LOADER HOSES: **BOBCAT**

M

▼ **MODEL 26-84**

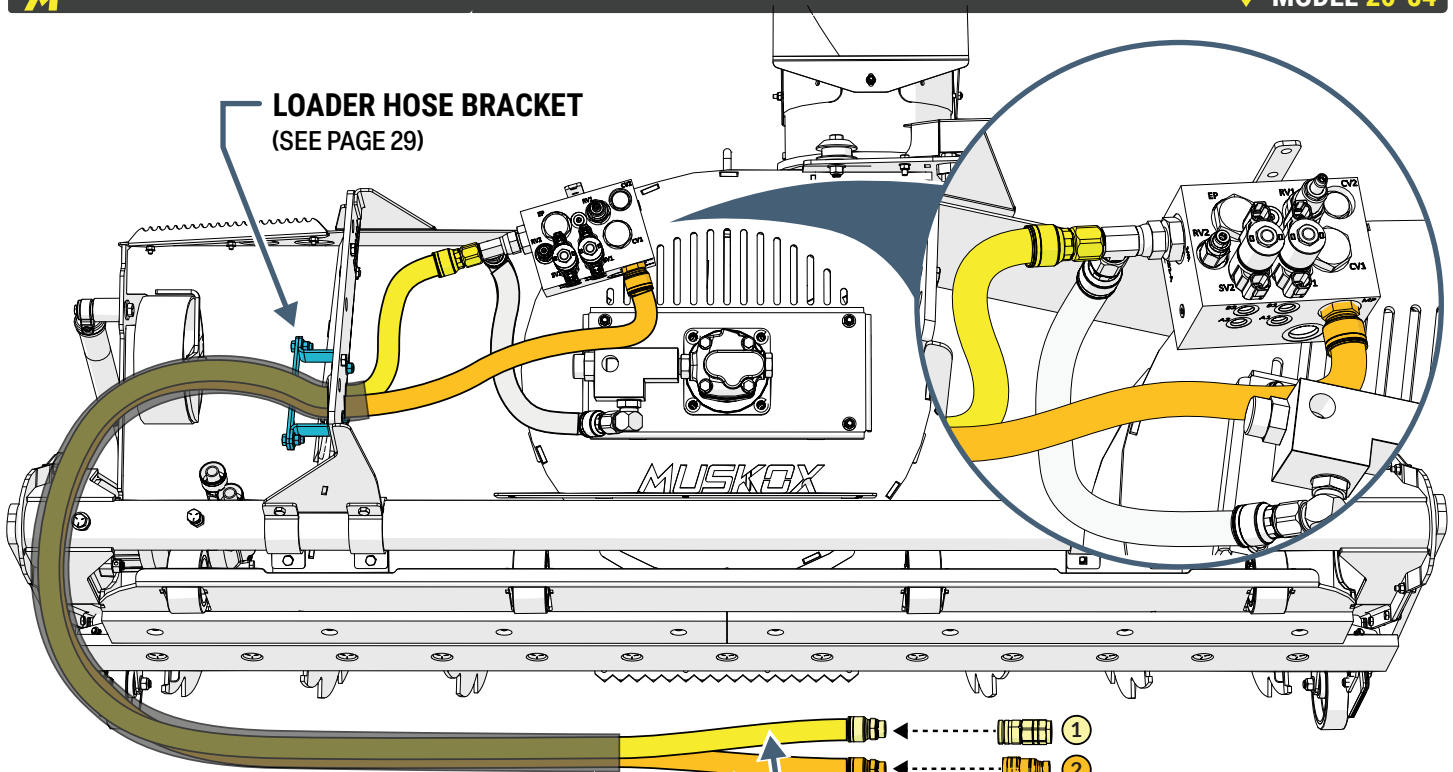

LOADER HOSE BRACKET
(SEE PAGE 29)

HYDRAULIC COUPLERS
(SEE BELOW)

BOBCAT LOADER HOSE ASSEMBLY

HOSE,LOADER-83"-ASSY

1809-038 QUANTITY: 1

HOSE,LOADER-102"-ASSY

1809-039 QUANTITY: 1

SLEEVE,HOSE-CTL-2 1/2"X60"

0809-018 QUANTITY: 1

HOSE,SUPPORT-STRAP

700-0161 QUANTITY: 1




NOTE:

BOBCAT HYDRAULIC COUPLERS
ARE SET UP DIFFERENTLY FROM
OTHER BRAND LOADERS


HYDRAULIC COUPLERS

SIZES AVAILABLE

(MATCH SIZE TO THE HYDRAULIC PORTS ON YOUR LOADER)



- **SIZE 12, COUPLER, QUICK-MALE 1/2"-12 ORB**
0809-721 QUANTITY: 1
- **SIZE 16, COUPLER, QUICK-MALE 5/8"-12 ORB**
0809-727 QUANTITY: 1
- **SIZE 19, COUPLER, QUICK-MALE 3/4"-12 ORB**
0809-729 QUANTITY: 1



- **SIZE 12, COUPLER, QUICK-FEMALE 1/2"-12 ORB**
0809-720 QUANTITY: 1
- **SIZE 16, COUPLER, QUICK-FEMALE 5/8"-12 ORB**
0809-726 QUANTITY: 1
- **SIZE 19, COUPLER, QUICK-FEMALE 3/4"-12 ORB**
0809-728 QUANTITY: 1


PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing
is the sole property of Muskox. Any repro-
duction in part or as a whole without the
written permission of Muskox is prohibited.

LOADER HOSES: SINGLE ARM LOADERS

▼ MODEL 26-84


M

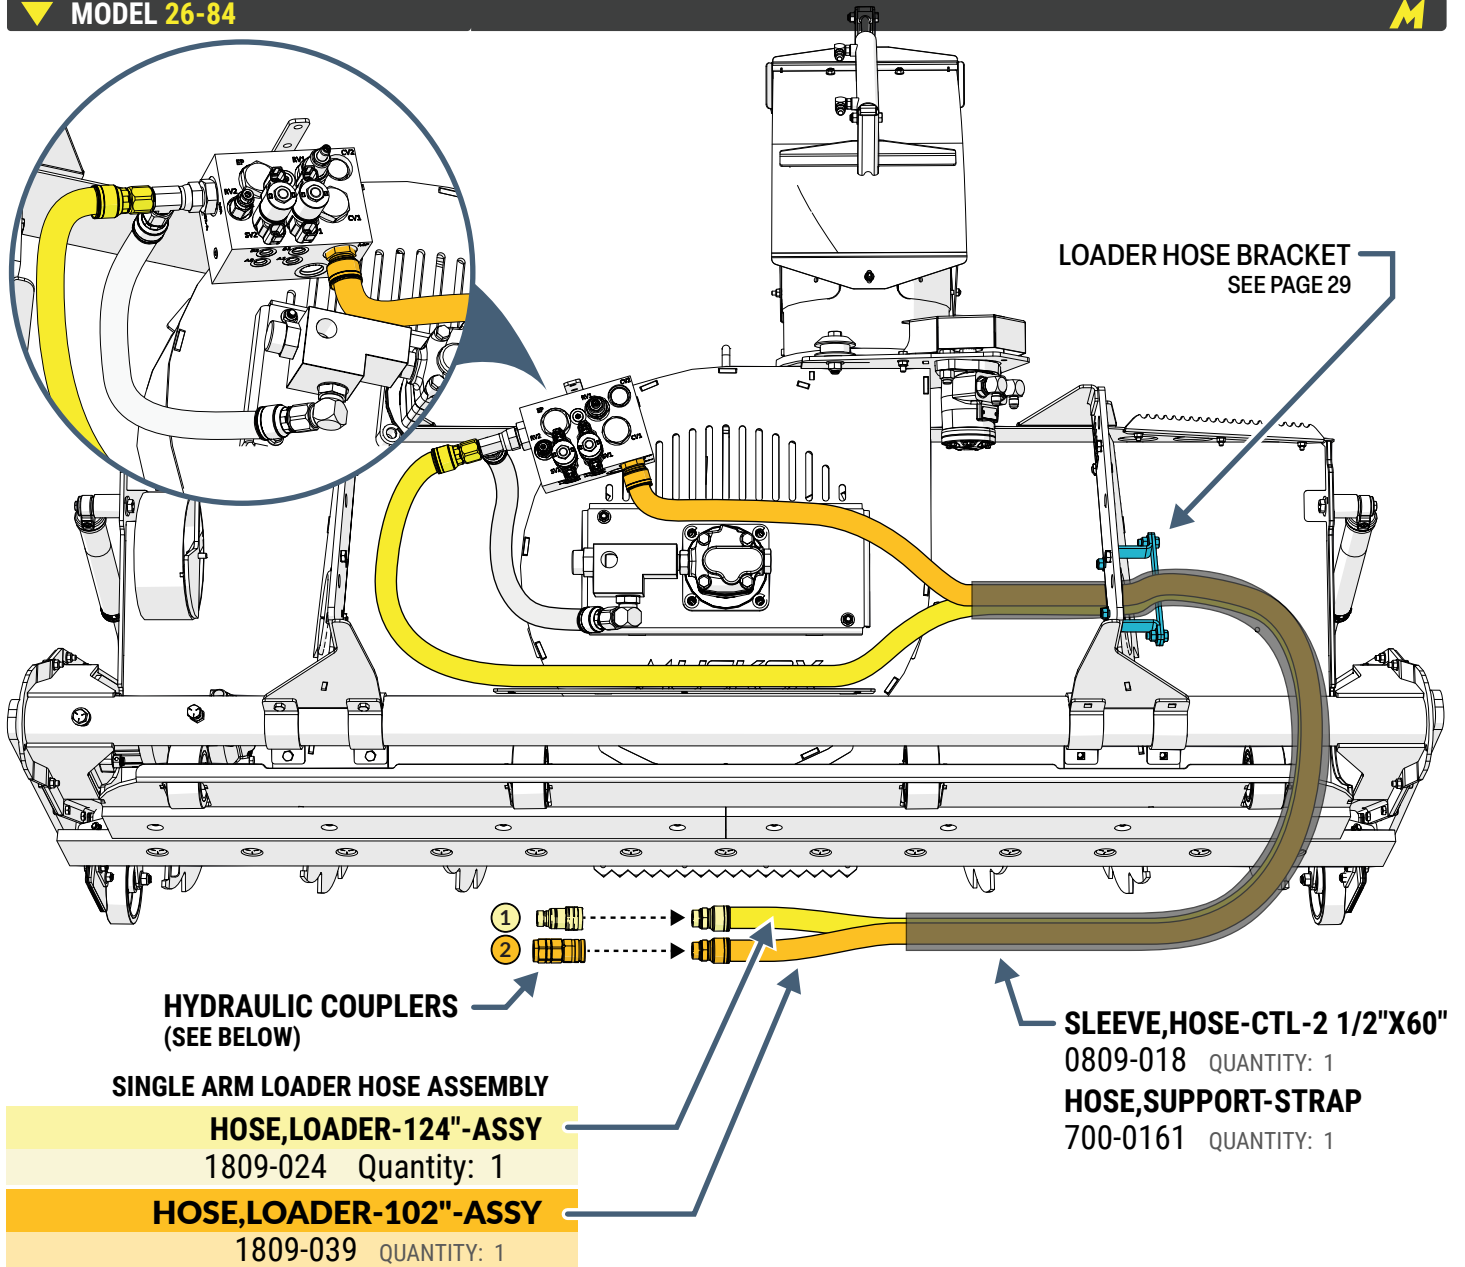


HYDRAULIC COUPLERS

SIZES AVAILABLE

(MATCH SIZE TO THE HYDRAULIC PORTS ON YOUR LOADER)



- **SIZE 12, COUPLER, QUICK-MALE 1/2"-12 ORB**
0809-721 QUANTITY: 1
- **SIZE 16, COUPLER, QUICK-MALE 5/8"-12 ORB**
0809-727 QUANTITY: 1
- **SIZE 19, COUPLER, QUICK-MALE 3/4"-12 ORB**
0809-729 QUANTITY: 1



- **SIZE 12, COUPLER, QUICK-FEMALE 1/2"-12 ORB**
0809-720 QUANTITY: 1
- **SIZE 16, COUPLER, QUICK-FEMALE 5/8"-12 ORB**
0809-726 QUANTITY: 1
- **SIZE 19, COUPLER, QUICK-FEMALE 3/4"-12 ORB**
0809-728 QUANTITY: 1

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.


LOADER HOSES: **LOADER HOSE BRACKET**

M

▼ **MODEL 26-84**

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

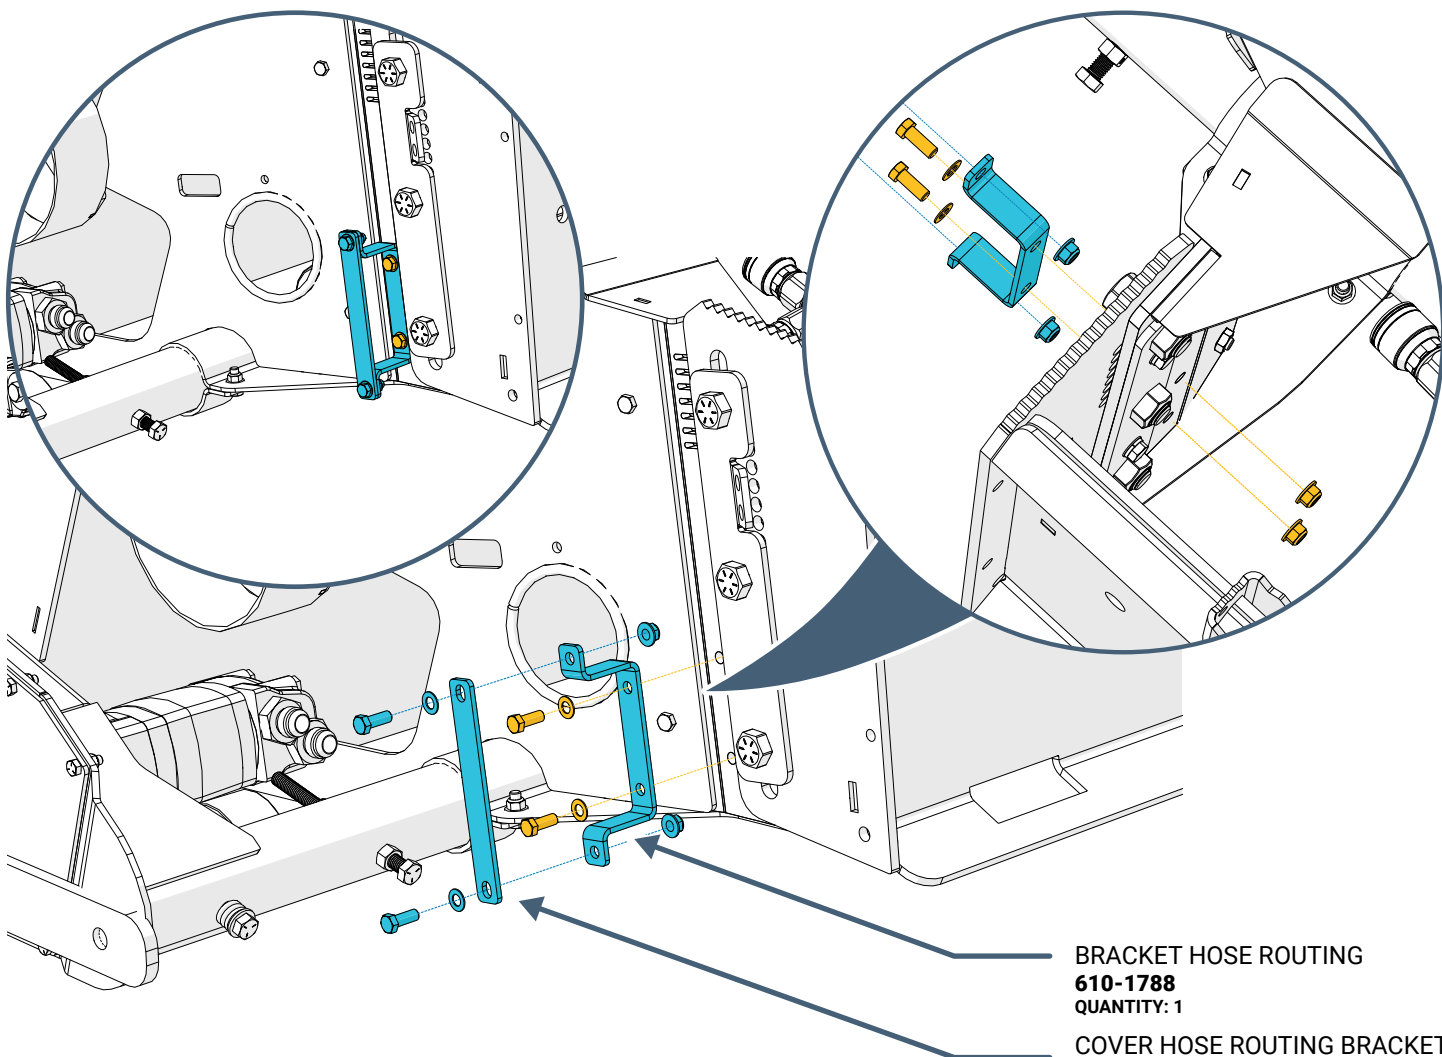

BRACKET HOSE ROUTING

610-1788

QUANTITY: 1

COVER HOSE ROUTING BRACKET


610-1789

QUANTITY: 1

HOSE BRACKET FASTENERS

INCLUDES

- **BOLT HEX-3/8"X1"-GR5 Z&C**
8002-202 QUANTITY: 4
- **WASHER FLAT SAE-3/8"-Z&C**
8050-201 QUANTITY: 4
- **NUT FLG NYL-3/8"-Z&C**
8041-201 QUANTITY: 4

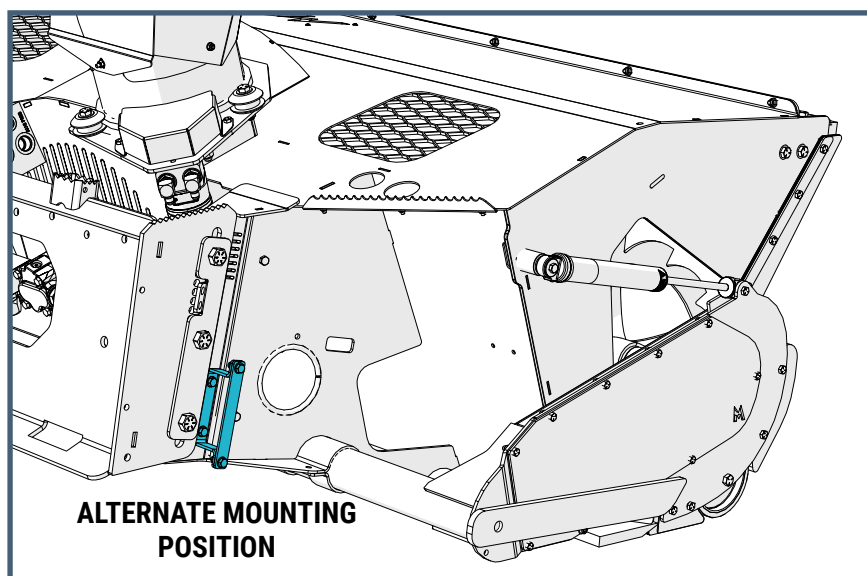

**ALTERNATE MOUNTING
POSITION**

IMPELLER


▼ MODEL 26-84



REQUIRES
LOCTITE 271

PROPRIETARY AND CONFIDENTIAL


The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

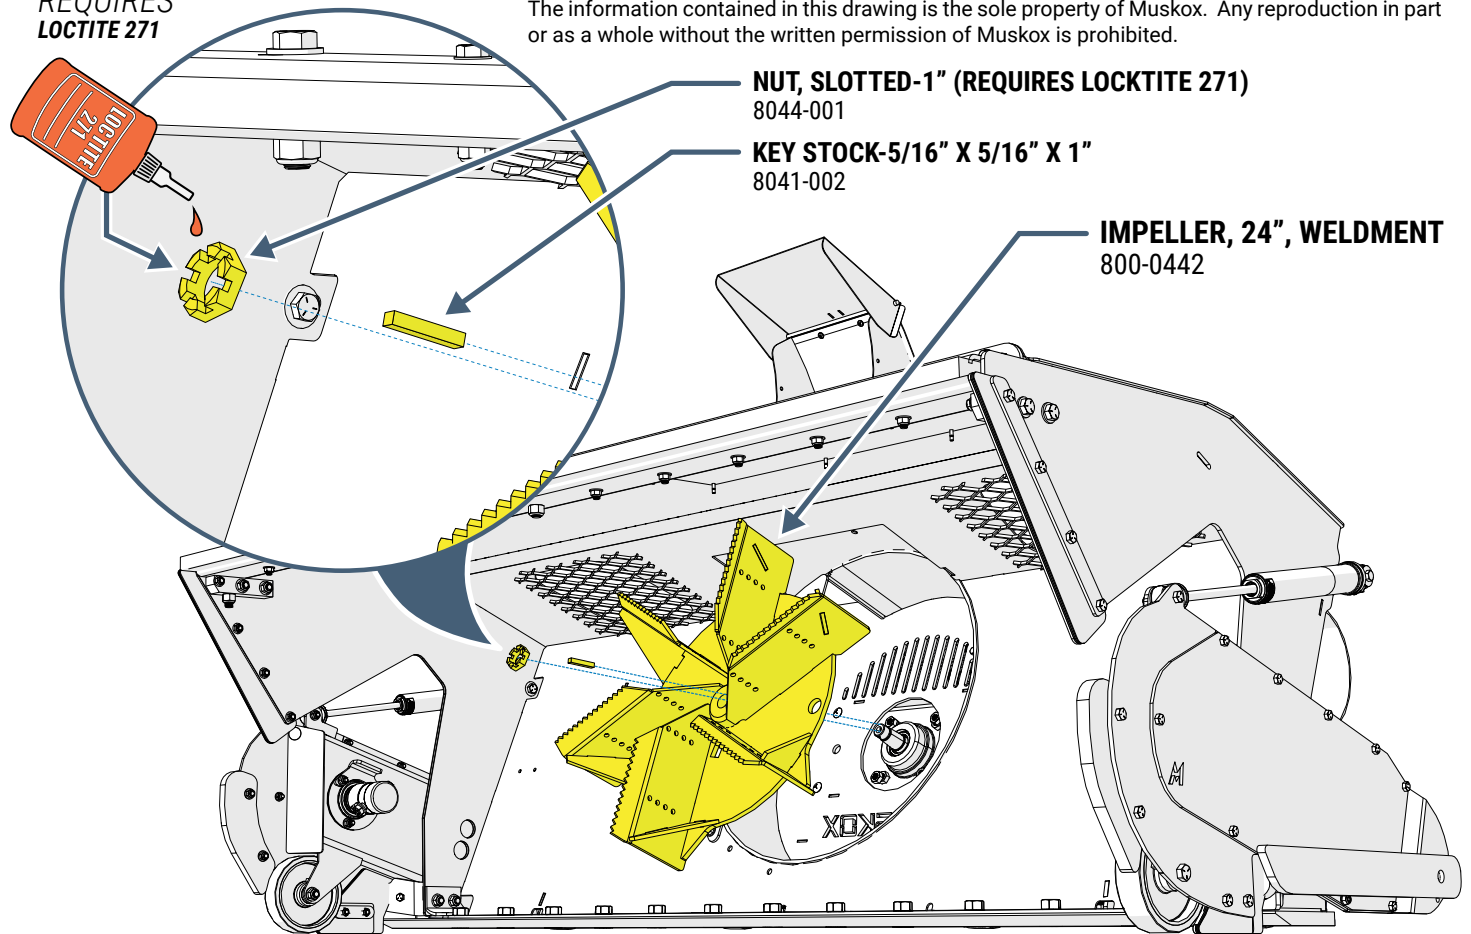

NUT, SLOTTED-1" (REQUIRES LOCKTITE 271)
8044-001

KEY STOCK-5/16" X 5/16" X 1"
8041-002

IMPELLER, 24", WELDMENT
800-0442

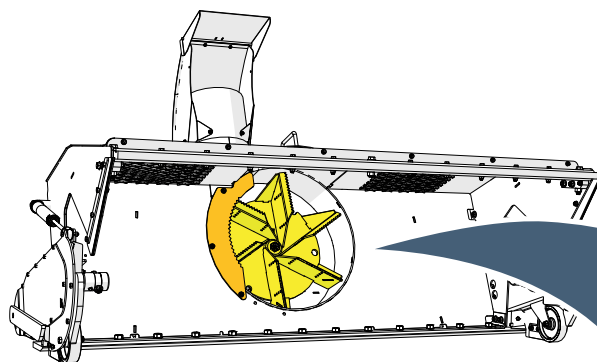


FAN SNOW RETAINER

610-1813 QUANTITY: 1
(SHOWN IN ORANGE) ●

INCLUDES

- BOLT HEX-3/8"X1"-GR5 Z&C
8002-202 QUANTITY: 1
- NUT FLG NYL-3/8"-Z&C
8041-201 QUANTITY: 3

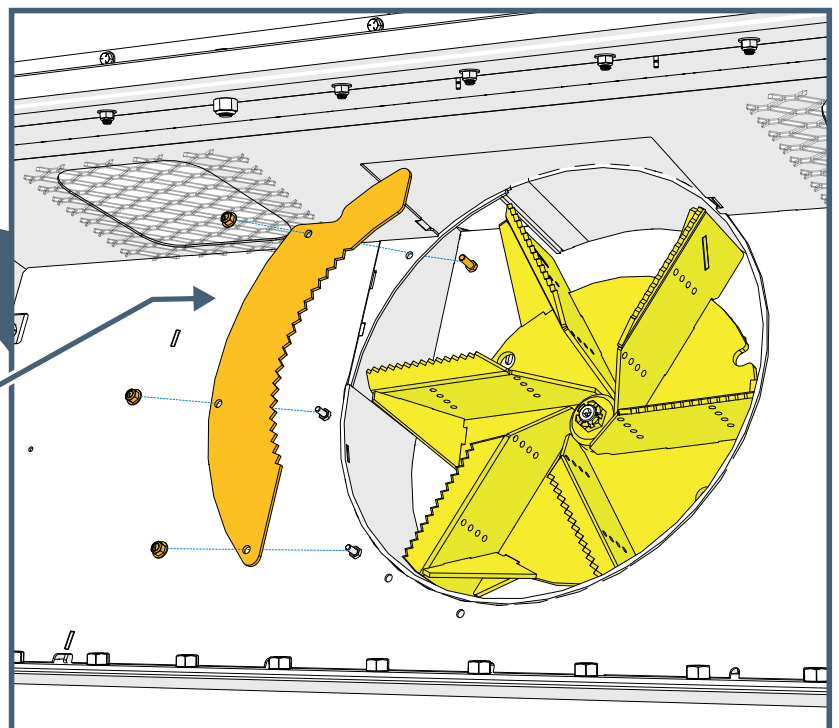

SCAN
HERE!



**VIDEO TUTORIAL:
REPLACING IMPELLER FAN**


LEVELING WHEEL



▼ MODEL 26-84

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

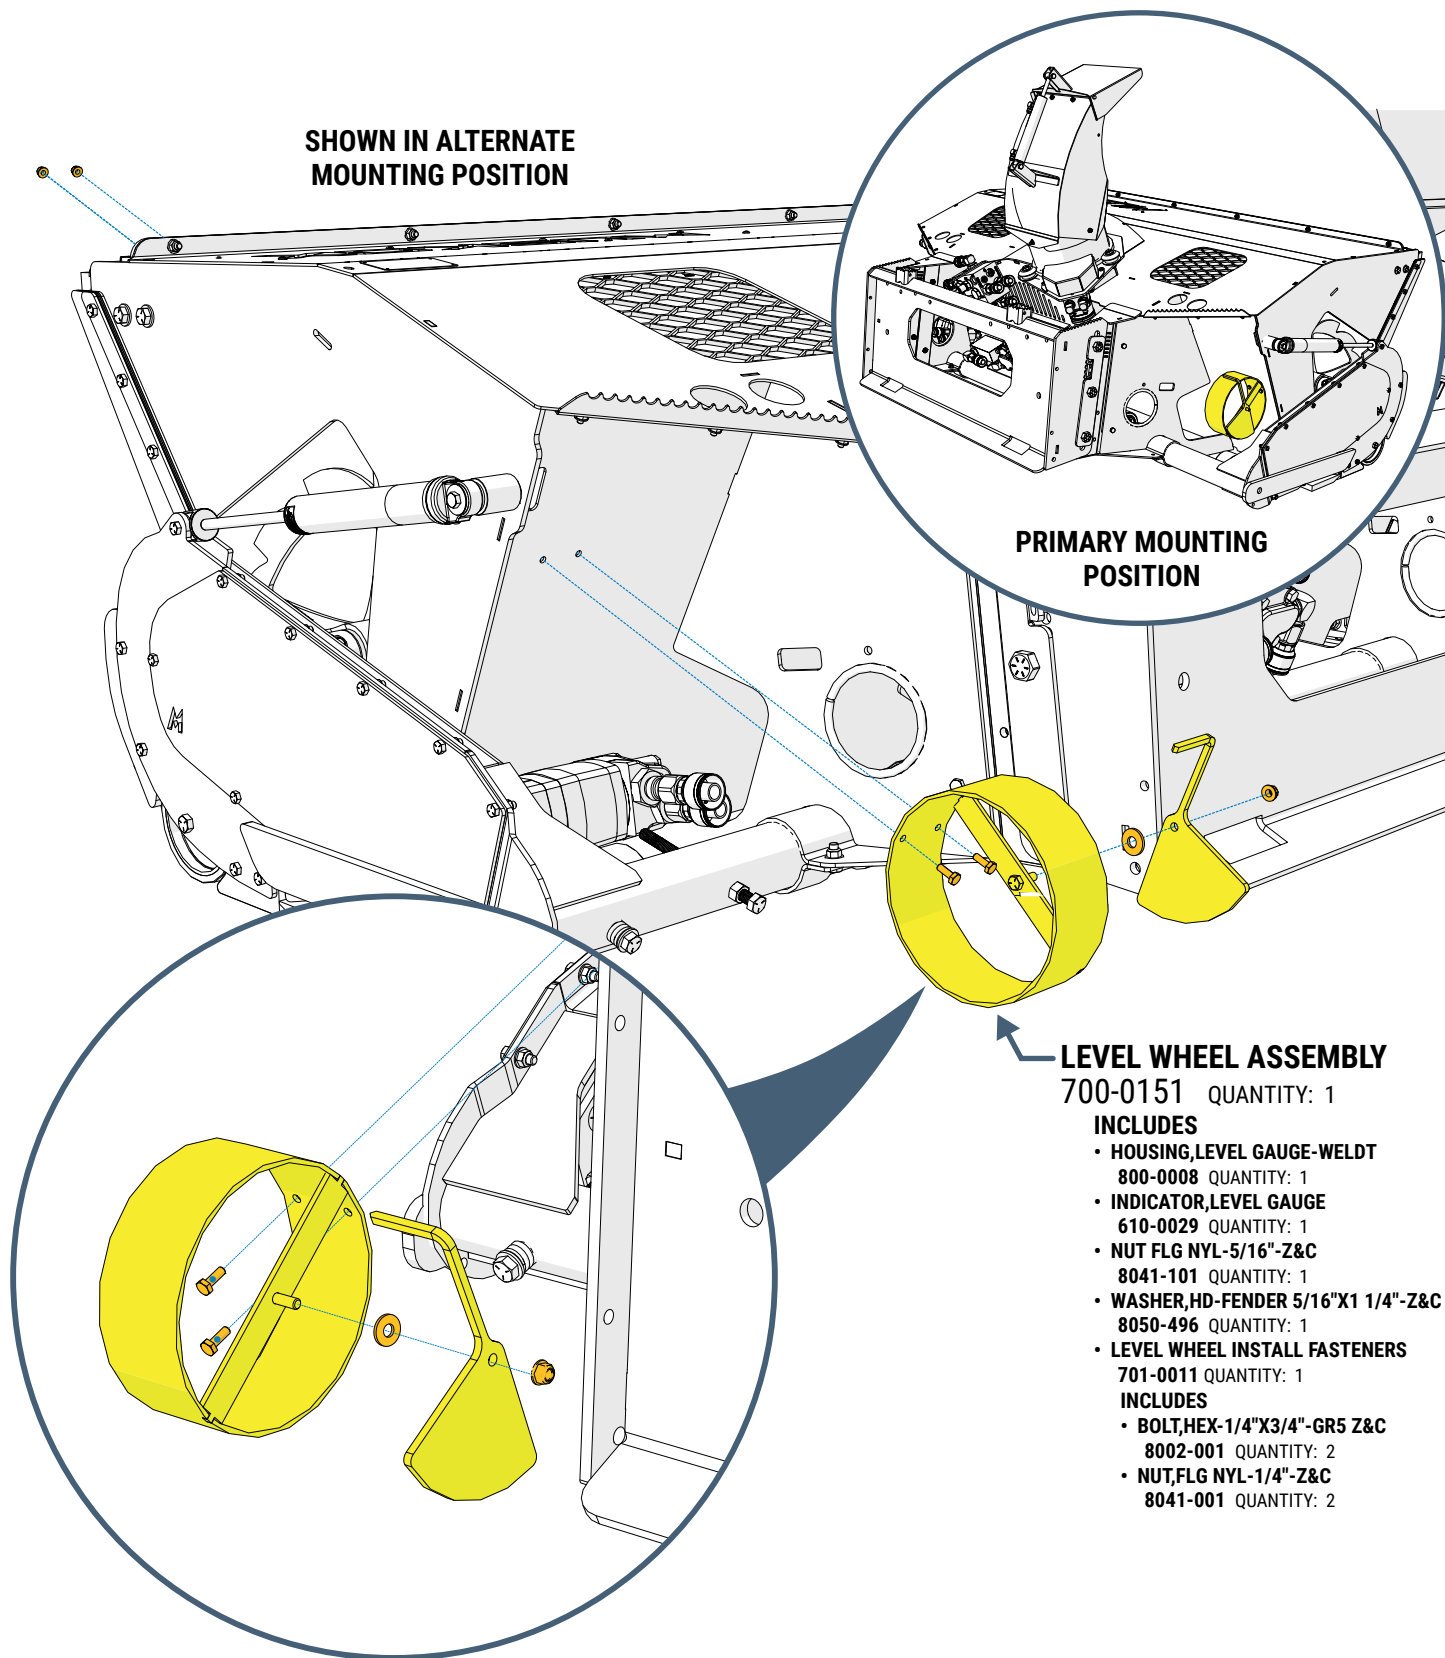


PIVOT ARM SYSTEM: MAIN COMPONENTS

▼ MODEL 26-84



PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

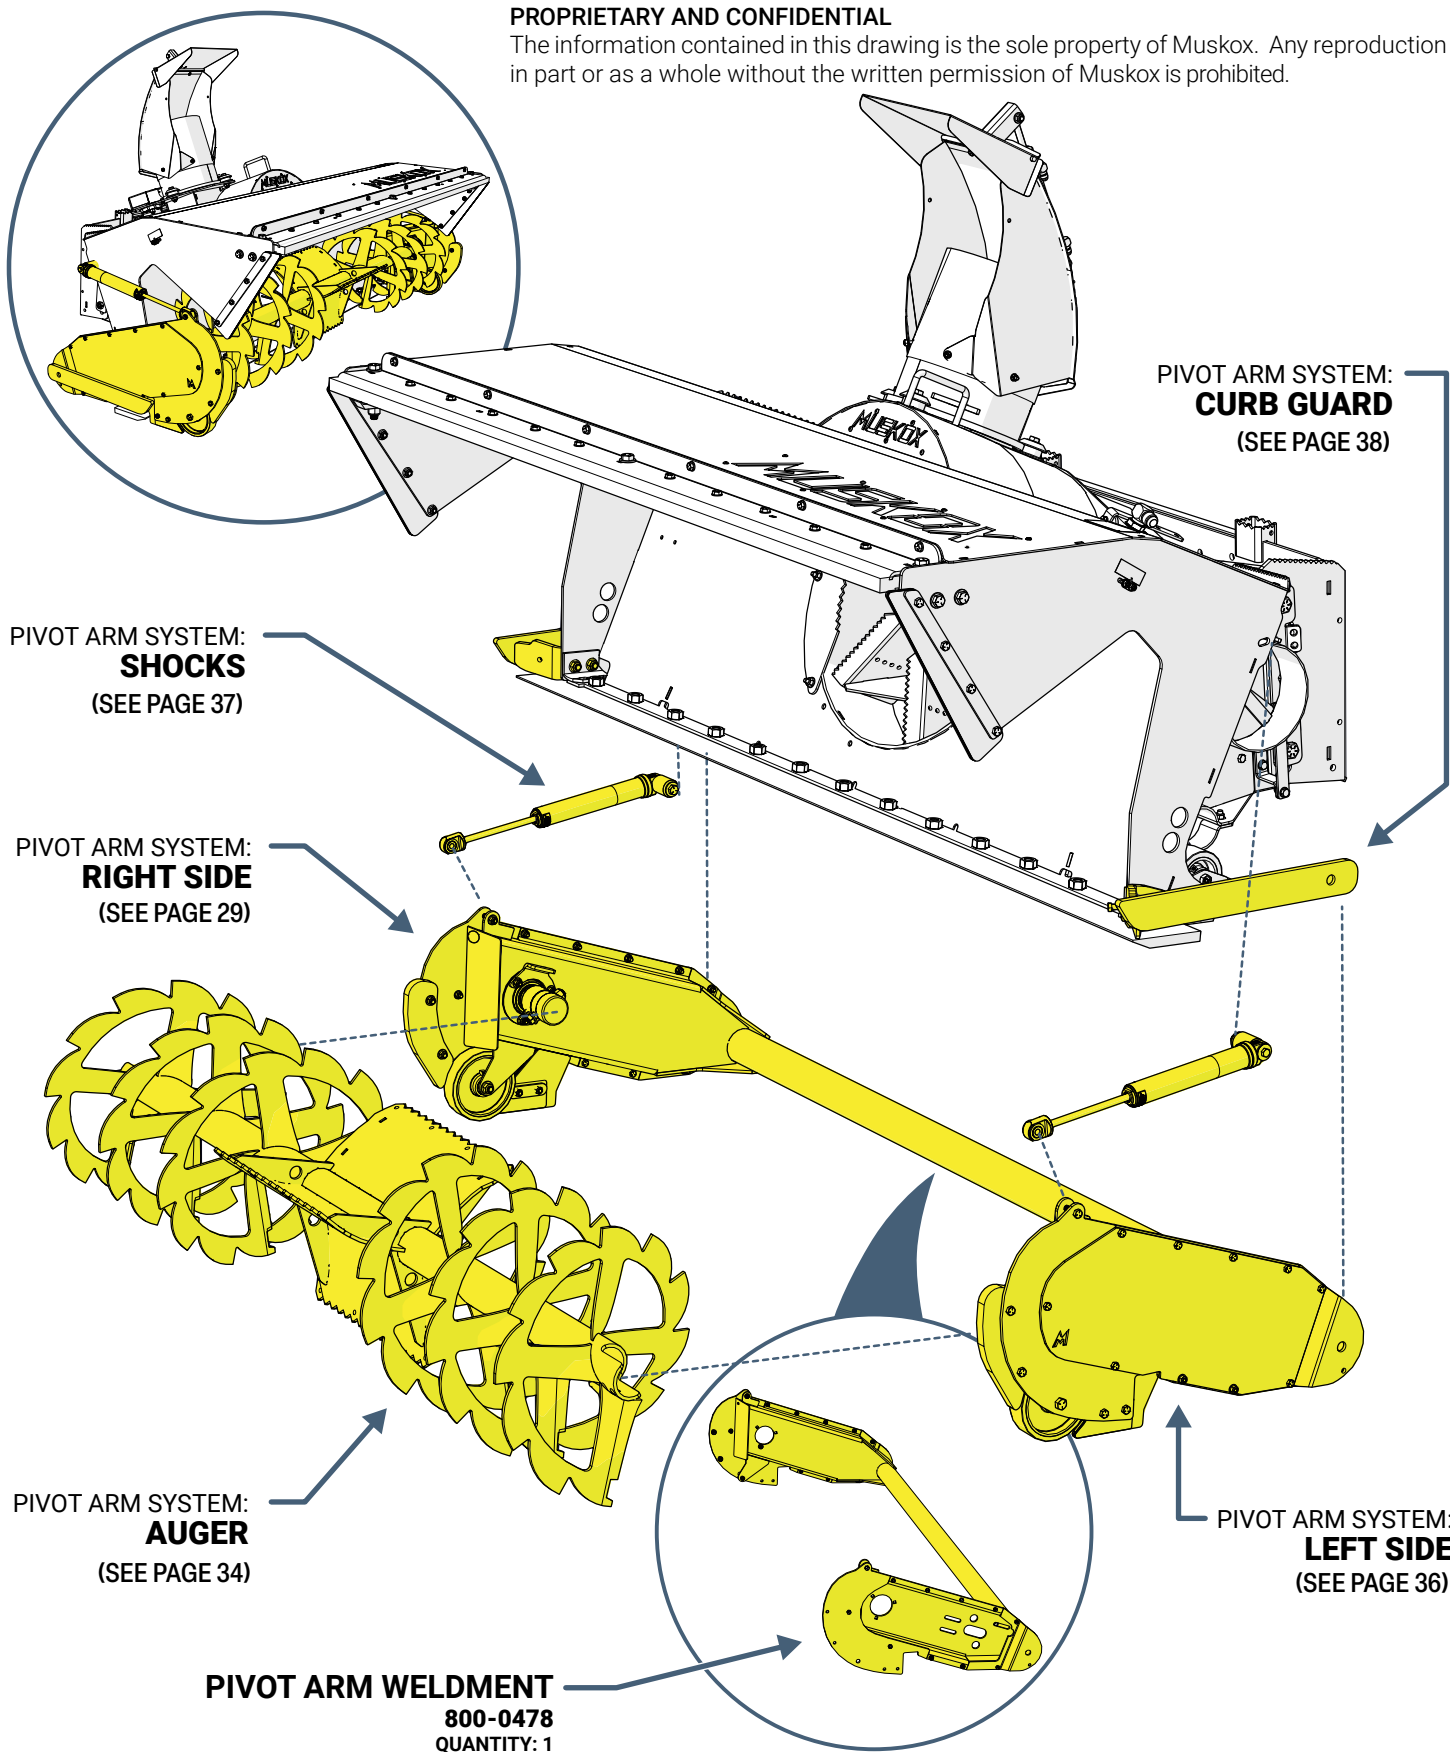

PIVOT ARM SYSTEM: ACCESS PANELS



▼ MODEL 26-84

PROPRIETARY AND CONFIDENTIAL


The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

RIGHT SIDE ACCESS PANEL


ACCESS PANEL INSTALL FASTENERS

INCLUDES


- BOLT HEX-5/16"X1"-GR5 Z&C 8002-103 QUANTITY: 8
- BOLT HEX-5/16"X3/4"-GR5 Z&C 8002-102 QUANTITY: 2
- NUT FLG NYL-5/16"-Z&C 8041-101 QUANTITY: 10
- WASHER FLAT SAE-5/16"-Z&C 8050-100 QUANTITY: 8

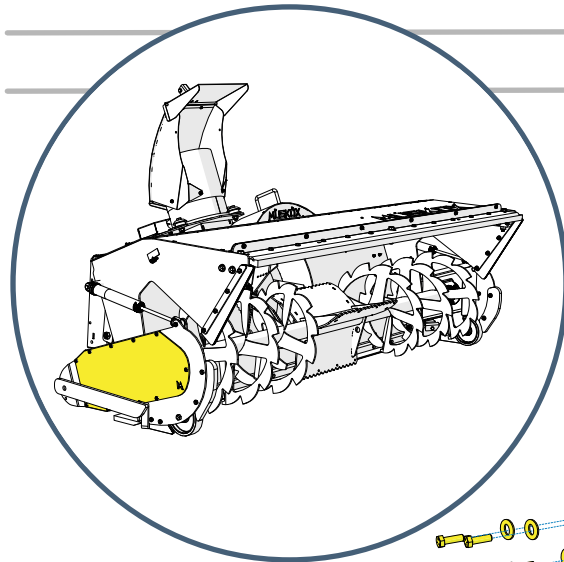

COVER ARM WHEEL AUGER-BLK
610-1682-BLK
QUANTITY: 1

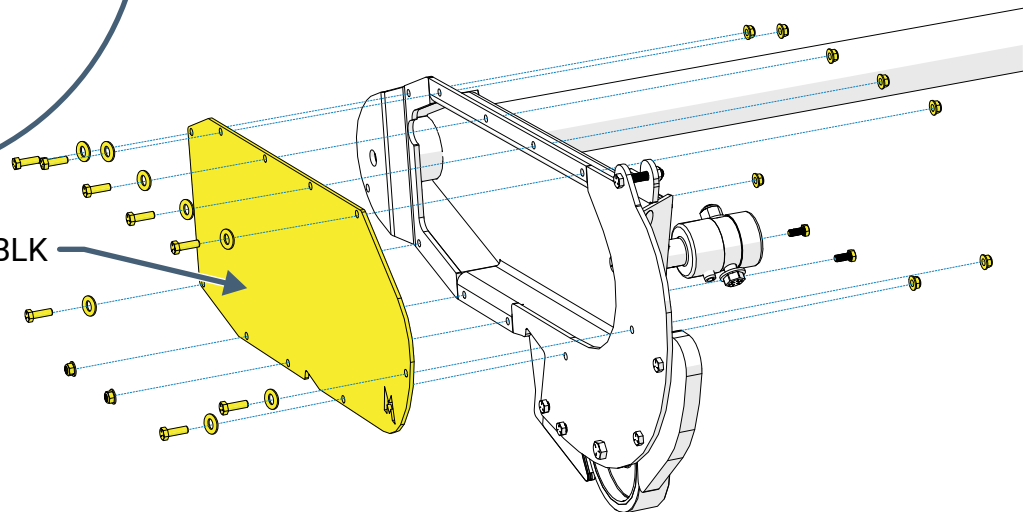

LEFT SIDE ACCESS PANEL

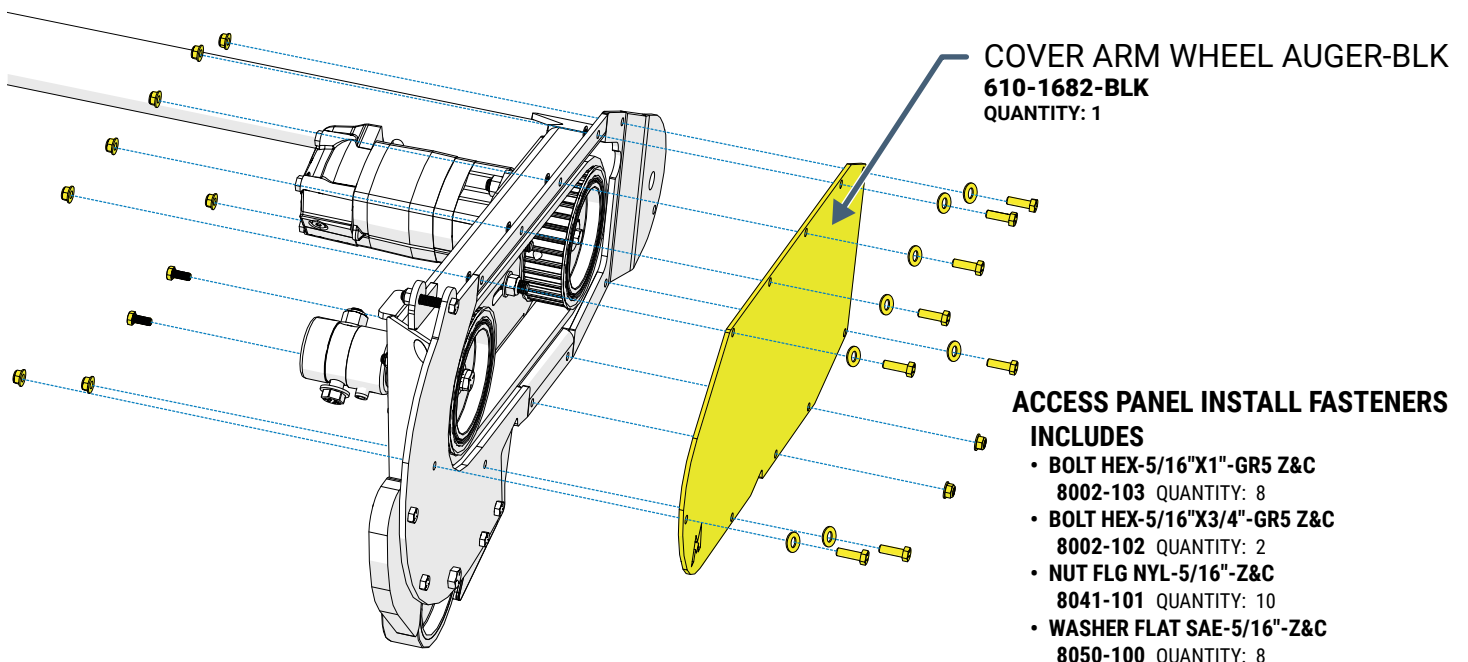

COVER ARM WHEEL AUGER-BLK
610-1682-BLK
QUANTITY: 1


ACCESS PANEL INSTALL FASTENERS

INCLUDES

- BOLT HEX-5/16"X1"-GR5 Z&C 8002-103 QUANTITY: 8
- BOLT HEX-5/16"X3/4"-GR5 Z&C 8002-102 QUANTITY: 2
- NUT FLG NYL-5/16"-Z&C 8041-101 QUANTITY: 10
- WASHER FLAT SAE-5/16"-Z&C 8050-100 QUANTITY: 8

PIVOT ARM SYSTEM: **AUGER**

▼ **MODEL 26-84**

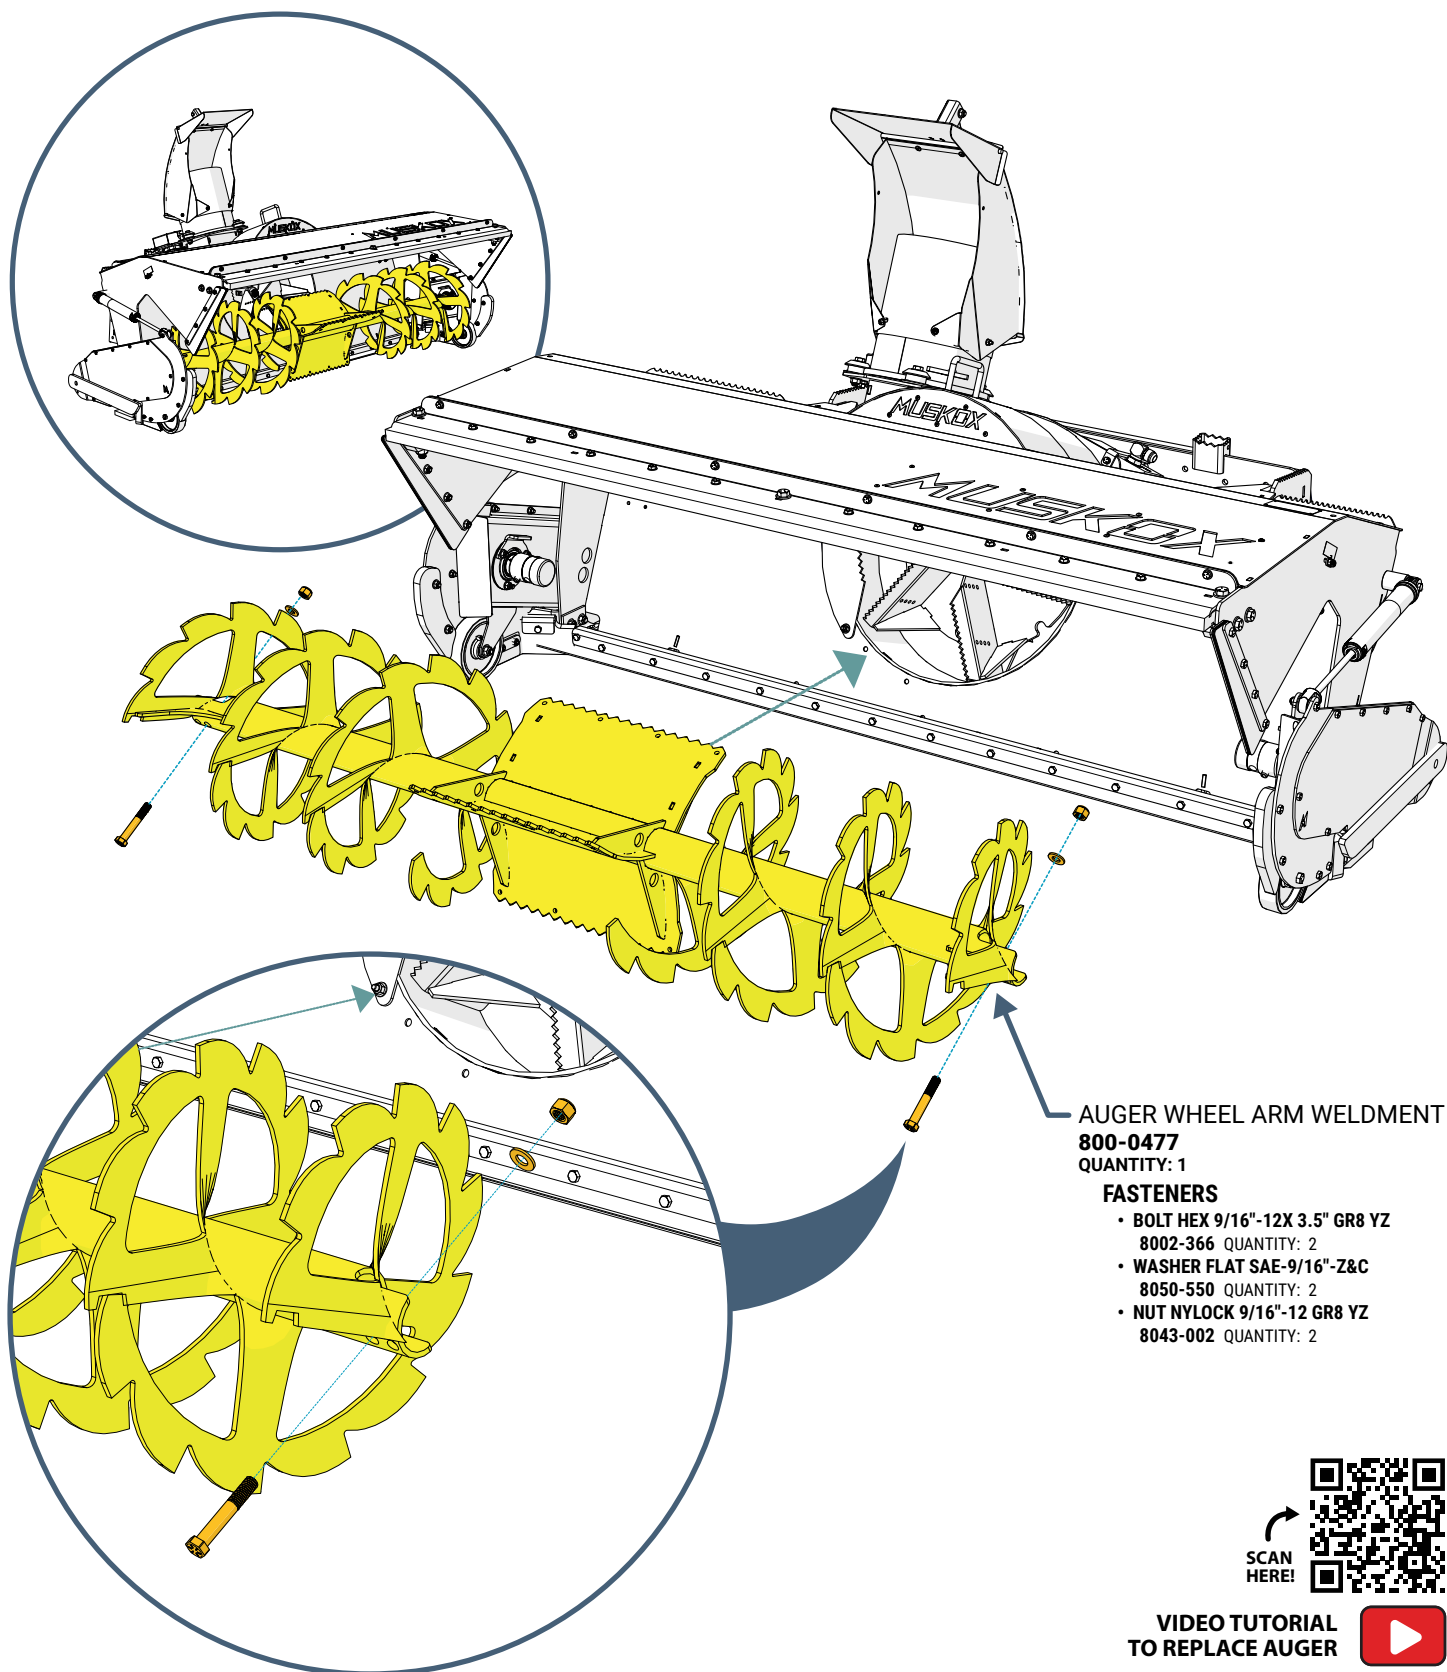

SCAN
HERE!



**VIDEO TUTORIAL
TO REPLACE AUGER**




PIVOT ARM SYSTEM: AUGER MOTOR ASSEMBLY



▼ MODEL 26-84


PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

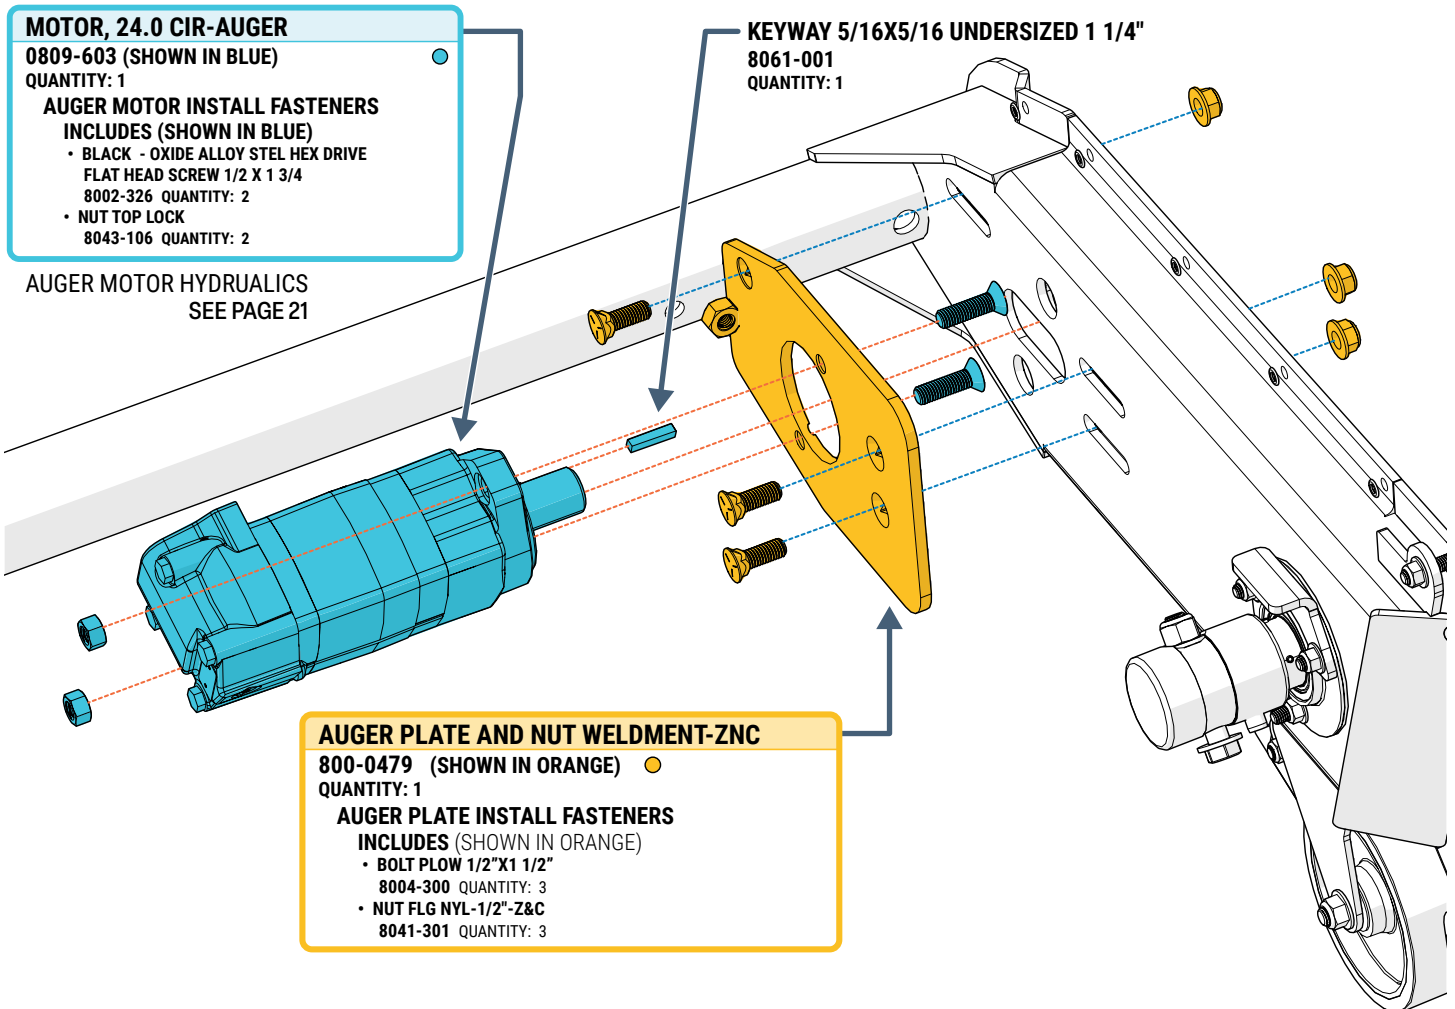

PIVOT ARM SYSTEM: COG BELT TENSIONING

▼ MODEL 26-84

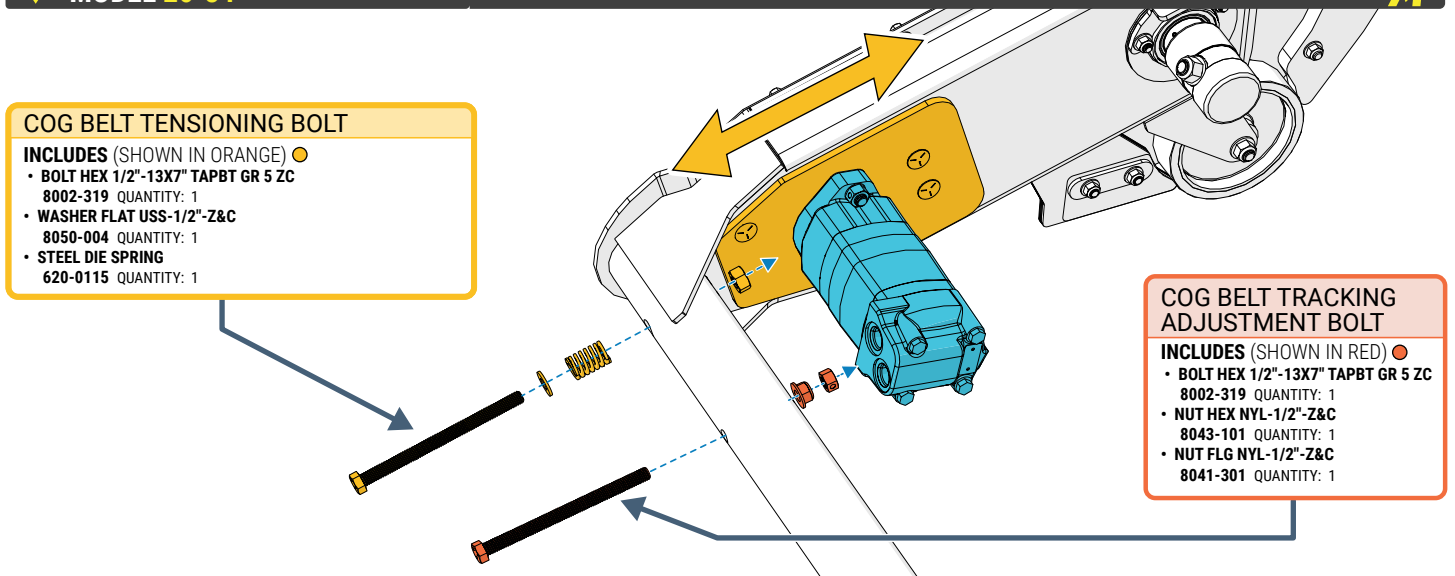


PIVOT ARM SYSTEM: LEFT SIDE - COG BELT

▼ **MODEL 26-84**



PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

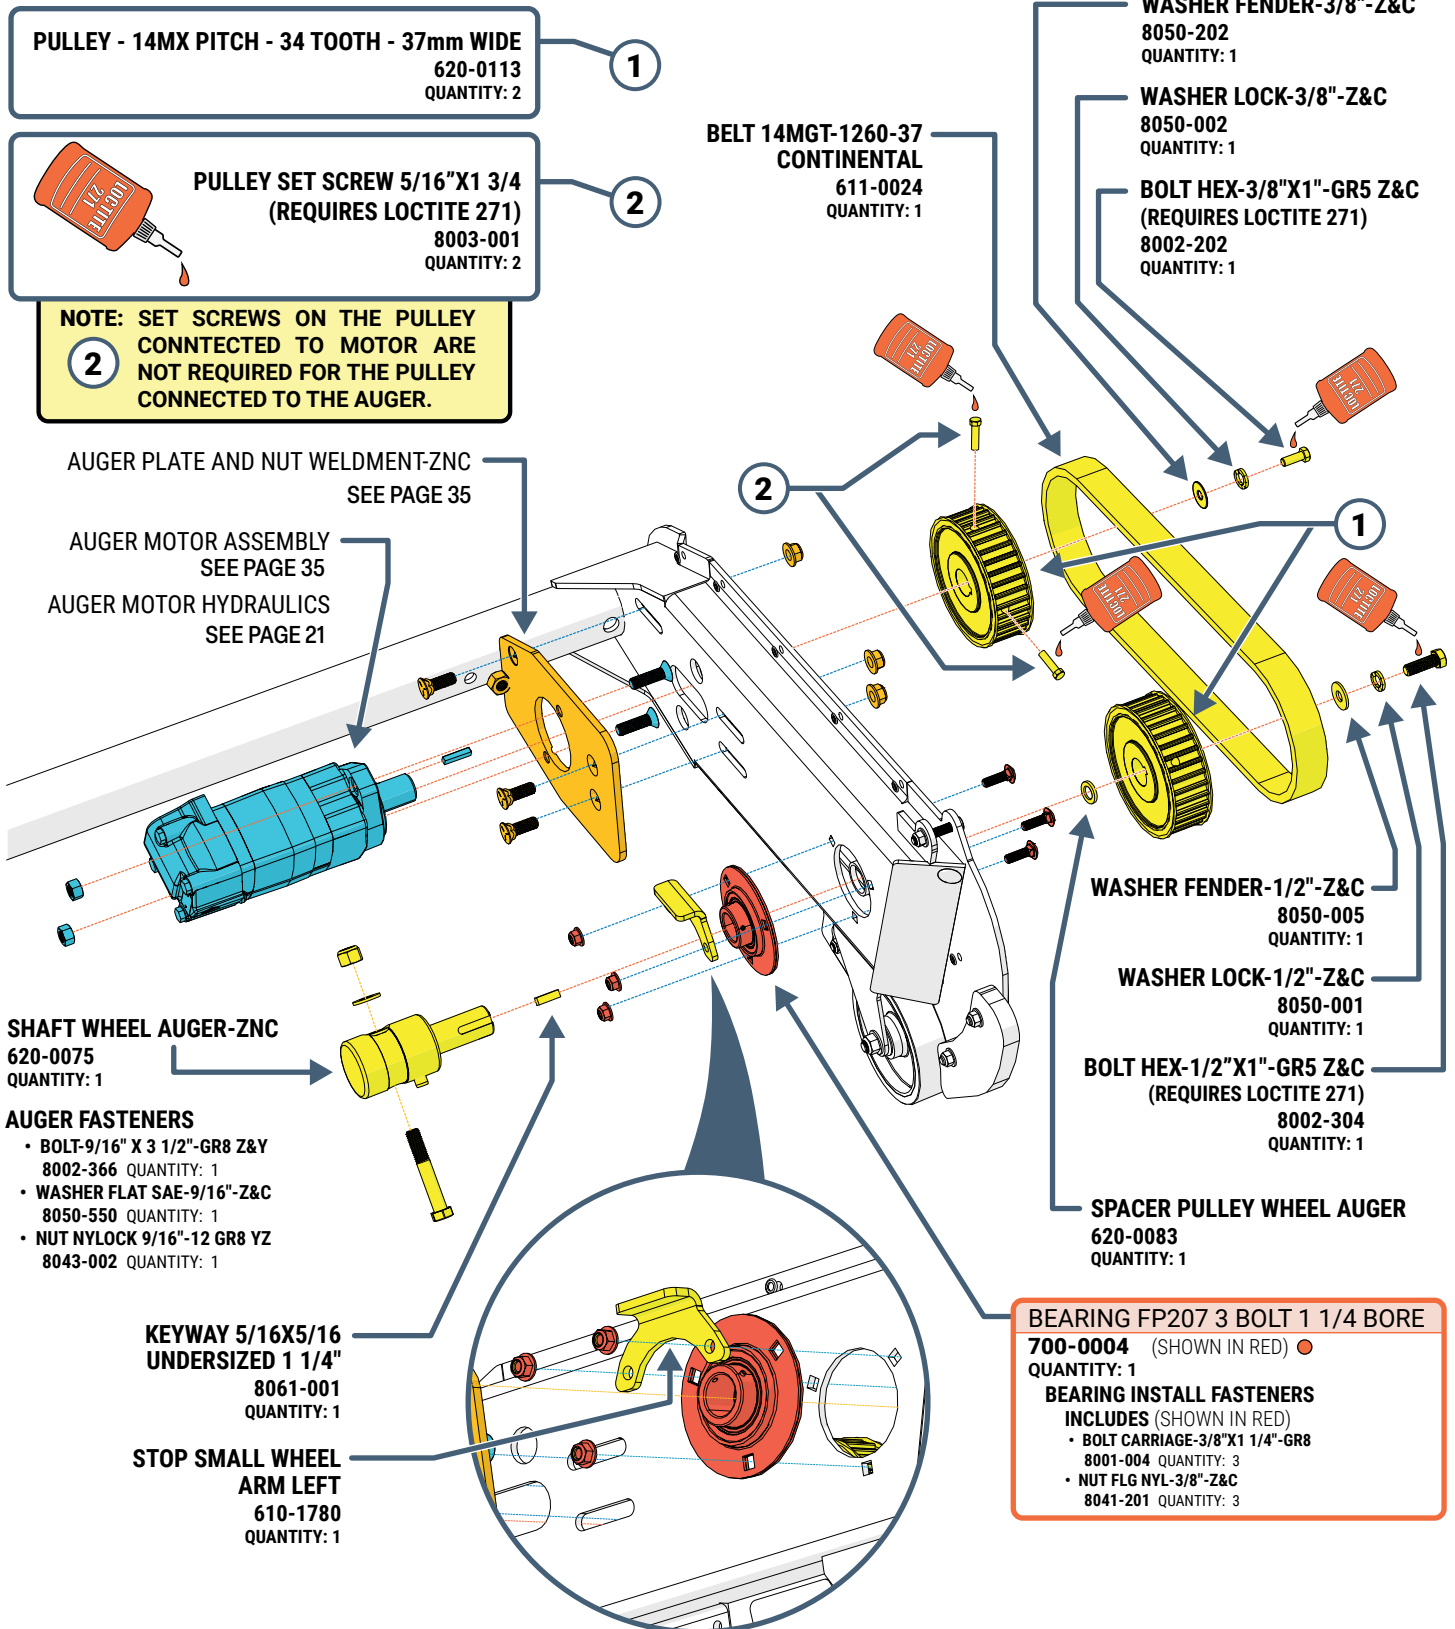


PIVOT ARM SYSTEM: RIGHT SIDE



▼ MODEL 26-84

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

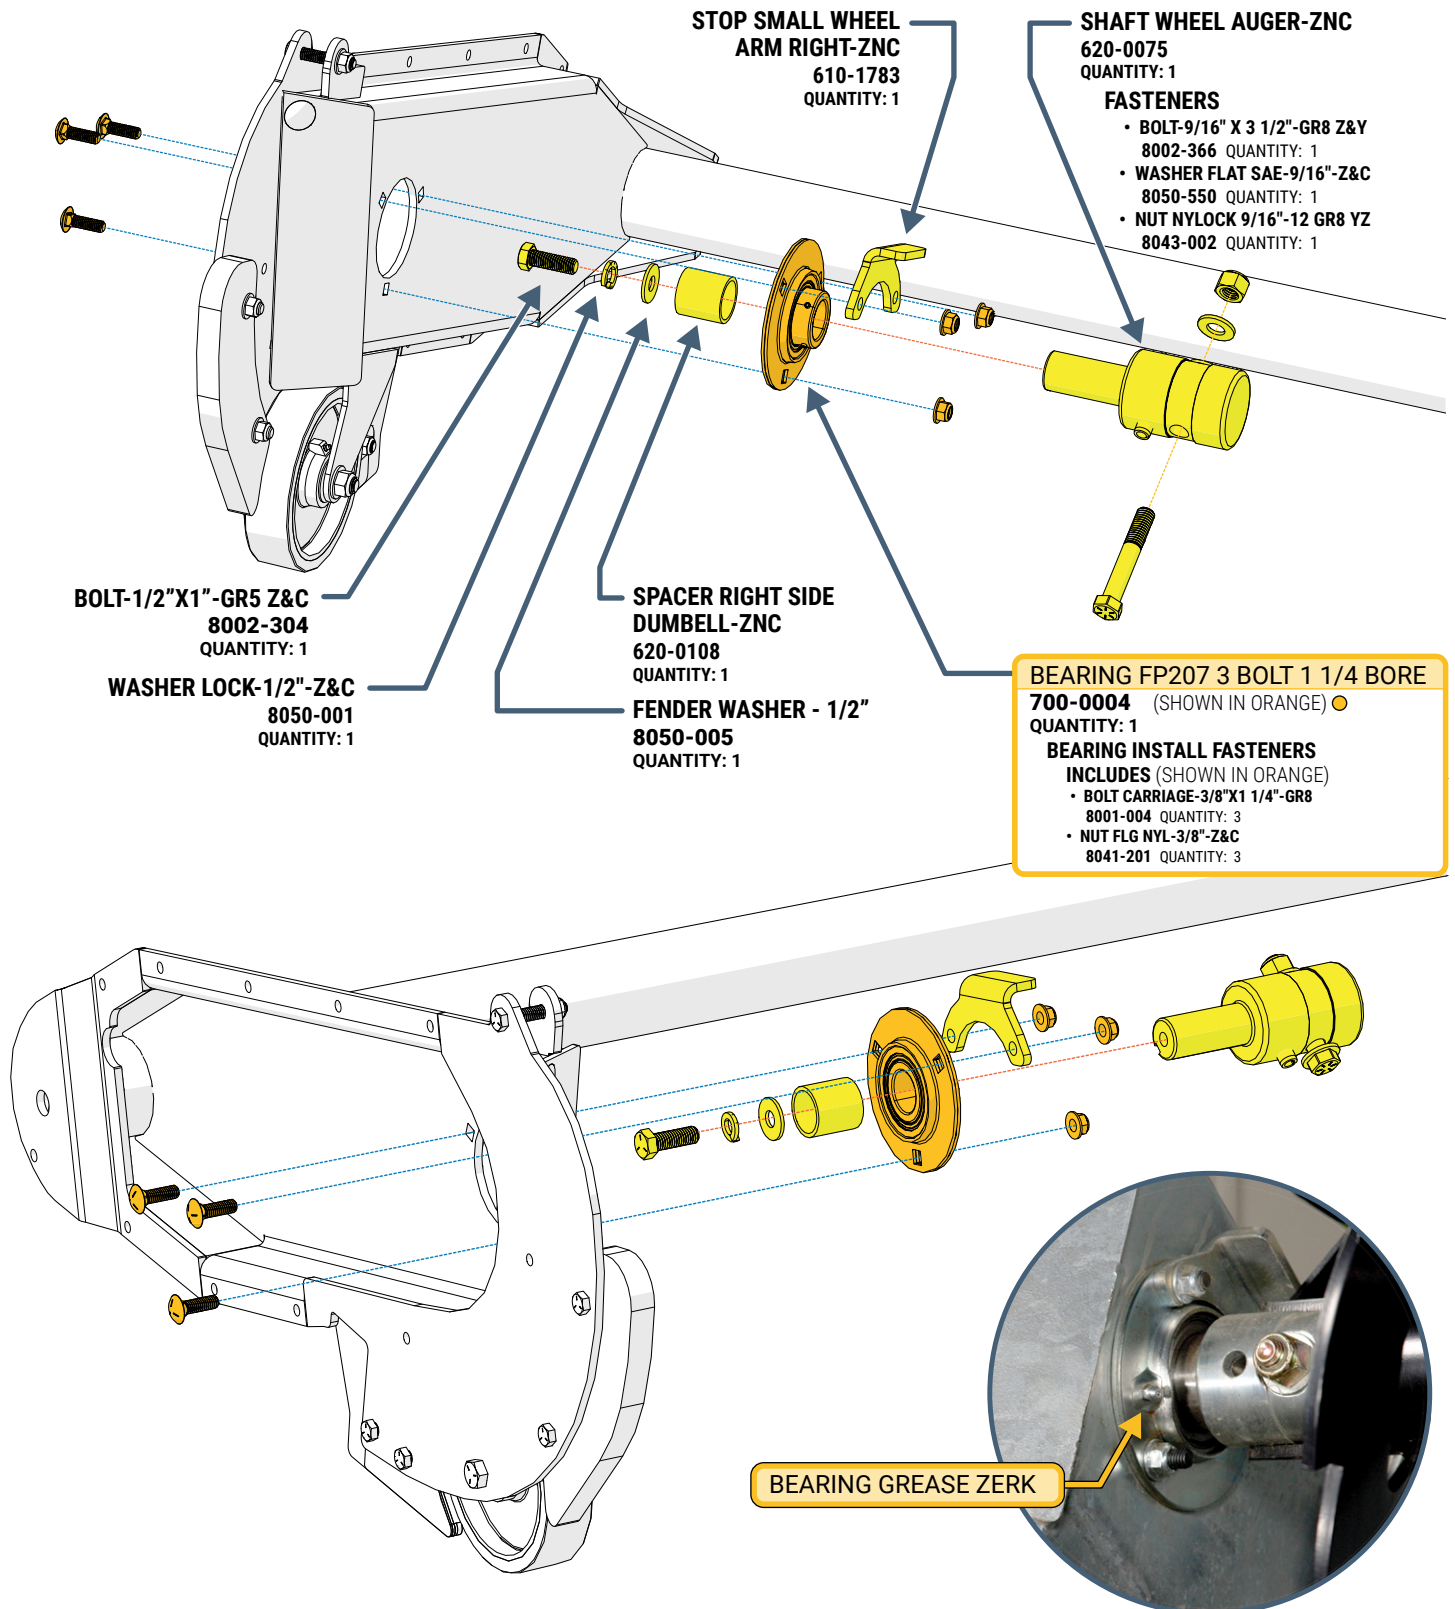


PIVOT ARM SYSTEM: CURB GUARD

▼ MODEL 26-84



PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

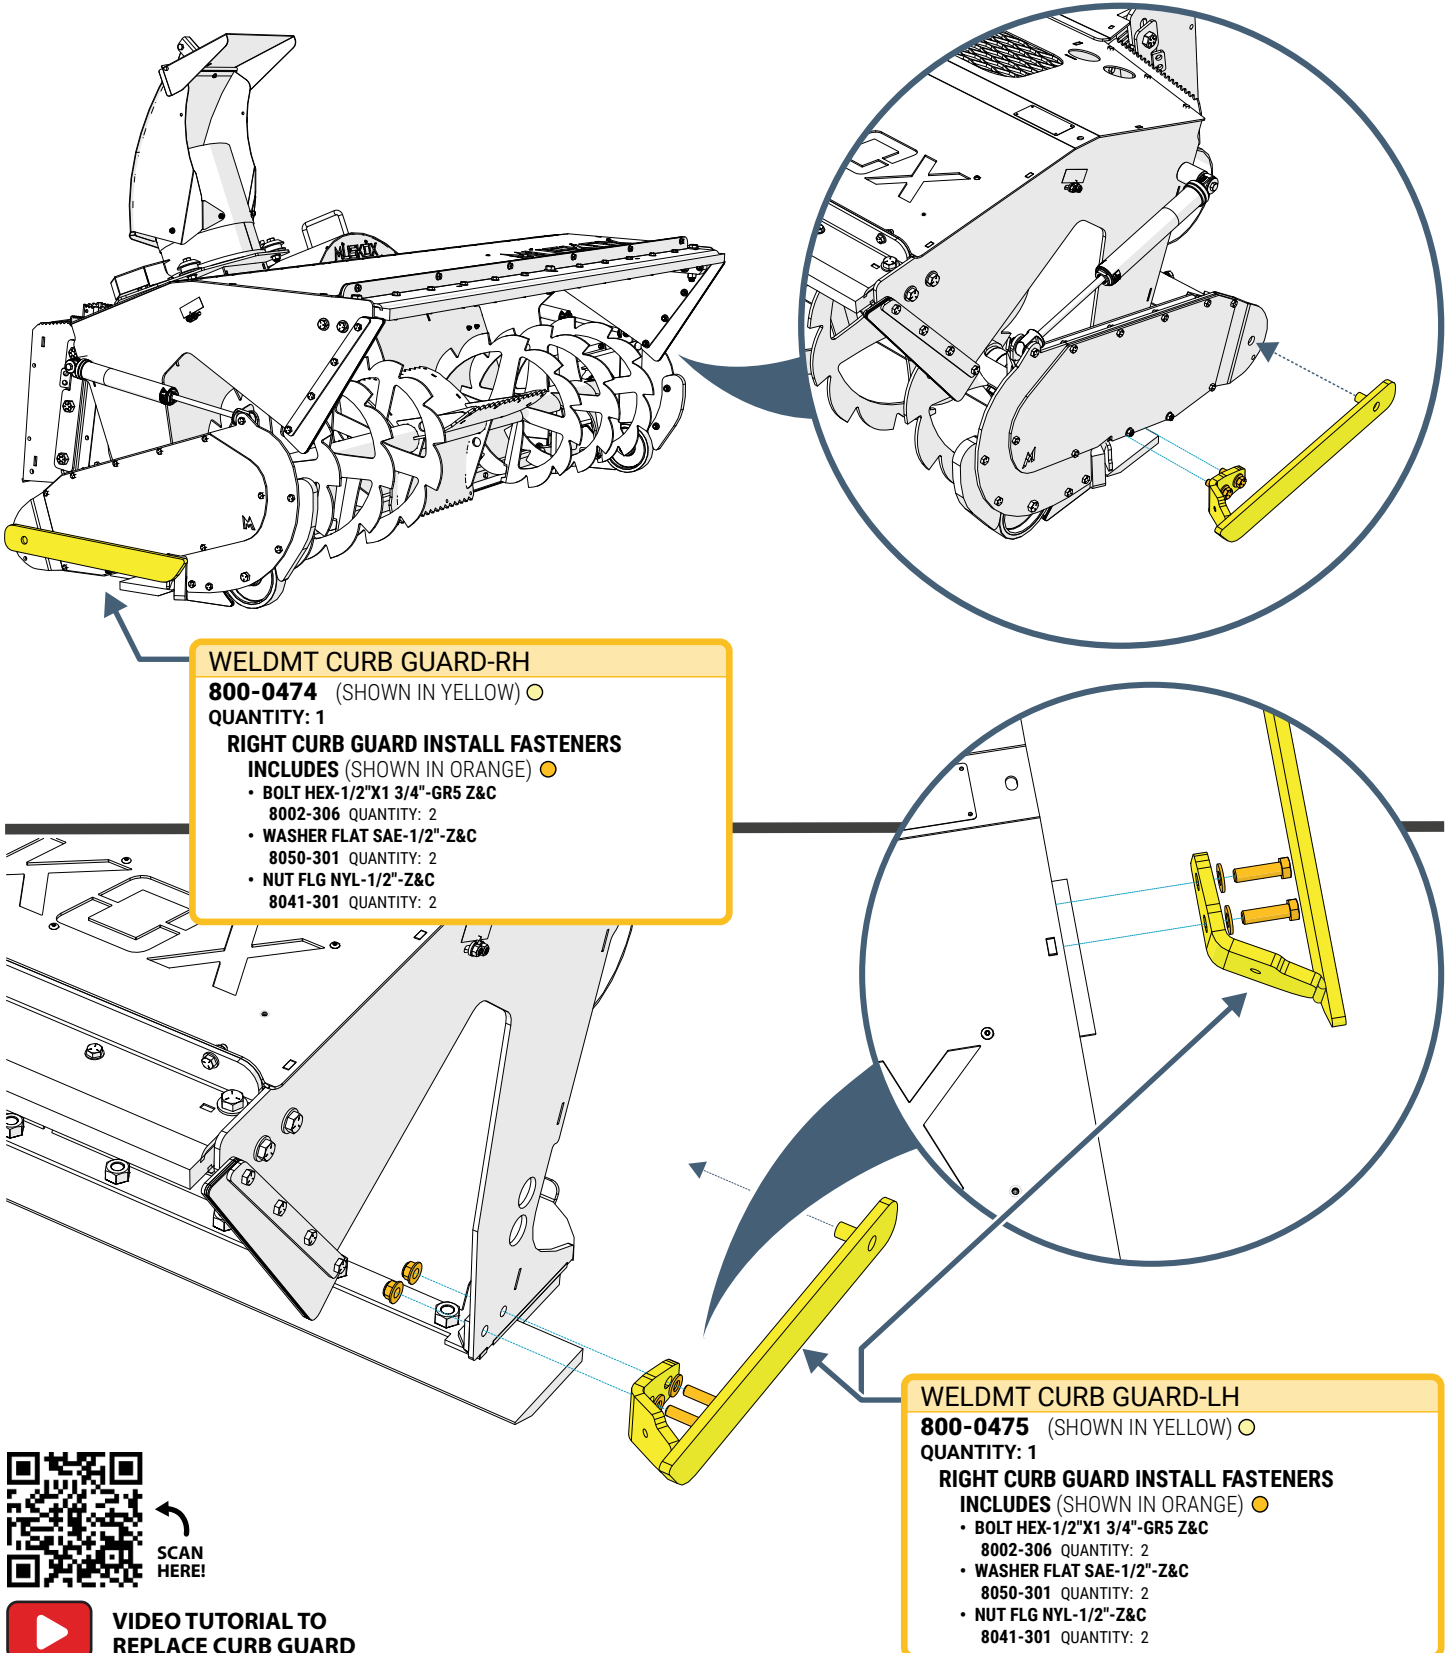

PIVOT ARM SYSTEM: SHOCKS



▼ MODEL 26-84

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

RIGHT SIDE SHOCK

RIGHT SIDE: PARTS IDENTICAL TO THOSE LISTED ON THIS PAGE FOR THE LEFT SIDE SHOCK.




SCAN
HERE!




**VIDEO TUTORIAL: REPLACING
GAS CHARGED SHOCKS**

LEFT SIDE SHOCK

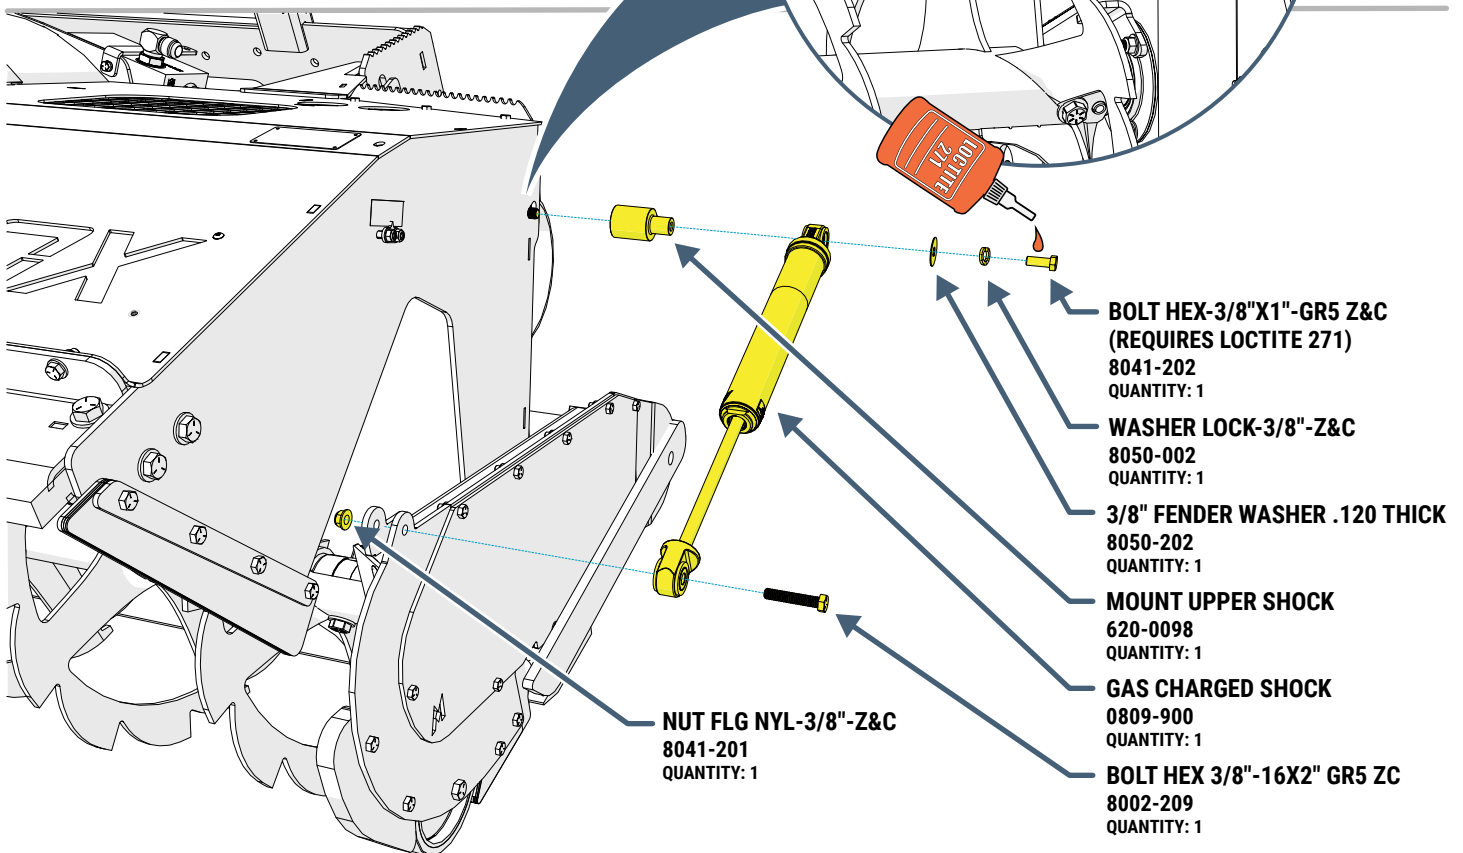

PIVOT ARM SYSTEM: WEARABLES

▼ MODEL 26-84

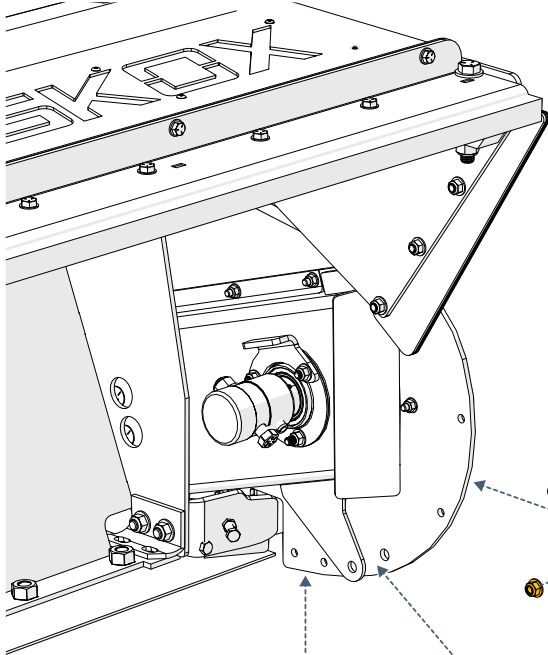

UHMW PIVOT ARM GUARD

611-0036 (SHOWN IN ORANGE) ●
QUANTITY: 2

UHMW PLASTIC FASTENERS

INCLUDES (SHOWN IN ORANGE)

- BOLT HEX-3/8"X1 1/2"-GR5 Z&C
QUANTITY: 4
- NUT FLG NYL-3/8"-Z&C
QUANTITY: 4

SCAN
HERE!



**VIDEO TUTORIAL:
REPLACING UHMW
PIVOT ARM GUARD**

WHEEL 6" X 1.5" CASTER

611-0042

QUANTITY: 2

WHEEL INSTALL FASTENERS


INCLUDES (SHOWN IN YELLOW) ●

- HEX 1/2"-13X3" GR 5 ZC
8002-311 QUANTITY: 2
- NUT FLG NYL-1/2"-Z&C
8041-301 QUANTITY: 2

SCAN
HERE!



**VIDEO TUTORIAL:
REPLACING PIVOT
ARM WHEELS**

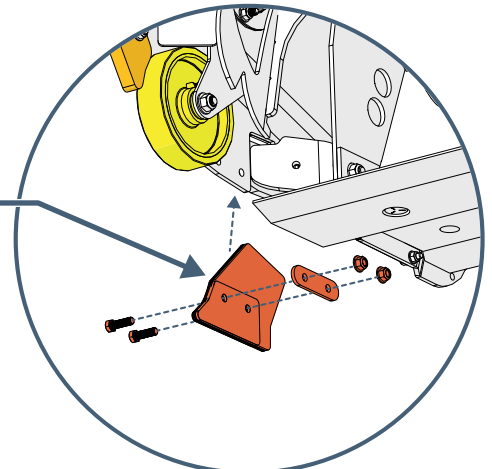

SIDE SKIRT SNOW GUIDE RUBBER - LH

611-0048

QUANTITY: 1

SNOW GUIDE FASTENERS (SHOWN IN RED) ●

- LOWER METAL STRAP
610-1872 QUANTITY: 1
- BOLT HEX 3/8"-16X1.25" GR5 ZC
8002-206 QUANTITY: 2
- NUT FLG NYL-3/8"-Z&C
8041-201 QUANTITY: 2

FOR USE WITH STEEL LOWER CUT EDGE

SIDE SKIRT SNOW GUIDE RUBBER - RH

611-0049


QUANTITY: 1

SNOW GUIDE FASTENERS (SHOWN IN RED) ●

- LOWER METAL STRAP
610-1872 QUANTITY: 1
- BOLT HEX 3/8"-16X1.25" GR5 ZC
8002-206 QUANTITY: 2
- NUT FLG NYL-3/8"-Z&C
8041-201 QUANTITY: 2

FOR USE WITH STEEL LOWER CUT EDGE

PARTS FOR USE WITH RUBBER LOWER CUT EDGE

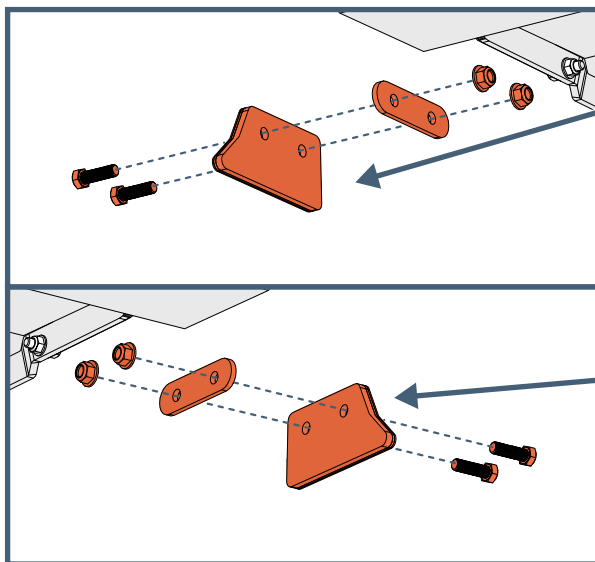

SIDE SKIRT SNOW GUIDE RUBBER - RH

611-0044

QUANTITY: 1

SNOW GUIDE FASTENERS (SHOWN IN RED) ●

- LOWER METAL STRAP
610-1872 QUANTITY: 1
- BOLT HEX 3/8"-16X1.25" GR5 ZC
8002-206 QUANTITY: 2
- NUT FLG NYL-3/8"-Z&C
8041-201 QUANTITY: 2

FOR USE WITH RUBBER LOWER CUT EDGE

SCAN
HERE!



**VIDEO TUTORIAL:
REPLACING PIVOT ARM
RUBBER SIDE SKIRT**

SIDE SKIRT SNOW GUIDE RUBBER - LH

611-0043

QUANTITY: 1

SNOW GUIDE FASTENERS (SHOWN IN RED) ●

- LOWER METAL STRAP
610-1872 QUANTITY: 1
- BOLT HEX 3/8"-16X1.25" GR5 ZC
8002-206 QUANTITY: 2
- NUT FLG NYL-3/8"-Z&C
8041-201 QUANTITY: 2

FOR USE WITH RUBBER LOWER CUT EDGE

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.


RUBBER SNOW GUIDES

M

▼ **MODEL 26-84**

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Muskox. Any reproduction in part or as a whole without the written permission of Muskox is prohibited.

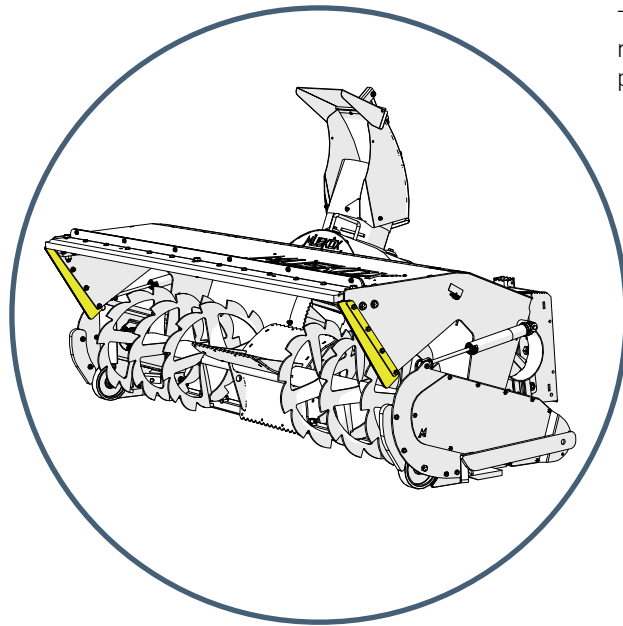

FASTENERS

HEX 3/8"-16X2.5" GR5 ZC

0802-210
QUANTITY: 2

HEX 3/8"-16X1.25" GR5 ZC

0802-206
QUANTITY: 6

NUT FLG NYL-3/8"-Z&C


8041-201
QUANTITY: 8

MOUNT RUBBER SNOW GUIDE-ZNC

610-1736
QUANTITY: 2

SNOW GUIDE RUBBER -RH


611-0034
QUANTITY: 1
(HAS NOTCH)

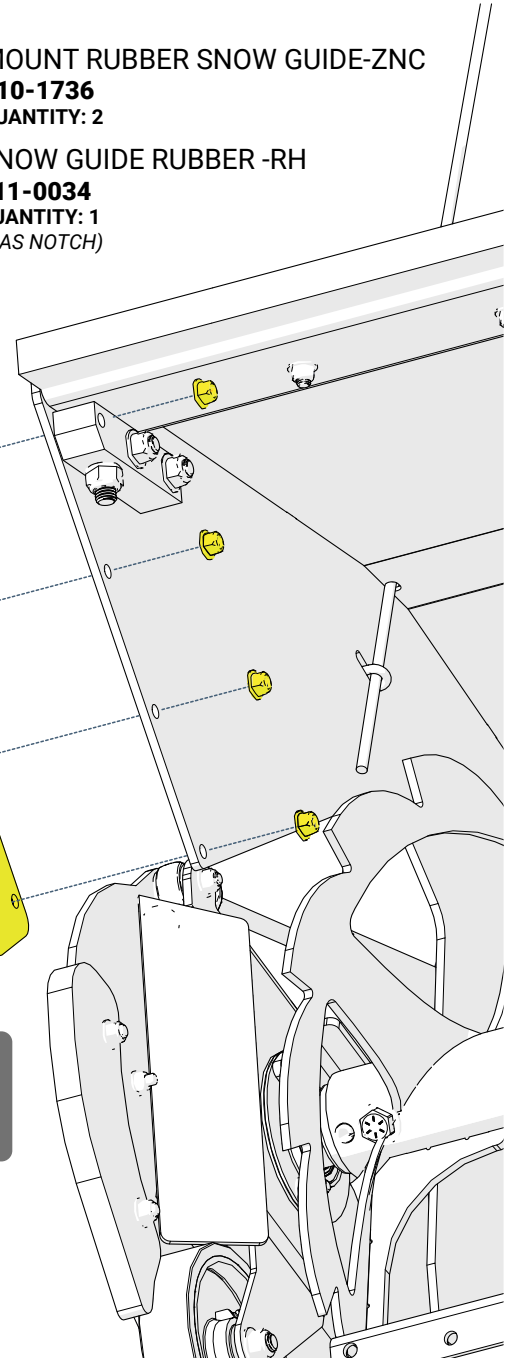

NOTE:
THERE IS A NOTCH
ON THE RIGHT HAND
SNOW GUIDE.

SNOW GUIDE RUBBER - LH

611-0026
QUANTITY: 1
(DOES NOT HAVE NOTCH)

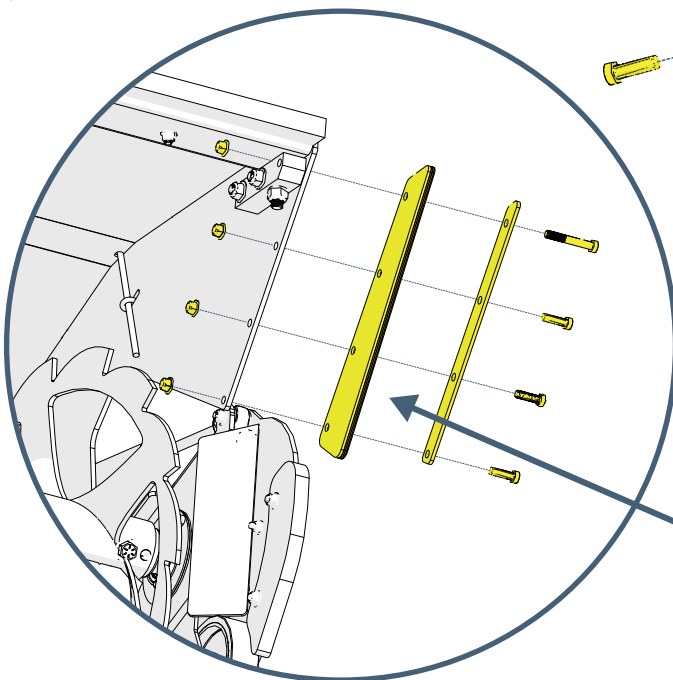

**VIDEO TUTORIAL: REPLACING
RUBBER SNOW GUIDE**



BOLT TORQUE SPECIFICATIONS

GENERAL TORQUE SPECIFICATION TABLE

Use the following chart when determining bolt torque specifications when special torques are not given. Always use grade 5 or better when replacing bolts.


SAE BOLT TORQUE SPECIFICATIONS

NOTE: The following torque values are for use with extreme pressure lubricants, plating or hard washer applications. Increase torque 15 percent when using hardware that is unplated and either dry or lubricated with engine oil.

SAE GRADE 5 TORQUE						SAE GRADE 8 TORQUE			
Bolt Size		Pounds Feet		Newton-Meters		Pounds Feet		Newton Meters	
Inches	Millimeters	UNC	UNF	UNC	UNF	UNC	UNF	UNC	UNF
1/4	6.35	8	9	11	12	10	13	14	18
5/16	7.94	14	17	19	23	20	25	27	34
3/8	9.53	30	36	41	49	38	46	52	62
7/16	11.11	46	54	62	73	60	71	81	96
1/2	12.70	68	82	92	111	94	112	127	152
9/16	14.29	94	112	127	152	136	163	184	221
5/8	15.88	128	153	174	207	187	224	254	304
3/4	19.05	230	275	312	373	323	395	438	536
7/8	22.23	340	408	461	553	510	612	691	830
1	25.40	493	592	668	803	765	918	1037	1245
1-1/8	25.58	680	748	922	1014	1088	1224	1475	1660
1-1/4	31.75	952	1054	1291	1429	1547	1700	2097	2305
1-3/8	34.93	1241	1428	1683	1936	2023	2312	2743	3135
1-1/2	38.10	1649	1870	2236	2535	2686	3026	3642	4103

BOLT HEAD IDENTIFICATION MARKS AS PER GRADE

NOTE: Manufacturing Marks Will Vary



GRADE 2
No Markings



GRADE 5
3 Radial Lines



GRADE 8
6 Radial Lines

NOTE: Nylock nuts are utilized when greater resistance to vibrating loose is required, and greater operating temperatures are not a factor. In addition, like lock nuts, nylock nuts have a safety feature that if the bolt does vibrate loose, the nut will remain on the screw. Install nylock nuts to the standard torque shown above.

TORQUE SPECIFICATIONS FOR UHMW (PLASTIC) PARTS: Fasteners attached to UHMW (plastic) parts should ONLY be tightened to secure part. DO NOT OVERTIGHTEN or damage may occur to plastic part.

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



MUSKOX

BRING IT. DO IT. OWN IT.

601 FIRST STREET NORTH | MENTOR, MINNESOTA 56736
WWW.MUSKOXMN.COM | 218.288.1905 | SERVICE@MUSKOXMN.COM